

ASN1C

ASN.1 Compiler
Version 7.0
BER Runtime
Reference Manual

The software described in this document is furnished under a license agreement and may be used only in accordance with the terms of this agreement.

Copyright Notice

Copyright ©1997–2016 Objective Systems, Inc. All rights reserved.

This document may be distributed in any form, electronic or otherwise, provided that it is distributed in its entirety and that the copyright and this notice are included.

Author's Contact Information

Comments, suggestions, and inquiries regarding ASN1C may be submitted via electronic mail to info@obj-sys.com.

Contents

1	ASNIC BER/DER Runtime Classes and Library Functions	1
2	Module Index	2
2.1	Modules	2
3	Class Index	3
3.1	Class Hierarchy	3
4	Class Index	4
4.1	Class List	4
5	File Index	5
5.1	File List	5
6	Module Documentation	6
6.1	BER/DER/CER C++ Run-Time Classes.	6
6.2	BER Message Buffer Classes	7
6.2.1	Detailed Description	7
6.3	BER Runtime Library Functions.	8
6.3.1	Detailed Description	8
6.3.2	Typedef Documentation	8
6.3.2.1	Asn1BufLocDescr	8
6.4	BER/DER C Decode Functions.	9
6.4.1	Detailed Description	10
6.4.2	Define Documentation	10
6.4.2.1	xd_utf8str	10
6.4.3	Function Documentation	11
6.4.3.1	berDecCharArray	11
6.4.3.2	xd_16BitCharStr	11
6.4.3.3	xd_32BitCharStr	12

6.4.3.4	<code>xd_bigint</code>	12
6.4.3.5	<code>xd_bitstr</code>	13
6.4.3.6	<code>xd_bitstr_s</code>	13
6.4.3.7	<code>xd_boolean</code>	14
6.4.3.8	<code>xd_charstr</code>	14
6.4.3.9	<code>xd_chkend</code>	15
6.4.3.10	<code>xd_count</code>	15
6.4.3.11	<code>xd_enum</code>	15
6.4.3.12	<code>xd_enumUnsigned</code>	16
6.4.3.13	<code>xd_indeflen_ex</code>	16
6.4.3.14	<code>xd_int16</code>	16
6.4.3.15	<code>xd_int64</code>	17
6.4.3.16	<code>xd_int8</code>	17
6.4.3.17	<code>xd_integer</code>	17
6.4.3.18	<code>xd_len</code>	18
6.4.3.19	<code>xd_match</code>	18
6.4.3.20	<code>xd_match1</code>	19
6.4.3.21	<code>xd_memcpy</code>	19
6.4.3.22	<code>xd_NextElement</code>	19
6.4.3.23	<code>xd_null</code>	20
6.4.3.24	<code>xd_objid</code>	20
6.4.3.25	<code>xd_octstr</code>	20
6.4.3.26	<code>xd_octstr_s</code>	21
6.4.3.27	<code>xd_oid64</code>	21
6.4.3.28	<code>xd_OpenType</code>	22
6.4.3.29	<code>xd_OpenTypeAppend</code>	22
6.4.3.30	<code>xd_OpenTypeExt</code>	22
6.4.3.31	<code>xd_real</code>	23
6.4.3.32	<code>xd_real10</code>	23
6.4.3.33	<code>xd_reloid</code>	23
6.4.3.34	<code>xd_setp</code>	24
6.4.3.35	<code>xd_tag</code>	24
6.4.3.36	<code>xd_Tag1AndLen</code>	25
6.4.3.37	<code>xd_tag_len</code>	25
6.4.3.38	<code>xd_uint16</code>	26
6.4.3.39	<code>xd_uint64</code>	26
6.4.3.40	<code>xd_uint8</code>	26

6.4.3.41	<code>xd_unsigned</code>	27
6.5	BER/DER C File Functions.	28
6.5.1	Detailed Description	28
6.5.2	Function Documentation	28
6.5.2.1	<code>xdf_len</code>	28
6.5.2.2	<code>xdf_ReadContents</code>	28
6.5.2.3	<code>xdf_ReadPastEOC</code>	29
6.5.2.4	<code>xdf_tag</code>	29
6.5.2.5	<code>xdf_TagAndLen</code>	30
6.6	BER/DER C Encode Functions.	31
6.6.1	Detailed Description	32
6.6.2	Define Documentation	32
6.6.2.1	<code>xe_utf8str</code>	32
6.6.3	Function Documentation	32
6.6.3.1	<code>derEncBitString</code>	32
6.6.3.2	<code>xe_16BitCharStr</code>	33
6.6.3.3	<code>xe_32BitCharStr</code>	33
6.6.3.4	<code>xe_bigint</code>	34
6.6.3.5	<code>xe_bitstr</code>	34
6.6.3.6	<code>xe_boolean</code>	34
6.6.3.7	<code>xe_charstr</code>	35
6.6.3.8	<code>xe_derCanonicalSort</code>	35
6.6.3.9	<code>xe_derReal10</code>	36
6.6.3.10	<code>xe_enum</code>	36
6.6.3.11	<code>xe_enumUnsigned</code>	36
6.6.3.12	<code>xe_expandBuffer</code>	37
6.6.3.13	<code>xe_free</code>	37
6.6.3.14	<code>xe_getBufLocDescr</code>	37
6.6.3.15	<code>xe_getp</code>	37
6.6.3.16	<code>xe_identifier</code>	38
6.6.3.17	<code>xe_int16</code>	38
6.6.3.18	<code>xe_int64</code>	38
6.6.3.19	<code>xe_int8</code>	39
6.6.3.20	<code>xe_integer</code>	39
6.6.3.21	<code>xe_len</code>	40
6.6.3.22	<code>xe_memcpy</code>	40
6.6.3.23	<code>xe_null</code>	40

6.6.3.24	xe_objid	41
6.6.3.25	xe_octstr	41
6.6.3.26	xe_oid64	41
6.6.3.27	xe_OpenType	42
6.6.3.28	xe_OpenTypeExt	42
6.6.3.29	xe_real	42
6.6.3.30	xe_real10	42
6.6.3.31	xe_reloid	43
6.6.3.32	xe_setp	43
6.6.3.33	xe_tag	43
6.6.3.34	xe_tag_len	44
6.6.3.35	xe_TagAndIndefLen	44
6.6.3.36	xe_uint16	45
6.6.3.37	xe_uint64	45
6.6.3.38	xe_uint8	45
6.6.3.39	xe_unsigned	46
6.7	BER/PER C Utility Functions	47
6.7.1	Detailed Description	47
6.7.2	Define Documentation	48
6.7.2.1	xu_hex_dump	48
6.7.3	Function Documentation	48
6.7.3.1	berDefToIndefLen	48
6.7.3.2	berErrAddTagParm	48
6.7.3.3	berErrUnexpTag	48
6.7.3.4	berGetLibInfo	49
6.7.3.5	berGetLibVersion	49
6.7.3.6	berIndefToDefLen	49
6.7.3.7	berParseTagLen	49
6.7.3.8	berReadMsgFromSocket	50
6.7.3.9	berTagToDynStr	50
6.7.3.10	berTagToString	50
6.7.3.11	xu_alloc_array	51
6.7.3.12	xu_dump	51
6.7.3.13	xu_dump2	51
6.7.3.14	xu_fdump	52
6.7.3.15	xu_RestoreBufferState	52
6.7.3.16	xu_SaveBufferState	52

6.8	Streaming BER Runtime Library Functions	53
6.8.1	Detailed Description	53
6.8.2	Define Documentation	53
6.8.2.1	BS_CHKEND	53
6.8.2.2	BS_CHKEOB	53
6.8.3	Function Documentation	54
6.8.3.1	berStrmFreeContext	54
6.8.3.2	berStrmInitContext	54
6.9	C Streaming BER Encode Functions.	55
6.9.1	Detailed Description	56
6.9.2	Function Documentation	56
6.9.2.1	berEncStrmBigInt	56
6.9.2.2	berEncStrmBigIntNchars	56
6.9.2.3	berEncStrmBitStr	57
6.9.2.4	berEncStrmBMPStr	57
6.9.2.5	berEncStrmBool	57
6.9.2.6	berEncStrmCharStr	58
6.9.2.7	berEncStrmDefLength	58
6.9.2.8	berEncStrmEnum	58
6.9.2.9	berEncStrmEOC	59
6.9.2.10	berEncStrmInt	59
6.9.2.11	berEncStrmInt16	59
6.9.2.12	berEncStrmInt64	60
6.9.2.13	berEncStrmInt8	60
6.9.2.14	berEncStrmLength	60
6.9.2.15	berEncStrmNull	61
6.9.2.16	berEncStrmObjId	61
6.9.2.17	berEncStrmObjId64	61
6.9.2.18	berEncStrmOctStr	62
6.9.2.19	berEncStrmOpenTypeExt	62
6.9.2.20	berEncStrmReal	62
6.9.2.21	berEncStrmReal10	63
6.9.2.22	berEncStrmRelativeOID	63
6.9.2.23	berEncStrmTag	64
6.9.2.24	berEncStrmTagAndIndefLen	64
6.9.2.25	berEncStrmTagAndLen	64
6.9.2.26	berEncStrmUInt	65

6.9.2.27	berEncStrmUInt16	65
6.9.2.28	berEncStrmUInt64	65
6.9.2.29	berEncStrmUInt8	66
6.9.2.30	berEncStrmUnivStr	66
6.9.2.31	berEncStrmWriteOctet	66
6.9.2.32	berEncStrmWriteOctets	67
6.9.2.33	berEncStrmXSDAny	67
6.9.2.34	cerEncStrmBitStr	67
6.9.2.35	cerEncStrmBMPStr	68
6.9.2.36	cerEncStrmCharStr	68
6.9.2.37	cerEncStrmOctStr	68
6.9.2.38	cerEncStrmReal10	69
6.9.2.39	cerEncStrmUnivStr	69
6.10	C Streaming BER Decode Functions.	70
6.10.1	Detailed Description	71
6.10.2	Function Documentation	71
6.10.2.1	berDecStrmBigInt	71
6.10.2.2	berDecStrmBitStr	71
6.10.2.3	berDecStrmBMPStr	72
6.10.2.4	berDecStrmBool	72
6.10.2.5	berDecStrmCharStr	73
6.10.2.6	berDecStrmCheckEnd	73
6.10.2.7	berDecStrmDynBitStr	73
6.10.2.8	berDecStrmDynOctStr	74
6.10.2.9	berDecStrmEnum	74
6.10.2.10	berDecStrmFindTag	75
6.10.2.11	berDecStrmGetTLVLength	75
6.10.2.12	berDecStrmInt	75
6.10.2.13	berDecStrmInt16	76
6.10.2.14	berDecStrmInt64	76
6.10.2.15	berDecStrmInt8	77
6.10.2.16	berDecStrmLength	77
6.10.2.17	berDecStrmMatchEOC	77
6.10.2.18	berDecStrmMatchTag	78
6.10.2.19	berDecStrmNextElement	78
6.10.2.20	berDecStrmNull	78
6.10.2.21	berDecStrmObjId	79

6.10.2.22	berDecStrmObjId64	79
6.10.2.23	berDecStrmOctStr	79
6.10.2.24	berDecStrmOpenType	80
6.10.2.25	berDecStrmOpenTypeAppend	80
6.10.2.26	berDecStrmOpenTypeExt	81
6.10.2.27	berDecStrmPeekTagAndLen	81
6.10.2.28	berDecStrmReadDynTLV	81
6.10.2.29	berDecStrmReadTLV	82
6.10.2.30	berDecStrmReal	82
6.10.2.31	berDecStrmReal10	82
6.10.2.32	berDecStrmRelativeOID	83
6.10.2.33	berDecStrmTag	83
6.10.2.34	berDecStrmTagAndLen	83
6.10.2.35	berDecStrmTestEOC	84
6.10.2.36	berDecStrmTestTag	84
6.10.2.37	berDecStrmUInt	84
6.10.2.38	berDecStrmUInt16	85
6.10.2.39	berDecStrmUInt64	85
6.10.2.40	berDecStrmUInt8	86
6.10.2.41	berDecStrmUnivStr	86
6.11	C++ classes for streaming BER encoding	87
6.11.1	Detailed Description	87
6.12	C++ classes for streaming BER decoding	88
6.12.1	Detailed Description	88
7	Class Documentation	89
7.1	_Asn1BufLocDescr Struct Reference	89
7.1.1	Detailed Description	89
7.2	ASN1BERDecodeBuffer Class Reference	90
7.2.1	Detailed Description	90
7.2.2	Constructor & Destructor Documentation	90
7.2.2.1	ASN1BERDecodeBuffer	90
7.2.2.2	ASN1BERDecodeBuffer	91
7.2.2.3	ASN1BERDecodeBuffer	91
7.2.3	Member Function Documentation	91
7.2.3.1	findElement	91
7.2.3.2	getMsgPtr	92

7.2.3.3	init	92
7.2.3.4	isA	92
7.2.3.5	operator>>	92
7.2.3.6	parseTagLen	92
7.2.3.7	readBinaryFile	93
7.2.3.8	setBuffer	93
7.3	ASN1BERDecodeStream Class Reference	94
7.3.1	Detailed Description	95
7.3.2	Constructor & Destructor Documentation	95
7.3.2.1	ASN1BERDecodeStream	95
7.3.3	Member Function Documentation	95
7.3.3.1	byteIndex	95
7.3.3.2	chkend	96
7.3.3.3	close	96
7.3.3.4	currentPos	96
7.3.3.5	decodeBigInt	96
7.3.3.6	decodeBitStr	97
7.3.3.7	decodeBitStr	97
7.3.3.8	decodeBMPStr	98
7.3.3.9	decodeBool	98
7.3.3.10	decodeCharStr	99
7.3.3.11	decodeEnum	99
7.3.3.12	decodeEoc	100
7.3.3.13	decodeInt	100
7.3.3.14	decodeInt16	101
7.3.3.15	decodeInt64	101
7.3.3.16	decodeInt8	102
7.3.3.17	decodeLength	102
7.3.3.18	decodeNull	102
7.3.3.19	decodeObj	103
7.3.3.20	decodeObjId	103
7.3.3.21	decodeObjId64	104
7.3.3.22	decodeOctStr	104
7.3.3.23	decodeOctStr	105
7.3.3.24	decodeOpenType	105
7.3.3.25	decodeReal	106
7.3.3.26	decodeRelativeOID	106

7.3.3.27	decodeTag	107
7.3.3.28	decodeTagAndLen	107
7.3.3.29	decodeUInt	107
7.3.3.30	decodeUInt16	108
7.3.3.31	decodeUInt64	108
7.3.3.32	decodeUInt8	109
7.3.3.33	decodeUnivStr	109
7.3.3.34	flush	110
7.3.3.35	getAppInfo	110
7.3.3.36	getContext	110
7.3.3.37	getCtxtPtr	110
7.3.3.38	getErrorInfo	110
7.3.3.39	getErrorInfo	111
7.3.3.40	getPosition	111
7.3.3.41	getStatus	111
7.3.3.42	getTLVLength	111
7.3.3.43	isA	112
7.3.3.44	isOpened	112
7.3.3.45	mark	112
7.3.3.46	markSupported	112
7.3.3.47	operator>>	113
7.3.3.48	peekTagAndLen	113
7.3.3.49	printErrorInfo	113
7.3.3.50	read	113
7.3.3.51	readBlocking	114
7.3.3.52	readTLV	114
7.3.3.53	reset	115
7.3.3.54	resetErrorInfo	115
7.3.3.55	setAppInfo	115
7.3.3.56	setDiag	115
7.3.3.57	setPosition	115
7.3.3.58	skip	115
7.4	ASN1BEREncodeBuffer Class Reference	117
7.4.1	Detailed Description	117
7.4.2	Constructor & Destructor Documentation	117
7.4.2.1	ASN1BEREncodeBuffer	117
7.4.2.2	ASN1BEREncodeBuffer	117

7.4.2.3	ASN1BEREncodeBuffer	118
7.4.3	Member Function Documentation	118
7.4.3.1	freeBuffer	118
7.4.3.2	getMsgCopy	118
7.4.3.3	getMsgPtr	118
7.4.3.4	init	118
7.4.3.5	isA	119
7.4.3.6	operator<<	119
7.4.3.7	setBuffer	119
7.5	ASN1BEREncodeStream Class Reference	120
7.5.1	Detailed Description	121
7.5.2	Constructor & Destructor Documentation	121
7.5.2.1	ASN1BEREncodeStream	121
7.5.3	Member Function Documentation	121
7.5.3.1	close	121
7.5.3.2	encodeBigInt	121
7.5.3.3	encodeBigIntNchars	122
7.5.3.4	encodeBitStr	122
7.5.3.5	encodeBitStr	123
7.5.3.6	encodeBMPStr	123
7.5.3.7	encodeBool	124
7.5.3.8	encodeCharStr	124
7.5.3.9	encodeEnum	124
7.5.3.10	encodeEoc	125
7.5.3.11	encodeIndefLen	125
7.5.3.12	encodeInt	126
7.5.3.13	encodeInt16	126
7.5.3.14	encodeInt64	126
7.5.3.15	encodeInt8	127
7.5.3.16	encodeLen	127
7.5.3.17	encodeNull	128
7.5.3.18	encodeObj	128
7.5.3.19	encodeObjId	128
7.5.3.20	encodeObjId64	129
7.5.3.21	encodeOctStr	129
7.5.3.22	encodeOctStr	129
7.5.3.23	encodeReal	130

7.5.3.24	encodeRelativeOID	130
7.5.3.25	encodeTag	131
7.5.3.26	encodeTagAndIndefLen	131
7.5.3.27	encodeTagAndLen	132
7.5.3.28	encodeUInt	132
7.5.3.29	encodeUInt16	132
7.5.3.30	encodeUInt64	133
7.5.3.31	encodeUInt8	133
7.5.3.32	encodeUnivStr	134
7.5.3.33	flush	134
7.5.3.34	getAppInfo	134
7.5.3.35	getContext	134
7.5.3.36	getCtxtPtr	135
7.5.3.37	getErrorInfo	135
7.5.3.38	getErrorInfo	135
7.5.3.39	getStatus	135
7.5.3.40	isA	136
7.5.3.41	isOpened	136
7.5.3.42	operator<<	136
7.5.3.43	printErrorInfo	136
7.5.3.44	resetErrorInfo	136
7.5.3.45	setAppInfo	136
7.5.3.46	setDiag	137
7.5.3.47	write	137
7.6	ASN1BERMessageBuffer Class Reference	138
7.6.1	Detailed Description	138
7.6.2	Constructor & Destructor Documentation	138
7.6.2.1	ASN1BERMessageBuffer	138
7.6.2.2	ASN1BERMessageBuffer	138
7.6.3	Member Function Documentation	139
7.6.3.1	binDump	139
7.6.3.2	calcIndefLen	139
7.6.3.3	hexDump	139
8	File Documentation	140
8.1	asn1ber.h File Reference	140
8.1.1	Detailed Description	143

8.2	asn1BerCppType.h File Reference	144
8.2.1	Detailed Description	144
8.3	ASN1BERDecodeStream.h File Reference	145
8.3.1	Detailed Description	145
8.4	ASN1BEREncodeStream.h File Reference	146
8.4.1	Detailed Description	146
8.5	asn1berSocket.h File Reference	147
8.5.1	Detailed Description	147
8.6	asn1berStream.h File Reference	148
8.6.1	Detailed Description	150

Chapter 1

ASN1C BER/DER Runtime Classes and Library Functions

The **ASN.1 C++ Runtime Classes** are wrapper classes that provide an object-oriented interface to the ASN.1 C runtime library functions. The classes described in this manual are derived from the common classes documented in the ASN1C C/C++ Common Runtime manual. They are specific to the Basic Encoding Rules (BER) and Distinguished Encoding Rules (DER) as defined in the ITU-T X.690 standard.

These BER/DER specific C++ runtime classes include:

- classes for streaming BER/DER decoding
- classes for streaming BER/DER encoding.

The **ASN.1 BER Runtime Library** contains all of the low-level constants, types, and functions that are assembled by the compiler to encode/decode more complex structures.

This library consists of the following two items:

- A global include file ("asn1ber.h") that is compiled into all generated source files.
- An object library of functions that are linked with the C functions after compilation with a C compiler.

In general, programmers will not need to be too concerned with the details of these functions. The ASN.1 compiler generates calls to them in the C or C++ source files that it creates. However, the functions in the library may also be called on their own in applications requiring their specific functionality.

Chapter 2

Module Index

2.1 Modules

Here is a list of all modules:

BER/DER/CER C++ Run-Time Classes.	6
BER Message Buffer Classes	7
C++ classes for streaming BER encoding.	87
C++ classes for streaming BER decoding.	88
BER Runtime Library Functions.	8
BER/DER C Decode Functions.	9
BER/DER C File Functions.	28
BER/DER C Encode Functions.	31
BER/PER C Utility Functions	47
Streaming BER Runtime Library Functions.	53
C Streaming BER Encode Functions.	55
C Streaming BER Decode Functions.	70

Chapter 3

Class Index

3.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

<code>_Asn1BufLocDescr</code>	89
<code>ASN1BERDecodeStream</code>	94
<code>ASN1BEREncodeStream</code>	120
<code>ASN1BERMessageBuffer</code>	138
<code>ASN1BERDecodeBuffer</code>	90
<code>ASN1BEREncodeBuffer</code>	117

Chapter 4

Class Index

4.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

_Asn1BufLocDescr	89
ASN1BERDecodeBuffer	90
ASN1BERDecodeStream	94
ASN1BEREncodeBuffer	117
ASN1BEREncodeStream	120
ASN1BERMessageBuffer	138

Chapter 5

File Index

5.1 File List

Here is a list of all documented files with brief descriptions:

asn1ber.h	140
asn1BerCppTypes.h	144
ASN1BERDecodeStream.h	145
ASN1BEREncodeStream.h	146
asn1berSocket.h	147
asn1berStream.h	148

Chapter 6

Module Documentation

6.1 BER/DER/CER C++ Run-Time Classes.

Modules

- [BER Message Buffer Classes](#)
- [C++ classes for streaming BER encoding.](#)
- [C++ classes for streaming BER decoding.](#)

6.2 BER Message Buffer Classes

Classes

- class [ASN1BERMessageBuffer](#)
- class [ASN1BEREncodeBuffer](#)
- class [ASN1BERDecodeBuffer](#)

6.2.1 Detailed Description

These classes manage the buffers for encoding and decoding ASN.1 BER/DER messages.

6.3 BER Runtime Library Functions.

Classes

- [struct _Asn1BufLocDescr](#)

Modules

- [BER/DER C Decode Functions.](#)
- [BER/DER C File Functions.](#)
- [BER/DER C Encode Functions.](#)
- [BER/PER C Utility Functions](#)
- [Streaming BER Runtime Library Functions.](#)

Typedefs

- [typedef struct _Asn1BufLocDescr Asn1BufLocDescr](#)

6.3.1 Detailed Description

The ASN.1 Basic Encoding Rules (BER) Runtime Library contains the low-level constants, types, and functions that are assembled by the compiler to encode/decode more complex structures.

6.3.2 Typedef Documentation

6.3.2.1 `typedef struct _Asn1BufLocDescr Asn1BufLocDescr`

Buffer location descriptor

6.4 BER/DER C Decode Functions.

Defines

- #define `xd_utf8str`(pctxt, object_p, tagging, length) `xd_charstr` (pctxt, (const char**)object_p, tagging, ASN_ID_UTF8String, length)
- #define `xd_indeflen`(m) `xd_indeflen_ex`(m, INT_MAX)

Functions

- int `xd_tag` (OSCTXT *pctxt, ASN1TAG *tag_p)
- int `xd_tag_len` (OSCTXT *pctxt, ASN1TAG *tag_p, int *len_p, OSOCTET flags)
- int `xd_match` (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSOCTET flags)
- int `xd_boolean` (OSCTXT *pctxt, OSBOOL *object_p, ASN1TagType tagging, int length)
- int `xd_integer` (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging, int length)
- int `xd_int8` (OSCTXT *pctxt, OSINT8 *object_p, ASN1TagType tagging, int length)
- int `xd_int16` (OSCTXT *pctxt, OSINT16 *object_p, ASN1TagType tagging, int length)
- int `xd_unsigned` (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging, int length)
- int `xd_uint8` (OSCTXT *pctxt, OSUINT8 *object_p, ASN1TagType tagging, int length)
- int `xd_uint16` (OSCTXT *pctxt, OSUINT16 *object_p, ASN1TagType tagging, int length)
- int `xd_int64` (OSCTXT *pctxt, OSINT64 *object_p, ASN1TagType tagging, int length)
- int `xd_uint64` (OSCTXT *pctxt, OSUINT64 *object_p, ASN1TagType tagging, int length)
- int `xd_bigint` (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, int length)
- int `xd_bitstr_s` (OSCTXT *pctxt, OSOCTET *object_p, OSUINT32 *numbits_p, ASN1TagType tagging, int length)
- int `xd_bitstr` (OSCTXT *pctxt, const OSOCTET **object_p2, OSUINT32 *numbits_p, ASN1TagType tagging, int length)
- int `xd_octstr_s` (OSCTXT *pctxt, OSOCTET *object_p, OSUINT32 *pnumocts, ASN1TagType tagging, int length)
- int `xd_octstr` (OSCTXT *pctxt, const OSOCTET **object_p2, OSUINT32 *pnumocts, ASN1TagType tagging, int length)
- int `xd_charstr` (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, ASN1TAG tag, int length)
- int `berDecCharArray` (OSCTXT *pctxt, char *charArray, OSSIZE arraySize, ASN1TagType tagging, ASN1TAG tag, int length)
- int `xd_16BitCharStr` (OSCTXT *pctxt, Asn116BitCharString *object_p, ASN1TagType tagging, ASN1TAG tag, int length)
- int `xd_32BitCharStr` (OSCTXT *pctxt, Asn132BitCharString *object_p, ASN1TagType tagging, ASN1TAG tag, int length)
- int `xd_null` (OSCTXT *pctxt, ASN1TagType tagging)
- int `xd_objid` (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging, int length)
- int `xd_oid64` (OSCTXT *pctxt, ASN1OID64 *object_p, ASN1TagType tagging, int length)
- int `xd_reloid` (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging, int length)
- int `xd_real` (OSCTXT *pctxt, OSREAL *object_p, ASN1TagType tagging, int length)
- int `xd_enum` (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging, int length)
- int `xd_enumUnsigned` (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging, int length)
- int `xd_OpenType` (OSCTXT *pctxt, const OSOCTET **object_p2, OSUINT32 *pnumocts)
- int `xd_OpenTypeExt` (OSCTXT *pctxt, ASN1CCB *ccb_p, ASN1TAG *tags, int tagCount, OSRTDList *pElemList)
- int `xd_OpenTypeAppend` (OSCTXT *pctxt, OSRTDList *pElemList)
- int `xd_real10` (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, int length)

- int `xd_setp` (OSCTXT *pctxt, const OSOCTET *msg_p, int msglen, ASN1TAG *tag_p, int *len_p)
- int `xd_indeflen_ex` (const OSOCTET *msg_p, int bufSize)
- int `xd_len` (OSCTXT *pctxt, int *len_p)
- int `xd_chkend` (OSCTXT *pctxt, ASN1CCB *ccb_p)
- int `xd_count` (OSCTXT *pctxt, int length, int *count_p)
- int `xd_NextElement` (OSCTXT *pctxt)
- int `xd_Tag1AndLen` (OSCTXT *pctxt, OSINT32 *len_p)
- int `xd_memcpy` (OSCTXT *pctxt, OSOCTET *object_p, int length)
- int `xd_match1` (OSCTXT *pctxt, OSOCTET tag, int *len_p)

6.4.1 Detailed Description

BER/DER C decode functions handle the decoding of the primitive ASN.1 data types and ASN.1 length and tag fields within a message. Calls to these functions are assembled in the C source code generated by the ASN1C compiler to decode complex ASN.1 structures. These functions are also directly callable from within a user's application program if the need to decode a primitive data item exists.

The procedure to decode a primitive data item is as follows:

1. Call the `xd_setp` low-level decode function to specify the address of the buffer containing the encoded ASN.1 data to be decoded.
2. Call the specific decode function to decode the value. The tag value obtained in the first step can be used to determine which decode function to call for decoding the variable.

6.4.2 Define Documentation

6.4.2.1 `#define xd_utf8str(pctxt, object_p, tagging, length) xd_charstr(pctxt, (const char**)object_p, tagging, ASN_ID_UTF8String, length)`

This function is used to decode a variable of the ASN.1 UTF-8 string type. This function allocates memory for the decoded string and returns a pointer to the data.

Parameters

pctxt Pointer to ASN.1 context block structure

object_p Pointer to a pointer to receive the address of the allocated memory into which the decoded character string data will be stored. The string is assumed to be a normal C string containing non-null characters. A null terminator is automatically added to the end of the string by this function.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3 Function Documentation

6.4.3.1 `int berDecCharArray (OSCTXT * pctxt, char * charArray, OSSIZE arraySize, ASN1TagType tagging, ASN1TAG tag, int length)`

This function is the base function for decoding any of the 8-bit character string useful types such as IA5String, VisibleString, etc. This function decodes the character string into a static array variable.

Parameters

pctxt Pointer to ASN.1 context block structure

charArray Static character array variable (char[]) large enough to hold decoded data plus a null-termination byte. If the array is not large enough, an RTERR_TOOBIG error status will be returned.

arraySize Size (in bytes) of the charArray variable.

tagging Specifies whether element is implicitly or explicitly tagged.

tag Tag variable to match

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.2 `int xd_16BitCharStr (OSCTXT * pctxt, Asn116BitCharString * object_p, ASN1TagType tagging, ASN1TAG tag, int length)`

This function is the base function for decoding a 16-bit character string useful type. In the current version of ASN.1, the only string type based on 16-bit Unicode characters is the UniCharString type. This function allocates memory for the decoded string and returns a pointer to the data.

Parameters

pctxt Pointer to ASN.1 context block structure

object_p Pointer to a pointer to receive the address of the allocated memory into which the decoded character string data will be stored. The string is assumed to contain all non-null 16-bit unicode characters. A null terminator is automatically added to the end of the string by this function.

tagging Specifies whether element is implicitly or explicitly tagged.

tag Tag variable to match

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.3 **int xd_32BitCharStr (OSCTXT * *pctxt*, Asn132BitCharString * *object_p*, ASN1TagType *tagging*, ASN1TAG *tag*, int *length*)**

This function is the base function for decoding a 32-bit character string useful type. In the current version of ASN.1, the only string type based on 32-bit characters is the 32BitCharString type. This function allocates memory for the decoded string and returns a pointer to the data.

Parameters

pctxt Pointer to ASN.1 context block structure

object_p Pointer to a pointer to receive the address of the allocated memory into which the decoded character string data will be stored. The string is assumed to contain all non-null 32-bit unicode characters. A null terminator is automatically added to the end of the string by this function.

tagging Specifies whether element is implicitly or explicitly tagged.

tag Tag variable to match.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.4 **int xd_bigint (OSCTXT * *pctxt*, const char ** *object_p*, ASN1TagType *tagging*, int *length*)**

This function parses an ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

This function will decode a variable of the ASN.1 INTEGER type. In this case, the integer is assumed to be of a larger size than can fit in a C or C++ long type (normally 32 or 64 bits). For example, parameters used to calculate security values are typically larger than these sizes. These variables are stored in character string constant variables. They are represented as hexadecimal strings with prefix '0x'. A leading zero is also added to positive values where the leading digit would otherwise be greater than 8 (i.e. representing a negative value in two's complement). If it is necessary to convert a hexadecimal string to another radix, then use rtxBigIntSetStr / rtxBigIntToString functions.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Pointer to a character pointer variable to receive the decoded hexadecimal value. Dynamic memory is allocated for the variable using the rtxMemAlloc function. The decoded variable is represented as a hexadecimal string with prefix '0x'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.5 `int xd_bitstr (OSCTXT * pctxt, const OSOCTET ** object_p2, OSUINT32 * numbits_p, ASN1TagType tagging, int length)`

This function decodes a variable of the ASN.1 BIT STRING. This function will allocate dynamic memory to store the decoded result.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length The length, in OCTETs, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

numbits_p Pointer to an integer value to receive the decoded number of bits.

object_p2 Pointer to a pointer variable to receive the decoded bit string. Dynamic memory is allocated to hold the string. Pointer to a variable to receive the decoded bit string.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.6 `int xd_bitstr_s (OSCTXT * pctxt, OSOCTET * object_p, OSUINT32 * numbits_p, ASN1TagType tagging, int length)`

This function decodes a variable of the ASN.1 BIT STRING type into a static memory structure. This function call is generated by ASN1C to decode a sized bit string production.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length The length, in OCTETs, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

numbits_p Pointer to an integer variable containing the size (in bits) of the sized ASN.1 bit string. An error will occur if the number of bits in the decoded string is larger than this value. Note that this is also used as an output variable - the actual number of decoded bits will be returned in this variable.

object_p Pointer to a variable to receive the decoded bit string. This is assumed to be a static array large enough to hold the number of bits specified in the **numbits_p* input parameter.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.7 **int xd_boolean** (OSCTXT * *pctxt*, OSBOOL * *object_p*, ASN1TagType *tagging*, int *length*)

This function parses an ASN.1 BOOLEAN tag/length/value at the current message pointer location and advances the pointer to the next field.

The function first checks to see if explicit tagging is specified. If yes, the universal tag for this message type is checked to make sure it is of the expected value. If the match is not successful, a negative value is returned to indicate the parse was not successful. Otherwise, the pointer is advanced to the length field and the length parsed.

The length value is then check to see if it is equal to one which is the only valid length for boolean. If it is equal, the boolean data value is parsed; otherwise, and error is returned.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Decoded boolean data value.

Returns

Completion status of operation:

- 0 (0) = success,
- RTERR_INVLEN invalid length (!= 1)
- RTERR_IDNOTFOU unexpected tag value (not UNIV 1)

6.4.3.8 **int xd_charstr** (OSCTXT * *pctxt*, const char ** *object_p*, ASN1TagType *tagging*, ASN1TAG *tag*, int *length*)

This function is the base function for decoding any of the 8-bit character string useful types such as IA5String, VisibleString, etc. This function allocates memory for the decoded string and returns a pointer to the data.

Parameters

pctxt Pointer to ASN.1 context block structure

object_p Pointer to a pointer to receive the address of the allocated memory into which the decoded character string data will be stored. The string is assumed to be a normal C string containing non-null characters. A null terminator is automatically added to the end of the string by this function.

tagging Specifies whether element is implicitly or explicitly tagged.

tag Tag variable to match

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.9 int xd_chkend (OSCTXT * *pctxt*, ASN1CCB * *ccb_p*)

This function checks for the end of a constructed element. It is typically used by the ASN1C compiler to set up a loop for decoding a constructed type such as a SEQUENCE or SET.

Parameters

pctxt Pointer to context block structure.

ccb_p Pointer to a context control block (ccb). This is a structure added to compiler generated code to keep track of the current position within nested structures.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.10 int xd_count (OSCTXT * *pctxt*, int *length*, int * *count_p*)

This function determines the count of elements within a constructed type.

Parameters

pctxt Pointer to context block structure.

length Length of the constructed type.

count_p Pointer to an integer variable to receive the element count.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.11 int xd_enum (OSCTXT * *pctxt*, OSINT32 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a value of the ASN.1 ENUMERATED type. This function is identical to the integer decode function (xd_integer) except that the enumerated universal tag value is validated.

Parameters

pctxt Pointer to context block structure.

object_p Pointer to value to receive decoded result.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.12 `int xd_enumUnsigned (OSCTXT * pctxt, OSUINT32 * object_p, ASN1TagType tagging, int length)`

This function decodes a value of the ASN.1 ENUMERATED type. This function is identical to the integer decode function (`xd_integer`) except that the enumerated universal tag value is validated.

Parameters

- pctxt* Pointer to context block structure.
- object_p* Pointer to value to receive decoded result.
- tagging* Specifies whether element is implicitly or explicitly tagged.
- length* Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.13 `int xd_indeflen_ex (const OSOCTET * msg_p, int bufSize)`

This function calculates the actual length of an indefinite length message component.

Parameters

- msg_p* Pointer to an indefinite length message component.
- bufSize* Size of the message's buffer

Referenced by `ASN1BERMessageBuffer::calcIndefLen()`.

6.4.3.14 `int xd_int16 (OSCTXT * pctxt, OSINT16 * object_p, ASN1TagType tagging, int length)`

This function parses an ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

This function is similar to `xd_integer` but it is used to parse 16-bit integer values.

Parameters

- pctxt* Pointer to context block structure.
- tagging* Specifies whether element is implicitly or explicitly tagged.
- length* Length of data to retrieve. Valid for implicit case only.
- object_p* Pointer to decoded 16-bit integer value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.15 `int xd_int64 (OSCTXT * pctxt, OSINT64 * object_p, ASN1TagType tagging, int length)`

This function parses an ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

The function is similar to [xd_integer](#) but it can be used to parse integer values with sizes up to 64 bits (if platform supports such integer's size).

If the match is successful or implicit tagging is specified, the integer data value is parsed.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Pointer to decoded 64-bit integer value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.16 `int xd_int8 (OSCTXT * pctxt, OSINT8 * object_p, ASN1TagType tagging, int length)`

This function parses an ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

This function is similar to [xd_integer](#) but it is used to parse 8-bit integer values.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Pointer to decoded 8-bit integer value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.17 `int xd_integer (OSCTXT * pctxt, OSINT32 * object_p, ASN1TagType tagging, int length)`

This function parses an ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

The function first checks to see if explicit tagging is specified. If yes, the universal tag value is parsed and checked to make sure it matches the expected tag for this message type. If not, a negative value is returned to indicate the parse was not successful. Otherwise, the length value is parsed.

If the match is successful or implicit tagging is specified, the integer data value is parsed.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Pointer to decoded integer value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.18 int xd_len (OSCTXT * pctxt, int * len_p)

This function decodes an ASN.1 length value.

Parameters

pctxt Pointer to context block structure.

len_p Pointer to integer variable to receive the the decoded length value. If the length is indefinite, the constant ASN_K_INDEFLEN is returned.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.19 int xd_match (OSCTXT * pctxt, ASN1TAG tag, int * len_p, OSOCTET flags)

This function compares the tag at the current message pointer position with the given tag for a match. If a match occurs, the length field is decoded and the length is returned to the caller. If the input parameter 'advance' is set to TRUE, the message pointer is advanced to the beginning of the contents field.

If a match does not occur, the routine will skip to subsequent fields in search of a match. If a match is eventually found, the processing described above is done; otherwise, a not found status is returned to the caller.

Parameters

pctxt Pointer to context block structure.

tag Tag variable to match.

len_p Length of message component. Returned as follows: >= 0 component is fixed length ASN_K_INDEFLEN component is indefinite length

flags Bit flags used to set the following options:

- XM_ADVANCE: Advance decode pointer on match.
- XM_SEEK : Seek until match found or EOM.
- XM_SKIP : Skip to next tag before search

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.20 `int xd_match1 (OSCTXT * pctxt, OSOCTET tag, int * len_p)`

The `xd_match1` function does a comparison between the given tag and the tag at the current decode pointer position to determine if they match. It then returns the result of the match operation. In contrast to `xd_match` function `xd_match1` is an optimized version and can be used only to compare primitive tags (with number less than 31). It is always advance the decode pointer to the contents field if matching is successful. Note, that the tag should be specified as an octet, like it is used in BER encoding.

Parameters

pctxt Pointer to context block structure.

tag Tag variable to match in octet format.

len_p Length of message component. Returned as follows: ≥ 0 component is fixed length ASN_K_INDEFLEN component is indefinite length

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.21 `int xd_memcpy (OSCTXT * pctxt, OSOCTET * object_p, int length)`

This function copies data from the contents field of a message component into the target object.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

**object_p* A pointer to a memory structure to receive the copied data.

length The number of bytes to copy from the contents field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.22 `int xd_NextElement (OSCTXT * pctxt)`

This function skips to the next element in the decode buffer.

Parameters

pctxt Pointer to context block structure.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.23 `int xd_null (OSCTXT * pctxt, ASN1TagType tagging)`

This function decoded the ASN.1 NULL placeholder type. The null data type contains no data; however, if explicit tagging is specified, it will contain a universal tag value (5) and zero length. This function will parse those values.

Parameters

pctxt Pointer to ASN.1 context block structure

tagging Specifies whether element is implicitly or explicitly tagged. The function will do nothing if implicit tagging is specified.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.24 `int xd_objid (OSCTXT * pctxt, ASN1OBJID * object_p, ASN1TagType tagging, int length)`

This function decodes a value of the ASN.1 object identifier type.

Parameters

pctxt Pointer to context block structure.

object_p Pointer to value to receive decoded result. The ASN1OBJID structure contains an integer to hold the number of subidentifiers and an array to hold the subidentifier values.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.25 `int xd_octstr (OSCTXT * pctxt, const OSOCTET ** object_p2, OSUINT32 * pnumocts, ASN1TagType tagging, int length)`

This function decodes the octet string at the current message pointer location and returns its value. This version of the function allocates memory for the decoded string and returns a pointer to the data.

Parameters

pctxt Pointer to ASN.1 context block structure

object_p2 Pointer to a pointer to receive the address of the allocated memory into which the decoded data will be stored.

pnumocts Pointer to an integer variable to receive length of the decoded octet string.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.26 `int xd_octstr_s (OSCTXT * pctxt, OSOCTET * object_p, OSUINT32 * pnumocts, ASN1TagType tagging, int length)`

This function decodes the octet string at the current message pointer location and returns its value. The value is returned in the buffer pointed to by the given character buffer pointer. This is a static buffer that must be large enough to hold the decoded data.

Parameters

pctxt Pointer to ASN.1 context block structure

object_p Pointer to static octet array to receive decoded data

pnumocts Pointer to an integer variable to receive the length of the decoded octet string. On input, this parameter is used to specify the size of the octet array.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.27 `int xd_oid64 (OSCTXT * pctxt, ASN1OID64 * object_p, ASN1TagType tagging, int length)`

This function decodes a value of the ASN.1 object identifier type using 64-bit subidentifiers.

Parameters

pctxt Pointer to context block structure.

object_p Pointer to value to receive decoded result. The ASN1OID64 structure contains an integer to hold the number of subidentifiers and an array of 64-bit unsigned integers to hold the subidentifier values.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.28 `int xd_OpenType (OSCTXT * pctxt, const OSOCTET ** object_p2, OSUINT32 * pnumocts)`

This function decodes a value of an ASN.1 open type. An open type is used to model the old ASN.1 ANY and ANY DEFINED BY types. It is also used to model variable type references within information objects (for example, TYPE-IDENTIFIER.&Type). Dynamic memory is allocated to hold the decoded result.

Parameters

pctxt Pointer to context block structure.

object_p2 Pointer to value to receive decoded result.

pnumocts Pointer to an integer variable to receive length of the decoded octet string.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.29 `int xd_OpenTypeAppend (OSCTXT * pctxt, OSRTDList * pElemList)`

This function appends a decoded open type element onto a list of elements. It is used by the ASN1C compiler to decode messages with multiple extension fields following an extension marker (...).

Parameters

pctxt Pointer to context block structure.

pElemList Pointer to element list onto which the decoded element should be appended.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.30 `int xd_OpenTypeExt (OSCTXT * pctxt, ASN1CCB * ccb_p, ASN1TAG * tags, int tagCount, OSRTDList * pElemList)`

This function decodes an ASN.1 open type extension. This is the optional data that follows the ... in multi-version messages. Dynamic memory is allocated to hold the decoded result.

Parameters

pctxt Pointer to context block structure.

ccb_p Pointer to a 'context control block' structure. This is basically a loop control mechanism to keep the variable associated with parsing a nested constructed element straight.

tags Array of next expected tag values (null if last field). The routine will loop through elements until a matching tag is found or some other error occurs.

tagCount The number of tags in the tags array.

pElemList The pointer to linked list structure. The list will contain elements of ASN1OpenType type.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.31 `int xd_real (OSCTXT * pctxt, OSREAL * object_p, ASN1TagType tagging, int length)`

This function decodes a value of the binary encoded ASN.1 REAL type.

Parameters

pctxt Pointer to context block structure.

object_p Pointer to value to receive decoded result. The OSREAL data type is a double-precision floating point number type (C double type).

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.32 `int xd_real10 (OSCTXT * pctxt, const char ** object_p, ASN1TagType tagging, int length)`

This function decodes a value of the decimal encoded ASN.1 REAL type.

Parameters

pctxt Pointer to context block structure.

object_p Pointer to a character pointer variable to receive the decoded result. Dynamic memory is allocated for the variable using the `rtxMemAlloc` function.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.33 `int xd_reloid (OSCTXT * pctxt, ASN1OBJID * object_p, ASN1TagType tagging, int length)`

This function decodes a value of the ASN.1 RELATIVE-OID type.

Parameters

pctxt Pointer to context block structure.

object_p Pointer to value to receive decoded result. The ASN1OBJID structure contains an integer to hold the number of subidentifiers and an array to hold the subidentifier values.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.34 int xd_setp (OSCTXT * *pctxt*, const OSOCTET * *msg_p*, int *msglen*, ASN1TAG * *tag_p*, int * *len_p*)

This function sets the decode pointer (cursor) to point at the beginning of the encoded ASN.1 message that is to be decoded. This function must be called prior to calling any of the other decode functions.

Parameters

pctxt Pointer to context block structure.

msg_p Pointer to message buffer containing data to be decoded.

msglen Size of the message data buffer. This is an optional parameter. It is used to verify that the length of the data encoded in the message is less than or equal to the given size of the message buffer. If the message size is unknown at the time of decoding, this argument can be set to zero and the size check will be bypassed.

tag_p Pointer to an ASN.1 tag variable to receive the value of the initial tag parsed from a message. This is an optional parameter. It can be set to NULL if the user does not require the initial tag value.

len_p Pointer to an integer variable to receive the decoded message length. Note that this is the total length of the message from the start of message, NOT the actual length decoded after the initial tag. In other words the length of the initial tag and length are added on to the parsed length. This is an optional parameter. It can be set to NULL if the user does not require the message length value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

Referenced by ASN1BERDecodeBuffer::parseTagLen().

6.4.3.35 int xd_tag (OSCTXT * *pctxt*, ASN1TAG * *tag_p*)

This function decodes an ASN.1 tag into a standard 32-bit unsigned integer type. The bits used to represent the components of a tag are as follows:

Bit Fields:

- 31-30 Class (00 = UNIV, 01 = APPL, 10 = CTXT, 11 = PRIV)
- 29 Form (0 = primitive, 1 = constructed)
- 28-0 ID code value

Parameters

pctxt Pointer to context block structure.

tag_p Pointer to variable to receive decoded tag info.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.4.3.36 int xd_Tag1AndLen (OSCTXT * *pctxt*, OSINT32 * *len_p*)

This function is an optimized version of the `xd_tag_len` function. If the ASN1C compiler determines the tag at a given location to be parsed is only one byte long (a typical case) then it will use this function. It reads a single tag byte and then immediately parses the length field.

Parameters

pctxt Pointer to context block structure.

len_p Length of message component. Returned as follows: ≥ 0 component is fixed length ASN_K_INDEFLEN component is indefinite length

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.37 int xd_tag_len (OSCTXT * *pctxt*, ASN1TAG * *tag_p*, int * *len_p*, OSOCTET *flags*)

This function parses the ASN.1 tag and length fields located at the current message pointer position.

`xd_tag_len` monitors indefinite length messages as follows: Each time a length is parsed, it is checked to see if it is an indefinite length value. If it is, an indefinite length section counter is incremented. Each time an end-of-contents (EOC) identifier is parsed, this counter is decremented. When the counter goes to zero, end of message is signaled.

Parameters

pctxt Pointer to context block structure.

tag_p Pointer to variable to receive decoded tag info.

len_p Length of message component. Returned as follows: ≥ 0 component is fixed length ASN_K_INDEFLEN component is indefinite length

flags Bit flags used to set the following options: XM_ADVANCE: Advance decode pointer on match.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.4.3.38 `int xd_uint16 (OSCTXT * pctxt, OSUINT16 * object_p, ASN1TagType tagging, int length)`

This function parses an unsigned variant of ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

This function is similar to [xd_unsigned](#) but it is used to parse 16-bit unsigned integer values.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Pointer to decoded 16-bit unsigned integer value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.39 `int xd_uint64 (OSCTXT * pctxt, OSUINT64 * object_p, ASN1TagType tagging, int length)`

This function parses an unsigned variant of ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

The function is similar to [xd_unsigned](#) but it can be used to parse integer values with sizes up to 64 bits (if platform supports such integer's size).

If the match is successful or implicit tagging is specified, the integer data value is parsed.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Pointer to decoded 64-bit unsigned integer value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.40 `int xd_uint8 (OSCTXT * pctxt, OSUINT8 * object_p, ASN1TagType tagging, int length)`

This function parses an unsigned variant of ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

This function is similar to [xd_unsigned](#) but it is used to parse 8-bit unsigned integer values.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Pointer to decoded 8-bit unsigned integer value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.4.3.41 `int xd_unsigned (OSCTXT * pctxt, OSUINT32 * object_p, ASN1TagType tagging, int length)`

This function parses an unsigned variant of ASN.1 INTEGER tag/length/value at the current message pointer location and advances the pointer to the next field.

The function first checks to see if explicit tagging is specified. If yes, the universal tag value is parsed and checked to make sure it matches the expected tag for this message type. If not, a negative value is returned to indicate the parse was not successful. Otherwise, the length value is parsed.

If the match is successful or implicit tagging is specified, the integer data value is parsed.

Parameters

pctxt Pointer to context block structure.

tagging Specifies whether element is implicitly or explicitly tagged.

length Length of data to retrieve. Valid for implicit case only.

object_p Pointer to decoded unsigned integer value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.5 BER/DER C File Functions.

Functions

- `int xdf_tag` (FILE *fp, ASN1TAG *ptag, OSOCTET *buffer, int *pbufidx)
- `int xdf_len` (FILE *fp, OSINT32 *plen, OSOCTET *buffer, int *pbufidx)
- `int xdf_TagAndLen` (FILE *fp, ASN1TAG *ptag, OSINT32 *plen, OSOCTET *buffer, int *pbufidx)
- `int xdf_ReadPastEOC` (FILE *fp, OSOCTET *buffer, int bufsiz, int *pbufidx)
- `int xdf_ReadContents` (FILE *fp, int len, OSOCTET *buffer, int bufsiz, int *pbufidx)

6.5.1 Detailed Description

The BER/DER file decode functions allow decode operations to be performed directly on encoded entities within a binary file as opposed to in memory. This makes it possible to parse tag and length variables to determine when pieces of a message can be read into memory. The "tap3batch" sample program provides a good illustration of how these functions are used. They can be applied to a TAP3 batch file to get at the call-detail records for sequential processing without having to read the entire file into memory.

These functions all begin with the prefix "xdf_" to distinguish them from the other decode functions. The following is a description of the various functions that make up this package.

6.5.2 Function Documentation

6.5.2.1 `int xdf_len` (FILE *fp, OSINT32 *plen, OSOCTET *buffer, int *pbufidx)

This function decodes the ASN.1 length from a file stream.

Parameters

fp The file pointer of the binary file to be decoded. It is expected that the current file position is at the first byte of the tag to be decoded.

plen A pointer to an integer to receive the decoded length value.

buffer The buffer to receive the parsed data.

pbufidx The pointer to the current buffer index containing offset to the location where the decoded bytes should be copied in the output buffer. The updated buffer index set to point at the first free byte after the tag is parsed and copied into the buffer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.5.2.2 `int xdf_ReadContents` (FILE *fp, int len, OSOCTET *buffer, int bufsiz, int *pbufidx)

This routine reads the contents of a BER tag-length-value (TLV) into the given buffer. The TLV can be of indefinite length.

Parameters

fp A file pointer of a binary file to be decoded. It is expected that the current file position is the first byte following an indefinite length marker (0x80 byte).

len The length of data to be read from the file. This can be the indefinite constant (ASN_K_INDEFLEN) indicating all data up to the corresponding end-of-context (EOC) marker should be read.

buffer The buffer to receive the parsed data.

bufsiz The size of the buffer to receive the parsed data.

pbuflidx The pointer to the current buffer index containing offset to the location where the decoded bytes should be copied in the output buffer. The updated buffer index set to point at the first free byte index after the parsed data is copied to the buffer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.5.2.3 int xdf_ReadPastEOC (FILE *fp, OSOCTET *buffer, int bufsiz, int *pbuflidx)

This function consumes bytes from the file stream until a matching end-of-context (EOC) maker is found. The bytes read from the file are stored in the given buffer for later processing. An indefinite marker is assumed to have been parsed prior to calling this function.

Parameters

fp A file pointer of a binary file to be decoded. It is expected that the current file position is the first byte following an indefinite length marker (0x80 byte).

buffer The buffer to receive the parsed data.

bufsiz The size of the buffer to receive the parsed data.

pbuflidx The pointer to the current buffer index containing offset to the location where the decoded bytes should be copied in the output buffer. The updated buffer index set to point at the first free byte index after the parsed data is copied to the buffer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.5.2.4 int xdf_tag (FILE *fp, ASN1TAG *ptag, OSOCTET *buffer, int *pbuflidx)

This function decodes ASN.1 tag from a file stream into a standard 32-bit ASN.1 tag structure.

Parameters

fp The file pointer of the binary file to be decoded. It is expected that the current file position is at the first byte of the tag to be decoded.

ptag A pointer to an ASN.1 tag structure to receive the decoded tag.

buffer The buffer to receive the parsed data.

pbuflidx The pointer to the current buffer index containing offset to the location where the decoded bytes should be copied in the output buffer. The updated buffer index set to point at the first free byte after the tag is parsed and copied into the buffer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.5.2.5 int xdf_TagAndLen (FILE * *fp*, ASN1TAG * *ptag*, OSINT32 * *plen*, OSOCTET * *buffer*, int * *pbufix*)

This function decodes an ASN.1 tag and length pair from a file stream.

Parameters

fp The file pointer of the binary file to be decoded. It is expected that the current file position is at the first byte of the tag to be decoded.

ptag A pointer to an ASN1TAG variable to receive parsed the tag value.

plen A pointer to an integer to receive the decoded length value.

buffer The buffer to receive the parsed data.

pbufix The pointer to the current buffer index containing offset to the location where the decoded bytes should be copied in the output buffer. The updated buffer index set to point at the first free byte after the tag is parsed and copied into the buffer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.6 BER/DER C Encode Functions.

Defines

- #define [xe_utf8str](#)(pctxt, object_p, tagging) xe_charstr (pctxt, (const char*)object_p, tagging, ASN_ID_UTF8String)

Functions

- int [xe_identifier](#) (OSCTXT *pctxt, OSUINT32 ident)
- int [xe_tag](#) (OSCTXT *pctxt, ASN1TAG tag)
- int [xe_tag_len](#) (OSCTXT *pctxt, ASN1TAG tag, int length)
- int [xe_boolean](#) (OSCTXT *pctxt, OSBOOL *object_p, ASN1TagType tagging)
- int [xe_integer](#) (OSCTXT *pctxt, int *object_p, ASN1TagType tagging)
- int [xe_unsigned](#) (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging)
- int [xe_int8](#) (OSCTXT *pctxt, OSINT8 *object_p, ASN1TagType tagging)
- int [xe_int16](#) (OSCTXT *pctxt, OSINT16 *object_p, ASN1TagType tagging)
- int [xe_int64](#) (OSCTXT *pctxt, OSINT64 *object_p, ASN1TagType tagging)
- int [xe_uint64](#) (OSCTXT *pctxt, OSUINT64 *object_p, ASN1TagType tagging)
- int [xe_uint8](#) (OSCTXT *pctxt, OSUINT8 *object_p, ASN1TagType tagging)
- int [xe_uint16](#) (OSCTXT *pctxt, OSUINT16 *object_p, ASN1TagType tagging)
- int [xe_bigint](#) (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)
- int [xe_bitstr](#) (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numbits, ASN1TagType tagging)
- int [xe_octstr](#) (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numocts, ASN1TagType tagging)
- int [xe_charstr](#) (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging, ASN1TAG tag)
- int [xe_16BitCharStr](#) (OSCTXT *pctxt, Asn16BitCharString *object_p, ASN1TagType tagging, ASN1TAG tag)
- int [xe_32BitCharStr](#) (OSCTXT *pctxt, Asn132BitCharString *object_p, ASN1TagType tagging, ASN1TAG tag)
- int [xe_null](#) (OSCTXT *pctxt, ASN1TagType tagging)
- int [xe_objid](#) (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging)
- int [xe_oid64](#) (OSCTXT *pctxt, ASN1OID64 *object_p, ASN1TagType tagging)
- int [xe_reloid](#) (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging)
- int [xe_enum](#) (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging)
- int [xe_enumUnsigned](#) (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging)
- int [xe_real](#) (OSCTXT *pctxt, OSREAL *object_p, ASN1TagType tagging)
- int [xe_OpenType](#) (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numocts)
- int [xe_OpenTypeExt](#) (OSCTXT *pctxt, OSRTDList *pElemList)
- int [xe_real10](#) (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)
- int [xe_derReal10](#) (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)
- int [xe_setp](#) (OSCTXT *pctxt, OSOCTET *buf_p, int bufsiz)
- OSOCTET * [xe_getp](#) (OSCTXT *pctxt)
- void [xe_free](#) (OSCTXT *pctxt)
- int [xe_expandBuffer](#) (OSCTXT *pctxt, size_t length)
- int [xe_memcpy](#) (OSCTXT *pctxt, const OSOCTET *object_p, size_t length)
- int [xe_len](#) (OSCTXT *pctxt, int length)
- int [xe_derCanonicalSort](#) (OSCTXT *pctxt, OSRTSList *pList)
- int [xe_TagAndIndefLen](#) (OSCTXT *pctxt, ASN1TAG tag, int length)
- void [xe_getBufLocDescr](#) (OSCTXT *pctxt, OSUINT32 length, [Asn1BufLocDescr](#) *pDescr)
- int [derEncBitString](#) (OSCTXT *pctxt, const OSOCTET *pvalue, OSUINT32 numbits, ASN1TagType tagging)

6.6.1 Detailed Description

BER/DER C encode functions handle the BER encoding of the primitive ASN.1 data types and ASN.1 length and tag fields within a message. Calls to these functions are assembled in the C source code generated by the ASN1C compiler to accomplish the encoding of complex ASN.1 structures. These functions are also directly callable from within a user's application program if the need to accomplish a low level encoding function exists.

The procedure to call the encode function that encodes a primitive type is the same as the procedure to call a compiler generated encode function described above. The `rtxInitContext` and `xe_setp` functions must first be called to initialize a context variable and set a pointer to the buffer into which the variable is to be encoded. A static encode buffer is specified by specifying a pointer to a buffer and buffer size. Setting the buffer address to NULL and buffer size to 0 specifies a dynamic buffer. The primitive encode function is invoked. Finally, `xe_getp` is called to retrieve a pointer to the encoded message component.

6.6.2 Define Documentation

6.6.2.1 `#define xe_utf8str(pctxt, object_p, tagging) xe_charstr (pctxt, (const char*)object_p, tagging, ASN_ID_UTF8String)`

This function will encode a variable one of ASN.1 UTF-8 character string type.

Parameters

pctxt Pointer to a context block structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a null-terminated UTF-8 C character string to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3 Function Documentation

6.6.3.1 `int derEncBitString (OSCTXT * pctxt, const OSOCTET * pvalue, OSUINT32 numbits, ASN1TagType tagging)`

This function encodes a BIT STRING value in accordance with the Distinguished Encoding Rules (DER). It adjusts the bit count to remove trailing zero bits and then invokes the BER encode function.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pvalue Bit string to be encoded.

numbits Number of bits in the bit string.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.2 `int xe_16BitCharStr (OSCTXT * pctxt, Asn116BitCharString * object_p, ASN1TagType tagging, ASN1TAG tag)`

This function will encode a variable one of the ASN.1 character string types that are based on a 16-bit character set. This includes the ASN.1 BMP character string type.

Parameters

pctxt Pointer to a context block structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a structure representing a 16-bit character string to be encoded. This structure contains a character count element and a pointer to an array of 16-bit character elements represented as 16-bit short integers.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

tag The Universal ASN.1 tag to be encoded in the message. This parameter is passed using the internal representation discussed in Section 4.1.2. It is passed as an unsigned 16-bit integer. The tag value must represent one of the 16-bit character string types documented in the X.680 standard.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.3 `int xe_32BitCharStr (OSCTXT * pctxt, Asn132BitCharString * object_p, ASN1TagType tagging, ASN1TAG tag)`

This function will encode a variable one of the ASN.1 character string types that are based on a 32-bit character set. This includes the ASN.1 Universal character string type.

Parameters

pctxt Pointer to a context block structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a structure representing a 32-bit character string to be encoded. This structure contains a character count element and a pointer to an array of 32-bit character elements represented as 16-bit short integers.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

tag The Universal ASN.1 tag to be encoded in the message. This parameter is passed using the internal representation discussed in Section 4.1.2. It is passed as an unsigned 32-bit integer. The tag value must represent one of the 32-bit character string types documented in the X.680 standard.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.4 `int xe_bigint (OSCTXT * pctxt, const char * object_p, ASN1TagType tagging)`

This function encodes a variable of the ASN.1 INTEGER type. In this case, the integer is assumed to be of a larger size than can fit in a C or C++ long type (normally 32 or 64 bits). For example, parameters used to calculate security values are typically larger than these sizes.

Items of this type are stored in character string constant variables. They can be represented as decimal strings (with no prefixes), as hexadecimal strings starting with a "0x" prefix, as octal strings starting with a "0o" prefix or as binary strings starting with a "0b" prefix. Other radices currently are not supported. Non-decimal values are assumed to be in two's complement form, unless a leading zero is included. It is highly recommended to use the hexadecimal or binary strings for better performance.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to a character string containing the value to be encoded.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.5 `int xe_bitstr (OSCTXT * pctxt, const OSOCTET * object_p, OSUINT32 numbits, ASN1TagType tagging)`

This function will encode a variable of the ASN.1 BIT STRING type.

Parameters

pctxt Pointer to a context block structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to an OCTET string containing the bit data to be encoded. The string contains bytes having the actual bit settings as they are to be encoded in the message.

numbits The number of bits within the bit string to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.6 `int xe_boolean (OSCTXT * pctxt, OSBOOL * object_p, ASN1TagType tagging)`

This function will encode a variable of the ASN.1 BOOLEAN type.

Parameters

pctxt A pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

**object_p* A pointer to the BOOLEAN value to be encoded (note that pointer to the BOOLEAN is passed, not the BOOLEAN itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). A BOOLEAN is defined as a single OCTET whose value is 0 for FALSE and any other value for TRUE.

tagging An enumerated type whose value is set to either ASN1EXPL (for explicit tagging) or ASN1IMPL (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to ASN1EXPL.

Returns

The length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.7 int xe_charstr (OSCTXT *pctx, const char *object_p, ASN1TagType tagging, ASN1TAG tag)

This function will encode a variable one of the ASN.1 character string types that are based 8-bit character sets. This includes IA5String, VisibleString, PrintableString, and NumericString

Parameters

pctx Pointer to a context block structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a null-terminated C character string to be encoded

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

tag The Universal ASN.1 tag to be encoded in the message. This parameter is passed using the internal representation discussed in Section 4.1.2. It is passed as an unsigned 16-bit integer. The tag value must represent one of the 8-bit character string types documented in the X.680 standard.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.8 int xe_derCanonicalSort (OSCTXT *pctx, OSRTSList *pList)

This function is added to the generated code for SEQUENCE OF/SET OF constructs to ensure the elements are in the required canonical order for DER.

If the elements are not in the right order, they are sorted to be in the correct order prior to encoding.

Parameters

pctx Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pList Linked List of message components to be sorted. The elements of this list are offsets to encoded components within the encode buffer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.6.3.9 int xe_derReal10 (OSCTXT * *pctxt*, const char * *object_p*, ASN1TagType *tagging*)

This function will encode a number from character string to ASN.1 real type with using CER/DER decimal encoding. Number may be represented in integer, decimal, and exponent formats.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.10 int xe_enum (OSCTXT * *pctxt*, OSINT32 * *object_p*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 ENUMERATED type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to an integer containing the enumerated value to be encoded (Note that a pointer to the value is passed not the value itself. This may seem awkward, but to keep the calling sequence of all the encode function the same, pointers were used in all cases.)

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.11 int xe_enumUnsigned (OSCTXT * *pctxt*, OSUINT32 * *object_p*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 ENUMERATED type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to an integer containing the enumerated value to be encoded (Note that a pointer to the value is passed not the value itself. This may seem awkward, but to keep the calling sequence of all the encode function the same, pointers were used in all cases.)

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.12 **int xe_expandBuffer (OSCTXT * *pctxt*, size_t *length*)**

This function will expand a dynamic encode buffer.

The dynamic encode buffer is the buffer that is allocated if dynamic encoding of a message is enabled (passing NULL as the buffer pointer argument to xe_setp enables dynamic encoding.)

The size of the new buffer is determined by the length argument. If the length is less than a configurable buffer expansion increment size (the constant ASN_K_ENCBUFSIZ), the buffer is expanded by the increment size; otherwise it is expanded by the actual length value.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls. The dynamic encode buffer pointer is contained within the structure.

length The number of bytes required. This may not be size the size the buffer is actually expanded by. The buffer will be expanded by a fixed-size increment defined by ASN_K_ENCBUFSIZ for small requests to limit the required number of expansions.

6.6.3.13 **void xe_free (OSCTXT * *pctxt*)**

This function will free a dynamic encode buffer.

The dynamic encode buffer is the buffer that is allocated if dynamic encoding of a message is enabled (passing NULL as the buffer pointer argument to xe_setp enables dynamic encoding.)

Note that this is different than the xu_freeall function associated with freeing decoder memory. This function only releases the memory associated with a dynamic encoded buffer. The xu_freeall will not release this memory.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls. The dynamic encode buffer pointer is contained within the structure.

Referenced by ASN1BEREncodeBuffer::freeBuffer().

6.6.3.14 **void xe_getBufLocDescr (OSCTXT * *pctxt*, OSUINT32 *length*, Asn1BufLocDescr * *pDescr*)**

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

length The actual length of existing message components.

pDescr A pointer to a buffer location descriptor.

6.6.3.15 **OSOCKET* xe_getp (OSCTXT * *pctxt*)**

This function is used to obtain a pointer to the start of an encoded message after calls to the encode function(s) are complete. ANS.1 messages are encoded from the end of a given buffer toward the beginning. Therefore, in practically all cases, the start of the message will not be at the beginning of the buffer.

Parameters

pctxt A pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

Returns

A pointer to the beginning of the encoded message.

6.6.3.16 int xe_identifier (OSCTXT * *pctxt*, OSUINT32 *ident*)

This function is used to encode an ASN.1 identifier value.

Parameters

pctxt A pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

ident Identifier value to be encoded.

Returns

Length of the encoded item.

6.6.3.17 int xe_int16 (OSCTXT * *pctxt*, OSINT16 * *object_p*, ASN1TagType *tagging*)

This function encodes a 16-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to the 16-bit INTEGER value to be encoded (note that a pointer is passed, not the INTEGER value itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). The OSINT16 type is set to the C type 'short' in the rtxsrc/rtxCommon.h file. This is assumed to represent a 16-bit integer value.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.18 int xe_int64 (OSCTXT * *pctxt*, OSINT64 * *object_p*, ASN1TagType *tagging*)

This function encodes a 64-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to the 64-bit INTEGER value to be encoded (note that a pointer to the INTEGER is passed, not the INTEGER value itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). The OSINT64 type is set to the C type '___int64', 'long long' or 'long' in the rtxsrc/rtxCommon.h file (depends on the used platform and the compiler). This is assumed to represent a 64-bit integer value.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.19 int xe_int8 (OSCTXT * *pctxt*, OSINT8 * *object_p*, ASN1TagType *tagging*)

This function encodes an 8-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to the 8-bit INTEGER value to be encoded (note that a pointer is passed, not the INTEGER value itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). The OSINT8 type is set to the C type 'signed char' in the rtxsrc/rtxCommon.h file. This is assumed to represent an 8-bit integer value.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.20 int xe_integer (OSCTXT * *pctxt*, int * *object_p*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to the INTEGER value to be encoded (note that a pointer to the INTEGER is passed, not the INTEGER value itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). The OSINT32 type is set to the C type 'int' in the rtxsrc/rtxCommon.h file. This is assumed to represent a 32-bit integer value.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.21 `int xe_len (OSCTXT * pctxt, int length)`

This function is used to encode BER or DER length determinant values.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

length The length variable to encode. For indefinite length, use ASN_K_INDEFLEN.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.22 `int xe_memcpy (OSCTXT * pctxt, const OSOCTET * object_p, size_t length)`

This function is used to copy bytes into the encode buffer. BER and DER messages are encoded from back-to-front and this function will take this into account when copying bytes. It will also check to ensure that enough space is available in the buffer for the bytes to be copied. If the encode buffer is dynamic, it will be expanded to hold the number of bytes to be copied if not enough space is available. If the buffer is static and enough space is not available, an error (RTERR_BUFOVFLW) will be returned.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls. The dynamic encode buffer pointer is contained within the structure.

object_p A pointer to a buffer containing the bytes to be copied.

length The number of bytes to copy.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.23 `int xe_null (OSCTXT * pctxt, ASN1TagType tagging)`

This function will encode an ASN.1 NULL placeholder.

Parameters

pctxt Pointer to a context block structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.24 `int xe_objid (OSCTXT * pctxt, ASN1OBJID * object_p, ASN1TagType tagging)`

This function encodes a value of the ASN.1 object identifier type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p Pointer to value to be encoded. The ASN1OBJID structure contains a numids fields to hold the number of subidentifiers and an array to hold the subidentifier values.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.25 `int xe_octstr (OSCTXT * pctxt, const OSOCTET * object_p, OSUINT32 numocts, ASN1TagType tagging)`

This function will encode a variable of the ASN.1 OCTET STRING type.

Parameters

pctxt Pointer to a context block structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to an OCTET string containing the bit data to be encoded. The string contains bytes having the actual bit settings as they are to be encoded in the message.

numocts The number of octets (bytes) within the OCTET STRING to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.26 `int xe_oid64 (OSCTXT * pctxt, ASN1OID64 * object_p, ASN1TagType tagging)`

This function encodes a value of the ASN.1 object identifier type, using 64-bit subidentifiers.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p Pointer to value to be encoded. The ASN1OID64 structure contains a numids fields to hold the number of subidentifiers and an array of unsigned 64-bit integers to hold the subidentifier values.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.27 **int xe_OpenType (OSCTXT * *pctxt*, const OSOCTET * *object_p*, OSUINT32 *numocts*)**

This function will encode a variable of the old (pre- 1994) ASN.1 ANY type or other elements defined in the later standards to be Open Types (for example, a variable type declaration in a CLASS construct as defined in X.681).

A variable of this type is considered to be previously encoded ASN.1 message component.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a buffer containing an encoded ASN.1 message component.

numocts The number of octets to be encoded.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.28 **int xe_OpenTypeExt (OSCTXT * *pctxt*, OSRTDList * *pElemList*)**

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pElemList A pointer to open type to be encoded.

6.6.3.29 **int xe_real (OSCTXT * *pctxt*, OSREAL * *object_p*, ASN1TagType *tagging*)**

This function will encode a variable of the REAL data type.

This function provides support for the plus-infinity and minus-infinity special real values. Use the `rtxGetPlusInfinity` or `rtxGetMinusInfinity` functions to get these special values.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a variable of the OSREAL data type. This is defined to be the C double type. Special real values plus and minus infinity are encoded by using the `rtxGetPlusInfinity` and `rtxGetMinusInfinity` functions to set the real value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.30 **int xe_real10 (OSCTXT * *pctxt*, const char * *object_p*, ASN1TagType *tagging*)**

This function will encode a number from character string to ASN.1 real type using decimal encoding. Number may be represented in integer, decimal, and exponent formats.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.31 int xe_reloid (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging)

This function encodes a value of the ASN.1 RELATIVE-OID type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p Pointer to value to be encoded. The ASN1OBJID structure contains a numids fields to hold the number of subidentifiers and an array to hold the subidentifier values.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.32 int xe_setp (OSCTXT *pctxt, OSOCTET *buf_p, int bufsiz)

This function is used to set the internal buffer within the runtime library encoding context. It must be called after the context variable is initialized by the rtxInitContext function and before any other compiler generated or runtime library encode function.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

**buf_p* A pointer to a memory buffer to use to encode a message. The buffer should be declared as an array of unsigned characters (OSOCTETs). This parameter can be set to NULL to specify dynamic encoding (i.e., the encode functions will dynamically allocate a buffer for the message).

bufsiz The length of the memory buffer in bytes.

6.6.3.33 int xe_tag (OSCTXT *pctxt, ASN1TAG tag)

This function is used to encode an ASN.1 tag value given its parts (class, form, and ID code).

Parameters

pctxt A pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tag The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

Returns

Length of the encoded tag component.

6.6.3.34 int xe_tag_len (OSCTXT *pctxt, ASN1TAG tag, int length)

This function is used to encode ASN.1 tag and length fields that preface each block of message data. The ASN1C compiler generates calls to this function to handle the encoding of user-defined tags within an ASN.1 specification. The function is also called from within the runtime library functions to handle the addition of the universal tags defined for each of the ASN.1 primitive data types.

Parameters

pctxt A pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tag The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

length The length of the contents field previously encoded. This parameter can be used to specify the actual length, or the special constant ASN_K_INDEFLEN can be used to specify that an indefinite length specification should be encoded.

Returns

Length of the encoded message component. This is equal to the given length plus the additional bytes that are added for the tag and length fields. A negative status will be returned if the encoding is not successful.

6.6.3.35 int xe_TagAndIndefLen (OSCTXT *pctxt, ASN1TAG tag, int length)

This function is used to encode a tag value and an indefinite length.

This can be used to manually create an indefinite length wrapper around long records.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tag ASN.1 tag value to be encoded.

length The actual length of existing message components.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.36 `int xe_uint16 (OSCTXT * pctxt, OSUINT16 * object_p, ASN1TagType tagging)`

This function encodes an unsigned 16-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to the unsigned 16-bit INTEGER value to be encoded (note that a pointer is passed, not the INTEGER value itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). The OSUINT16 type is set to the C type 'unsigned short' in the rtxsrc/rtxCommon.h file. This is assumed to represent a 16-bit integer value.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.37 `int xe_uint64 (OSCTXT * pctxt, OSUINT64 * object_p, ASN1TagType tagging)`

This function encodes an unsigned 64-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to the unsigned 64-bit INTEGER value to be encoded (note that a pointer to the unsigned INTEGER is passed, not the INTEGER value itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). The OSUINT64 type is set to the C type 'unsigned __int64', 'unsigned long long' or 'unsigned long' in the rtxsrc/rtxCommon.h file (depends on the used platform and the compiler). This is assumed to represent a 64-bit integer value.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.38 `int xe_uint8 (OSCTXT * pctxt, OSUINT8 * object_p, ASN1TagType tagging)`

This function encodes an unsigned 8-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to the unsigned 8-bit INTEGER value to be encoded (note that a pointer is passed, not the INTEGER value itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). The OSOCTET type is set to the C type 'unsigned char' in the rtxsrc/rtxCommon.h file. This is assumed to represent an 8-bit integer value.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.6.3.39 int xe_unsigned (OSCTXT * *pctxt*, OSUINT32 * *object_p*, ASN1TagType *tagging*)

This function encodes an unsigned variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to context block structure.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

object_p A pointer to the unsigned INTEGER value to be encoded (note that a pointer to the unsigned INTEGER is passed, not the INTEGER value itself. This may seem awkward, but to keep the calling sequence of all encode functions the same, pointers were used in all cases). The OSUINT32 type is set to the C type 'unsigned int' in the rtxsrc/rtxCommon.h file. This is assumed to represent a 32-bit integer value.

Returns

Length of the encoded message component. A negative status value will be returned if encoding is not successful.

6.7 BER/PER C Utility Functions

Defines

- #define **xu_addTagErrParm** berErrAddTagParm
- #define **xu_hex_dump**(msg, numoct, hdr) rtxHexDump(msg,numoct)

Functions

- int **berDefToIndefLen** (OSCTXT *pSrcCtxt, OSCTXT *pDstCtxt)
- int **berIndefToDefLen** (OSCTXT *pSrcCtxt, OSCTXT *pDstCtxt)
- OSBOOL **berErrAddTagParm** (OSCTXT *pctxt, ASN1TAG tag)
- int **berErrUnexpTag** (OSCTXT *pctxt, ASN1TAG exptag)
- int **berGetLibVersion** (OSVOIDARG)
- const char * **berGetLibInfo** (OSVOIDARG)
- int **berParseTagLen** (const OSOCTET *buffer, size_t bufidx, size_t bufsiz, ASN1TAG *ptag, size_t *plen)
- const char * **berTagToString** (ASN1TAG tag, char *buffer, size_t bufsiz)
- const char * **berTagToDynStr** (OSCTXT *pctxt, ASN1TAG tag)
- int **xu_verify_len** (OSOCTET *msg_p)
- void * **xu_parse_mmbuf** (OSOCTET **buf_p2, int *buflen_p, OSOCTET *start_p, int bufsiz)
- void **xu_alloc_array** (OSCTXT *pctxt, ASN1SeqOf *seqOf_p, int recSize, int recCount)
- void **xu_octscopy_s** (OSUINT32 *nocts_p, OSOCTET *data_p, char *cstr, char zterm)
- void **xu_octscopy_ss** (ASN1OctStr *octStr_p, char *cstring, char zterm)
- void **xu_octscopy_d** (OSCTXT *pctxt, OSUINT32 *nocts_p, const OSOCTET **data_p2, char *cstring, char zterm)
- void **xu_octscopy_ds** (OSCTXT *pctxt, ASN1DynOctStr *octStr_p, char *cstring, char zterm)
- void **xu_octmcpy_s** (ASN1OctStr *octStr_p, void *data_p, int datalen)
- void **xu_octmcpy_d** (OSCTXT *pctxt, ASN1DynOctStr *octStr_p, void *data_p, int datalen)
- char * **xu_fetchstr** (int numocts, char *data)
- int **xu_hexstcpy** (char *data, char *hstring)
- int **xu_binstcpy** (char *data, char *bstring)
- int **xu_dump** (const OSOCTET *msgptr, ASN1DumpCbFunc cb, void *cbArg_p)
- int **xu_fdump** (FILE *file_p, const OSOCTET *msgptr)
- int **xu_dump2** (OSCTXT *pctxt, const OSOCTET *msgptr)
- void **xu_fmt_tag** (ASN1TAG *tag_p, char *class_p, char *form_p, char *id_code)
- char * **xu_fmt_tag2** (ASN1TAG *tag_p, char *bufp)
- char * **xu_fmt_contents** (OSCTXT *pctxt, int len, int *count)
- int **xu_fread** (FILE *fp, OSOCTET *bufp, int bufsiz)
- void **xu_SaveBufferState** (OSCTXT *pCtxt, OSRTBufSave *pSavedInfo)
- void **xu_RestoreBufferState** (OSCTXT *pCtxt, OSRTBufSave *pSavedInfo)
- int **berReadMsgFromSocket** (OSCTXT *pctxt, OSRTSOCKET socket, OSOCTET *buffer, int bufsiz, OSOCTET **ppDestBuffer, int *pMessageSize)

6.7.1 Detailed Description

BER/DER utility functions are provided for memory management, formatting output of ASN.1 messages, and error reporting. In many cases, these functions are closely coupled with the rt (runtime) series of common functions. The common functions provide common functionality shared between the BER/DER, PER, and XER runtime libraries. In many cases, these functions simply provide wrappers to the rt functions to maintain compatibility with existing versions of the ASN1C compiler.

6.7.2 Define Documentation

6.7.2.1 #define xu_hex_dump(msg, numoct, hdr) rtxHexDump(msg,numoct)

This function dumps binary data in raw hexadecimal and character text formats. It can be used only to examine runtime library encode/decode functions input or output data. This function outputs data only to the standard output device.

This function is considered depreciated and is only being maintained to provide backward compatibility with older versions of ASN1C.

Parameters

msg A pointer to the start of the block of memory to be dumped.

numoct The number of octets (bytes) to be dumped.

hdr A Boolean variable indicating whether or not a head line should be dumped as the first line of the display.

6.7.3 Function Documentation

6.7.3.1 int berDefToIndefLen (OSCTXT *pSrcCtxt, OSCTXT *pDstCtxt)

This function converts BER encoded message with definite form of length to BER encoded message with indefinite form of length.

Parameters

pSrcCtxt A pointer to a source OSCTXT structure.

pDstCtxt A pointer to a destination OSCTXT structure.

Returns

Status of the conversion operation. Possible values are 0 if conversion is successful or one of the negative status codes.

6.7.3.2 OSBOOL berErrAddTagParm (OSCTXT *pctxt, ASN1TAG tag)

This function adds a tag parameter to the context error structure.

Parameters

pctxt Pointer to a context structure.

tag The tag to add.

Returns

Pointer to the text string (buffer).

6.7.3.3 int berErrUnexpTag (OSCTXT *pctxt, ASN1TAG expTag)

This function logs a BER unexpected tag error (IDNOTFOU) by adding the expected and parsed tag to the error context and returning the error status.

Parameters

pctxt Pointer to a context structure.

exptag Expected tag.

Returns

RTERR_IDNOTFOU status code.

6.7.3.4 `const char* berGetLibInfo (OSVOIDARG)`

This function returns a string that describes the features of the BER runtime library. Different release kits will return different strings. An example would be "ASN1BER v6.1.1, opt, compact, limited."

6.7.3.5 `int berGetLibVersion (OSVOIDARG)`

This function returns an integer representation of the BER library version.

6.7.3.6 `int berIndefToDefLen (OSCTXT *pSrcCtxt, OSCTXT *pDstCtxt)`

This function converts BER encoded message with indefinite form of length to BER encoded message with definite form of length.

Parameters

pSrcCtxt A pointer to a source OSCTXT structure.

pDstCtxt A pointer to a destination OSCTXT structure.

Returns

Status of the conversion operation. Possible values are 0 if conversion is successful or one of the negative status codes.

6.7.3.7 `int berParseTagLen (const OSOCTET *buffer, size_t bufidx, size_t bufsiz, ASN1TAG *ptag, size_t *plen)`

This function parses a tag and length value starting at the given buffer pointer location. This is assumed to be pointing at the beginning of a TLV. It is similar to `xd_tag_len`, except it does not require an initialized context to work. This makes it a better alternative in terms of performance when it is only necessary to get tag and length info without having to do full decoding.

Parameters

buffer Pointer to buffer containing BER-encoded data to parse.

bufidx Index within buffer that parsing is to begin. It is expected that `buffer[bufidx]` is pointing at the start of a TLV (tag-length-value).

bufsiz Size of the BER-encoded message.

ptag Pointer to tag variable to receive parsed tag value.

plen Pointer to length variable to receive parsed length.

Returns

Pointer to the text string (`buffer`).

6.7.3.8 **int berReadMsgFromSocket (OSCTXT * *pctxt*, OSRTSOCKET *socket*, OSOCTET * *buffer*, int *bufsiz*, OSOCTET ** *ppDestBuffer*, int * *pMessageSize*)**

This routine reads the BER message into the given buffer. The TLV can be of indefinite length. If buffer is NULL, dynamic buffer will be allocated and returned as ppDestBuffer. Length of the message will be returned in pMessageSize.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

socket The socket to read from. It should be already connected TCP socket.

buffer The static buffer to receive the parsed data. Can be NULL.

bufsiz The size of the buffer to receive the parsed data. Should be 0, if *buffer* is NULL.

ppDestBuffer The pointer to receive the destination buffer pointer. If *buffer* is static, this parameter can be NULL.

pMessageSize The pointer to integer to receive the size of read message.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.7.3.9 **const char* berTagToDynStr (OSCTXT * *pctxt*, ASN1TAG *tag*)**

This function converts an internal binary ASN.1 tag to a string in standard ASN.1 syntax form. This version creates a dynamic string by allocating memory using the rxMemAlloc function. This memory will be release when context memory is freed.

Parameters

pctxt Pointer to a context structure.

tag The tag to convert.

Returns

Pointer to dynamic text string.

6.7.3.10 **const char* berTagToString (ASN1TAG *tag*, char * *buffer*, size_t *bufsiz*)**

This function converts an internal binary ASN.1 tag to a string in standard ASN.1 syntax form.

Parameters

tag The tag to convert.

buffer Text buffer into which the string will be written.

bufsiz Size of the text buffer.

Returns

Pointer to the text string (*buffer*).

6.7.3.11 void xu_alloc_array (OSCTXT * *pctxt*, ASN1SeqOf * *seqOf_p*, int *recSize*, int *recCount*)

This function will allocate space for a given count of fixed size elements.

Parameters

pctxt A pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

seqOf_p A pointer to a generic sequence of structure variables to receive the returned memory. This structure contains a record count and a data pointer element. The record count is populated with the *recCount* passed into the function. The data pointer is set to the value that is returned from the memory allocation function.

recSize The number of bytes in one record in the array.

recCount The number of records to allocate. A pointer to a generic sequence of structure variable to receive the returned memory. This structure contains a record count and data pointer element. The record count is populated with the *recCount* passed into the function. The data pointer is set to the value that is returned from the memory allocation function.

6.7.3.12 int xu_dump (const OSOCTET * *msgptr*, ASN1DumpCbFunc *cb*, void * *cbArg_p*)

This function dumps an encoded ASN.1 message to the standard output device or to another interface in a formatted display. The display includes, for each message component, message tag (class, form, and ID code) and data (in hexadecimal and character text formats).

This function is invoked for each line of text formatted from the given message. The formatted line is passed on the *text_p* argument. The *cbArg_p* argument allows a user to defined callback argument to be passed to the callback function. This argument is specified in the call to *xu_dump*.

Use of the callback function is optional. If dump to standard output (stdout) is desired, the argument should be specified as NULL (note: the macro XU_DUMP in *rtxsrc/rtxCommon.h* can be used for this purpose).

Parameters

**msgptr* A pointer to an encoded ASN.1 message.

cb Callback function that gets invoked for each line of formatted output. For a dump to standard output (stdout), this parameter can be specified as NULL.

cbArg_p Callback function argument will be passed to the callback function.

Returns

Status of the dump operation. Possible values are 0 if decoding is successful or one of the negative status codes.

Referenced by ASN1BERMessageBuffer::binDump().

6.7.3.13 int xu_dump2 (OSCTXT * *pctxt*, const OSOCTET * *msgptr*)

This function dumps an encoded ASN.1 message to the standard output device or to another interface in a formatted display. The display includes, for each message component, message tag (class, form, and ID code) and data (in hexadecimal and character text formats).

This function is invoked for each line of text formatted from the given message. If a print stream has been registered using the *rtxSetPrintStream* or *rtxSetGlobalPrintStream* functions, the output of *xu_dump2* will be sent to the stream instead of standard output.

Parameters

- *pctxt* A pointer to an OSCTXT structure.
- *msgptr* A pointer to an encoded ASN.1 message.

Returns

Status of the dump operation. Possible values are 0 if decoding is successful or one of the negative status codes.

See also

- rtxSetPrintStream
- rtxSetGlobalPrintStream

6.7.3.14 int xu_fdump (FILE * *file_p*, const OSOCTET * *msgptr*)

This function dumps an encoded ASN.1 message to a text file. The display includes, for each message component, message tag (class, form, and ID code), length, and data (in hexadecimal and character text formats).

Parameters

- *file_p* A text file pointer.
- *msgptr* A pointer to an encoded ASN.1 message buffer.

Returns

Status of the dump operation. Possible values are 0 if decoding is successful or one of the negative status codes.

6.7.3.15 void xu_RestoreBufferState (OSCTXT * *pCtxt*, OSRTBufSave * *pSavedInfo*)

This function is used to restore the current buffer state from previously saved info.

Parameters

- pCtxt* - A pointer to a context structure.
- pSavedInfo* - A pointer to a structure holding the saved info.

6.7.3.16 void xu_SaveBufferState (OSCTXT * *pCtxt*, OSRTBufSave * *pSavedInfo*)

This function is used to save the current buffer state.

Parameters

- pCtxt* - A pointer to a context structure.
- pSavedInfo* - A pointer to a structure to hold the saved info.

6.8 Streaming BER Runtime Library Functions.

Modules

- [C Streaming BER Encode Functions.](#)
- [C Streaming BER Decode Functions.](#)

Defines

- `#define BS_CHKEOB(pctxt)`
- `#define BS_CHKEND(pctxt, ccb_p)`

Functions

- `int berStrmInitContext (OSCTXT *pctxt)`
- `int berStrmInitContextUsingKey (OSCTXT *pctxt, const OSOCTET *key, size_t keylen)`
- `int berStrmFreeContext (OSCTXT *pctxt)`
- `int cerEncCanonicalSort (OSCTXT *pctxt, OSCTXT *pMemCtxt, OSRTSList *pList)`
- `void cerGetBufLocDescr (OSCTXT *pctxt, Asn1BufLocDescr *pDescr)`
- `void cerAddBufLocDescr (OSCTXT *pctxt, OSRTSList *pElemList, Asn1BufLocDescr *pDescr)`

6.8.1 Detailed Description

The streaming BER functions handle the BER encode of primitive ASN.1 data types. Calls to these functions are assembled in the C source code generated by the ASN1C compiler (with -stream option) to accomplish the encoding of complex ASN.1 structures. These functions are also directly callable from within a user's application program if the need to accomplish a low level encoding function exists. In contrast to the non-streaming C BER functions, these operate with streams, rather than the memory buffer, the sources or destination. Thus, the data may be encoded directly to the file stream or socket output stream and may be decoded directly from the file or socket input stream.

6.8.2 Define Documentation

6.8.2.1 `#define BS_CHKEND(pctxt, ccb_p)`

Value:

```
((ccb_p)->stat = 0, \
((ccb_p)->len == ASN_K_INDFLEN) ? berDecStrmTestEOC (pctxt,ccb_p) : \
(((int) (OSRTSTREAM_BYTEINDEX(pctxt) - (ccb_p)->bytes) >= (ccb_p)->len))))
```

6.8.2.2 `#define BS_CHKEOB(pctxt)`

Value:

```
((pctxt)->buffer.byteIndex + 2 > (pctxt)->buffer.size) ? TRUE : \
((pctxt)->buffer.data[(pctxt)->buffer.byteIndex] == 0 && \
(pctxt)->buffer.data[(pctxt)->buffer.byteIndex + 1] == 0) ? \
TRUE : FALSE))
```

6.8.3 Function Documentation

6.8.3.1 `int berStrmFreeContext (OSCTXT * pctxt)`

This function closes the stream and frees all dynamic memory associated with a context.

Parameters

pctxt A pointer to a context structure.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.8.3.2 `int berStrmInitContext (OSCTXT * pctxt)`

This function initializes an OSCTXT block for further streaming operations. It makes sure that if the block was not previously initialized, that all key working parameters are set to their correct initial state values (i.e. declared within a function as a normal working variable). It also initialize stream block.

Parameters

pctxt Pointer to context structure variable to be initialized.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

6.9 C Streaming BER Encode Functions.

Functions

- int `berEncStrmBigInt` (OSCTXT *pctx, const char *pvalue, ASN1TagType tagging)
- int `berEncStrmBigIntNchars` (OSCTXT *pctx, const char *pvalue, size_t nchars, ASN1TagType tagging)
- int `berEncStrmBitStr` (OSCTXT *pctx, const OSOCTET *object_p, OSUINT32 numbits, ASN1TagType tagging)
- int `berEncStrmBMPStr` (OSCTXT *pctx, const Asn116BitCharString *object_p, ASN1TagType tagging)
- int `berEncStrmBool` (OSCTXT *pctx, OSBOOL value, ASN1TagType tagging)
- int `berEncStrmCharStr` (OSCTXT *pctx, const char *object_p, ASN1TagType tagging, ASN1TAG tag)
- int `berEncStrmDefLength` (OSCTXT *pctx, size_t length)
- int `berEncStrmEOC` (OSCTXT *pctx)
- int `berEncStrmEnum` (OSCTXT *pctx, OSINT32 value, ASN1TagType tagging)
- int `berEncStrmInt` (OSCTXT *pctx, OSINT32 value, ASN1TagType tagging)
- int `berEncStrmInt8` (OSCTXT *pctx, OSINT8 value, ASN1TagType tagging)
- int `berEncStrmInt16` (OSCTXT *pctx, OSINT16 value, ASN1TagType tagging)
- int `berEncStrmInt64` (OSCTXT *pctx, OSINT64 value, ASN1TagType tagging)
- int `berEncStrmLength` (OSCTXT *pctx, int length)
- int `berEncStrmNull` (OSCTXT *pctx, ASN1TagType tagging)
- int `berEncStrmObjId` (OSCTXT *pctx, const ASN1OBJID *object_p, ASN1TagType tagging)
- int `berEncStrmObjId64` (OSCTXT *pctx, const ASN1OID64 *object_p, ASN1TagType tagging)
- int `berEncStrmOctStr` (OSCTXT *pctx, const OSOCTET *object_p, OSUINT32 numocts, ASN1TagType tagging)
- int `berEncStrmOpenTypeExt` (OSCTXT *pctx, OSRTDList *pElemList)
- int `berEncStrmReal` (OSCTXT *pctx, OSREAL value, ASN1TagType tagging)
- int `berEncStrmReal10` (OSCTXT *pctx, const char *object_p, ASN1TagType tagging)
- int `cerEncStrmReal10` (OSCTXT *pctx, const char *object_p, ASN1TagType tagging)
- int `berEncStrmRelativeOID` (OSCTXT *pctx, const ASN1OBJID *object_p, ASN1TagType tagging)
- int `berEncStrmTag` (OSCTXT *pctx, ASN1TAG tag)
- int `berEncStrmTagAndLen` (OSCTXT *pctx, ASN1TAG tag, int length)
- int `berEncStrmTagAndIndefLen` (OSCTXT *pctx, ASN1TAG tag)
- int `berEncStrmUInt` (OSCTXT *pctx, OSUINT32 value, ASN1TagType tagging)
- int `berEncStrmUInt8` (OSCTXT *pctx, OSUINT8 value, ASN1TagType tagging)
- int `berEncStrmUInt16` (OSCTXT *pctx, OSUINT16 value, ASN1TagType tagging)
- int `berEncStrmUInt64` (OSCTXT *pctx, OSUINT64 value, ASN1TagType tagging)
- int `berEncStrmUnivStr` (OSCTXT *pctx, const Asn132BitCharString *object_p, ASN1TagType tagging)
- int `berEncStrmXSDAny` (OSCTXT *pctx, OSXSDAny *pvalue, ASN1TagType tagging)
- int `berEncStrmWriteOctet` (OSCTXT *pctx, OSOCTET octet)
- int `berEncStrmWriteOctets` (OSCTXT *pctx, const OSOCTET *pocets, size_t numocts)
- int `cerEncStrmBMPStr` (OSCTXT *pctx, const Asn116BitCharString *object_p, ASN1TagType tagging)
- int `cerEncStrmBitStr` (OSCTXT *pctx, const OSOCTET *object_p, OSUINT32 numbits, ASN1TagType tagging)
- int `cerEncStrmCharStr` (OSCTXT *pctx, const char *object_p, ASN1TagType tagging, ASN1TAG tag)
- int `cerEncStrmOctStr` (OSCTXT *pctx, const OSOCTET *object_p, OSUINT32 numocts, ASN1TagType tagging)
- int `cerEncStrmUnivStr` (OSCTXT *pctx, const Asn132BitCharString *object_p, ASN1TagType tagging)

6.9.1 Detailed Description

The C streaming BER encode functions encode ASN.1 primitive data types directly to the output stream. It must be already opened by using any of the following functions: `rtxStreamFileOpen`, `rtxStreamFileAttach`, `rtxStreamSocketAttach`, `rtxStreamMemoryCreate`, `rtxStreamMemoryAttach`.

The streaming BER encoding uses indefinite length form for encode complex ASN.1 types.

6.9.2 Function Documentation

6.9.2.1 `int berEncStrmBigInt (OSCTXT * pctxt, const char * pvalue, ASN1TagType tagging)`

This function encodes a variable of the ASN.1 INTEGER type. In this case, the integer is assumed to be of a larger size than can fit in a C or C++ long type (normally 32 or 64 bits). For example, parameters used to calculate security values are typically larger than these sizes.

Items of this type are stored in character string constant variables. They can be represented as decimal strings (with no prefixes), as hexadecimal strings starting with a "0x" prefix, as octal strings starting with a "0o" prefix or as binary strings starting with a "0b" prefix. Other radices currently are not supported. It is highly recommended to use the hexadecimal or binary strings for better performance.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pvalue A pointer to a character string containing the value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.2 `int berEncStrmBigIntNchars (OSCTXT * pctxt, const char * pvalue, size_t nchars, ASN1TagType tagging)`

This function is similar to the `berEncStrmBigInt` function except that only the given number of characters from the character string are used as the value to be encoded.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pvalue A pointer to a character string containing the value to be encoded.

nchars Number of characters from *pvalue* to encode.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.3 `int berEncStrmBitStr (OSCTXT * pctxt, const OSOCTET * object_p, OSUINT32 numbits, ASN1TagType tagging)`

This function encodes a variable of the ASN.1 BIT STRING type.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- object_p* A pointer to an OCTET string containing the bit data to be encoded. This string contains bytes having the actual bit settings as they are to be encoded in the message.
- numbits* The number of bits within the bit string to be encoded.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.4 `int berEncStrmBMPStr (OSCTXT * pctxt, const Asn116BitCharString * object_p, ASN1TagType tagging)`

This function encodes a variable of the ASN.1 BMPString type that is based on a 16-bit character sets.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- object_p* A pointer to a structure representing a 16-bit character string to be encoded. This structure contains a character count element and a pointer to an array of 16-bit character elements represented as 16-bit short integers.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.5 `int berEncStrmBool (OSCTXT * pctxt, OSBOOL value, ASN1TagType tagging)`

This function encodes a variable of the ASN.1 BOOLEAN type.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- value* A BOOLEAN value to be encoded. A BOOLEAN is defined as a single OCTET whose value is 0 for FALSE and any other value for TRUE.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.6 int berEncStrmCharStr (OSCTXT * *pctxt*, const char * *object_p*, ASN1TagType *tagging*, ASN1TAG *tag*)

This function encodes a variable one of the ASN.1 character string types that are based on 8-bit character sets. This includes IA5String, VisibleString, PrintableString, and NumericString.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a null-terminated C character string to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

tag The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.7 int berEncStrmDefLength (OSCTXT * *pctxt*, size_t *length*)

This function encodes a definite length field to the stream.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

length Length to be encoded.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.8 int berEncStrmEnum (OSCTXT * *pctxt*, OSINT32 *value*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 ENUMERATED type. The enumerated encoding is identical to that of an integer. The compiler adds additional checks to the generated code to ensure the value is within the given set.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

value An integer containing the enumerated value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.9 int berEncStrmEOC (OSCTXT * *pctxt*)

This function encodes end-of-contents octets (EOC) into the stream. EOC is two zero octets (it is documented in the X.690 standard). This function must be called when the encoding of the complex type with indefinite length is finishing (see [berEncStrmTagAndIndefLen](#)).

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.10 int berEncStrmInt (OSCTXT * *pctxt*, OSINT32 *value*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

value An INTEGER value to be encoded. The OSINT32 type is set to the C type 'int' in the `asn1type.h` file. This is assumed to represent a 32-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.11 int berEncStrmInt16 (OSCTXT * *pctxt*, OSINT16 *value*, ASN1TagType *tagging*)

This function encodes a 16-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

value A 16-bit INTEGER value to be encoded. The OSINT16 type is set to the C type 'signed short' in the `asn1type.h` file. This is assumed to represent a 16-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.12 int berEncStrmInt64 (OSCTXT * *pctxt*, OSINT64 *value*, ASN1TagType *tagging*)

This function encodes a 64-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

value A 64-bit INTEGER value to be encoded. The OSINT64 type is set to the C type '__int64', 'long long' or 'long' in the asn1type.h file (depends on the used platform and the compiler). This is assumed to represent a 64-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.13 int berEncStrmInt8 (OSCTXT * *pctxt*, OSINT8 *value*, ASN1TagType *tagging*)

This function encodes an 8-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

value An 8-bit INTEGER value to be encoded. The OSINT8 type is set to the C type 'signed char' in the asn1type.h file. This is assumed to represent an 8-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.14 int berEncStrmLength (OSCTXT * *pctxt*, int *length*)

This function is used to encode a BER length determinant value.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

length The length variable to encode. An ASN_K_INDEFLEN constant is interpreted that an indefinite length identifier should be encoded.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.15 int berEncStrmNull (OSCTXT * *pctxt*, ASN1TagType *tagging*)

This function encodes an ASN.1 NULL placeholder.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.16 int berEncStrmObjId (OSCTXT * *pctxt*, const ASN1OBJID * *object_p*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 OBJECT IDENTIFIER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to an object identifier structure. This structure contains an integer to hold the number of subidentifiers in the object and an array to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.17 int berEncStrmObjId64 (OSCTXT * *pctxt*, const ASN1OID64 * *object_p*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 OBJECT IDENTIFIER type using 64-bit subidentifiers.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a 64-bit object identifier structure. This structure contains an integer to hold the number of subidentifiers in the object and an array of 64-bit unsigned integers to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.18 int berEncStrmOctStr (OSCTXT * *pctxt*, const OSOCTET * *object_p*, OSUINT32 *numocts*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 OCTET STRING type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to an OCTET STRING containing the octet data to be encoded.

numocts The number of octets (bytes) within the OCTET STRING to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.19 int berEncStrmOpenTypeExt (OSCTXT * *pctxt*, OSRTDList * *pElemList*)

This function encodes an ASN.1 open type extension. An open type extension is defined as an extensibility marker on a constructed type without any extension elements defined (for example, SEQUENCE { a INTEGER, : }). The difference is that this is an implicit field that can span one or more elements whereas the standard Open Type is assumed to be a single tagged field.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pElemList The pointer to linked list structure. The list will contain elements of ASN1OpenType type.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.20 int berEncStrmReal (OSCTXT * *pctxt*, OSREAL *value*, ASN1TagType *tagging*)

This function encodes a variable of the REAL data type. This function provides support for the plus-infinity and minus-infinity special real values. Use the rtxGetPlusInfinity or rtxGetMinusInfinity functions to get these special values.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

value An OSREAL data type. This is defined to be the C double type. Special real values plus and minus infinity are encoded by using the `rtxGetPlusInfinity` and `rtxGetMinusInfinity` functions to set the real value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.21 `int berEncStrmReal10 (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)`

This function will encode a number from character string to ASN.1 real type using decimal encoding. Number may be represented in integer, decimal, and exponent formats.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.22 `int berEncStrmRelativeOID (OSCTXT *pctxt, const ASN1OBJID *object_p, ASN1TagType tagging)`

This function encodes a variable of the ASN.1 RELATIVE-OID type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to an object identifier structure. This structure contains an integer to hold the number of subidentifiers in the object and an array to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.23 int berEncStrmTag (OSCTXT * *pctxt*, ASN1TAG *tag*)

This function is used to encode the ASN.1 tag field that preface each block of message data. The ASN1C compiler generates calls to this function to handle the encoding of user-defined tags within an ASN.1 specification.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- tag* The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.24 int berEncStrmTagAndIndefLen (OSCTXT * *pctxt*, ASN1TAG *tag*)

This function is used to encode a tag value and an indefinite length. This can be used to manually create an indefinite length wrapper around long or constructed records.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- tag* The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.25 int berEncStrmTagAndLen (OSCTXT * *pctxt*, ASN1TAG *tag*, int *length*)

This function is used to encode the ASN.1 tag and length fields that preface each block of message data. The ASN1C compiler generates calls to this function to handle the encoding of user-defined tags within an ASN.1 specification. This function is also called from within the run-time library functions to handle the addition of the universal tags defined for each of the ASN.1 primitive data types.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- tag* The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.
- length* The length of the contents field. This parameter can be used to specify the actual length, or the special constant 'ASN_K_INDEFLEN' can be used to specify that an indefinite length specification should be encoded.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.26 int berEncStrmUInt (OSCTXT * *pctxt*, OSUINT32 *value*, ASN1TagType *tagging*)

This function encodes an unsigned variable of the ASN.1 INTEGER type.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- value* An unsigned INTEGER value to be encoded. The OSUINT32 type is set to the C type 'unsigned int' in the asn1type.h file. This is assumed to represent a 32-bit integer value.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.27 int berEncStrmUInt16 (OSCTXT * *pctxt*, OSUINT16 *value*, ASN1TagType *tagging*)

This function encodes an unsigned 16-bit variable of the ASN.1 INTEGER type.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- value* An unsigned 16-bit INTEGER value to be encoded. The OSUINT16 type is set to the C type 'unsigned short' in the asn1type.h file. This is assumed to represent a 16-bit integer value.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.28 int berEncStrmUInt64 (OSCTXT * *pctxt*, OSUINT64 *value*, ASN1TagType *tagging*)

This function encodes an unsigned 64-bit variable of the ASN.1 INTEGER type.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- value* An unsigned 64-bit INTEGER value to be encoded. The OSUINT64 type is set to the C type 'unsigned __int64', 'unsigned long long' or 'unsigned long' in the asn1type.h file (depends on the used platform and the compiler). This is assumed to represent a 64-bit integer value.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.29 `int berEncStrmUInt8 (OSCTXT * pctxt, OSUINT8 value, ASN1TagType tagging)`

This function encodes an unsigned 8-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

value An unsigned 8-bit INTEGER value to be encoded. The OSOCTET type is set to the C type 'unsigned char' in the `asn1type.h` file. This is assumed to represent an 8-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.30 `int berEncStrmUnivStr (OSCTXT * pctxt, const Asn132BitCharString * object_p, ASN1TagType tagging)`

This function encodes a variable of the ASN.1 UniversalString type that is based on a 32-bit character sets.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a structure representing a 32-bit character string to be encoded. This structure contains a character count element and a pointer to an array of 32-bit character elements represented as 32-bit unsigned integers.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.31 `int berEncStrmWriteOctet (OSCTXT * pctxt, OSOCTET octet)`

This function puts one octet into the output stream. It is used inside the run-time library or may be used by user to encode indicator of indefinite length (0x80, as defined in ITU-T X.690 standard).

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

octet The octet to be encoded.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.32 `int berEncStrmWriteOctets (OSCTXT * pctxt, const OSOCTET * poctets, size_t numocts)`

This function puts an array of octets into the output stream. It is used inside the run-time library or may be used by user to encode end-of-contents octets (EOC) or open type's content.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- poctets* The array of octets to be encoded.
- numocts* The number of octets in the array.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.33 `int berEncStrmXSDAny (OSCTXT * pctxt, OSXSDAny * pvalue, ASN1TagType tagging)`

This function encodes a variable of the XSD any element wildcard type. It is only used in generated code when and XSD file is compiled. It provides the option to encode the wildcard element as XML text or in binary form if ASN.1 binary encoding rules are being used.

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- pvalue* A pointer to a structure representing an XSD Any (xsd:any) type to be encoded. The structure contains a union of XML text or binary data.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.34 `int cerEncStrmBitStr (OSCTXT * pctxt, const OSOCTET * object_p, OSUINT32 numbits, ASN1TagType tagging)`

This function encodes a variable of the ASN.1 BIT STRING type with using Canonical Encoding Rules (CER).

Parameters

- pctxt* Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.
- object_p* A pointer to an OCTET string containing the bit data to be encoded. This string contains bytes having the actual bit settings as they are to be encoded in the message.
- numbits* The number of bits within the bit string to be encoded.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.35 int cerEncStrmBMPStr (OSCTXT * *pctxt*, const Asn116BitCharString * *object_p*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 BMPString type with using Canonical Encoding Rules (CER). BMP-String type is based on a 16-bit character sets.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a structure representing a 16-bit character string to be encoded. This structure contains a character count element and a pointer to an array of 16-bit character elements represented as 16-bit short integers.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.36 int cerEncStrmCharStr (OSCTXT * *pctxt*, const char * *object_p*, ASN1TagType *tagging*, ASN1TAG *tag*)

This function encodes a variable one of the ASN.1 character string types that are based on 8-bit character sets with using Canonical Encoding Rules (CER). This includes IA5String, VisibleString, PrintableString, and NumericString.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a null-terminated C character string to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

tag The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.37 int cerEncStrmOctStr (OSCTXT * *pctxt*, const OSOCTET * *object_p*, OSUINT32 *numocts*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 OCTET STRING type with using Canonical Encoding Rules (CER).

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to an OCTET STRING containing the octet data to be encoded.

numocts The number of octets (bytes) within the OCTET STRING to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.38 int cerEncStrmReal10 (OSCTXT * *pctxt*, const char * *object_p*, ASN1TagType *tagging*)

This function will encode a number from character string to ASN.1 real type with using CER/DER decimal encoding. Number may be represented in integer, decimal, and exponent formats.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.9.2.39 int cerEncStrmUnivStr (OSCTXT * *pctxt*, const Asn132BitCharString * *object_p*, ASN1TagType *tagging*)

This function encodes a variable of the ASN.1 UniversalString type with using Canonical Encoding Rules (CER). UniversalString type is based on a 32-bit character sets.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p A pointer to a structure representing a 32-bit character string to be encoded. This structure contains a character count element and a pointer to an array of 32-bit character elements represented as 32-bit unsigned integers.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10 C Streaming BER Decode Functions.

Functions

- int [berDecStrmBMPStr](#) (OSCTXT *pctxt, Asn116BitCharString *object_p, ASN1TagType tagging, int length)
- int [berDecStrmBigInt](#) (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, int length)
- int [berDecStrmBigEnum](#) (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, int length)
- int [berDecStrmBitStr](#) (OSCTXT *pctxt, OSOCTET *pvalue, OSUINT32 *pnbits, ASN1TagType tagging, int length)
- int [berDecStrmBool](#) (OSCTXT *pctxt, OSBOOL *object_p, ASN1TagType tagging, int length)
- int [berDecStrmCharStr](#) (OSCTXT *pctxt, const char **ppvalue, ASN1TagType tagging, ASN1TAG tag, int length)
- OSBOOL [berDecStrmCheckEnd](#) (OSCTXT *pctxt, ASN1CCB *pccb)
- int [berDecStrmDynBitStr](#) (OSCTXT *pctxt, const OSOCTET **ppvalue, OSUINT32 *pnbits, ASN1TagType tagging, int length)
- int [berDecStrmDynOctStr](#) (OSCTXT *pctxt, const OSOCTET **ppvalue, OSUINT32 *pnbits, ASN1TagType tagging, int length)
- int [berDecStrmEnum](#) (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmFindTag](#) (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSBOOL advance)
- int [berDecStrmGetTLVLength](#) (OSCTXT *pctxt)
- int [berDecStrmInt](#) (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmInt8](#) (OSCTXT *pctxt, OSINT8 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmInt16](#) (OSCTXT *pctxt, OSINT16 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmInt64](#) (OSCTXT *pctxt, OSINT64 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmLength](#) (OSCTXT *pctxt, int *len_p)
- int [berDecStrmMatchEOC](#) (OSCTXT *pctxt)
- int [berDecStrmMatchTag](#) (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSBOOL advance)
- int [berDecStrmNextElement](#) (OSCTXT *pctxt)
- int [berDecStrmNull](#) (OSCTXT *pctxt, ASN1TagType tagging)
- int [berDecStrmObjId](#) (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging, int length)
- int [berDecStrmObjId64](#) (OSCTXT *pctxt, ASN1OID64 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmOctStr](#) (OSCTXT *pctxt, OSOCTET *pvalue, OSUINT32 *pnbits, ASN1TagType tagging, int length)
- int [berDecStrmOpenType](#) (OSCTXT *pctxt, const OSOCTET **object_p2, OSUINT32 *pnbits)
- int [berDecStrmOpenTypeAppend](#) (OSCTXT *pctxt, OSRTDList *pElemList)
- int [berDecStrmOpenTypeExt](#) (OSCTXT *pctxt, ASN1CCB *ccb_p, ASN1TAG *tags, int tagCount, OSRTDList *pElemList)
- int [berDecStrmPeekTagAndLen](#) (OSCTXT *pctxt, ASN1TAG *ptag, int *plen)
- int [berDecStrmReadDynTLV](#) (OSCTXT *pctxt, OSOCTET **ppbuf)
- int [berDecStrmReadTLV](#) (OSCTXT *pctxt, OSOCTET *buf, size_t bufsiz)
- int [berDecStrmReal](#) (OSCTXT *pctxt, OSREAL *object_p, ASN1TagType tagging, int length)
- int [berDecStrmReal10](#) (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, int length)
- int [berDecStrmRelativeOID](#) (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging, int length)
- int [berDecStrmTag](#) (OSCTXT *pctxt, ASN1TAG *tag_p)
- int [berDecStrmTagAndLen](#) (OSCTXT *pctxt, ASN1TAG *tag_p, int *len_p)
- OSBOOL [berDecStrmTestEOC](#) (OSCTXT *pctxt, ASN1CCB *ccb_p)
- int [berDecStrmTestTag](#) (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSBOOL advance)
- int [berDecStrmUInt](#) (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmUInt8](#) (OSCTXT *pctxt, OSUINT8 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmUInt16](#) (OSCTXT *pctxt, OSUINT16 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmUInt64](#) (OSCTXT *pctxt, OSUINT64 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmUnivStr](#) (OSCTXT *pctxt, Asn132BitCharString *object_p, ASN1TagType tagging, int length)

6.10.1 Detailed Description

The C streaming BER Decode Functions decode ASN.1 primitive data types directly from the input stream. The input stream should be initialized as buffered stream by using `rtxStreamInit` function. It also must be already opened by using any of the following functions: `rtxStreamFileOpen`, `rtxStreamFileAttach`, `rtxStreamSocketAttach`, `rtxStreamMemoryCreate`, `rtxStreamMemoryAttach`.

6.10.2 Function Documentation

6.10.2.1 `int berDecStrmBigInt (OSCTXT * pctxt, const char ** object_p, ASN1TagType tagging, int length)`

This function decodes a variable of the ASN.1 INTEGER type. In this case, the integer is assumed to be of a larger size than can fit in a C or C++ long type (normally 32 or 64 bits). For example, parameters used to calculate security values are typically larger than these sizes.

These variables are stored in character string constant variables. They are represented as hexadecimal strings starting with a "0x" prefix. If it is necessary to convert a hexadecimal string to another radix, then use the `rtxBigIntSetStr / rtxBigIntToString` functions.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a character pointer variable to receive the decoded value. Dynamic memory is allocated for the variable using the `rtxMemAlloc` function. The decoded variable is represented as a hexadecimal string starting with a "0x" prefix.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.2 `int berDecStrmBitStr (OSCTXT * pctxt, OSOCTET * pvalue, OSUINT32 * pnbits, ASN1TagType tagging, int length)`

This function decodes a variable of the ASN.1 BIT STRING type into a static memory structure. This function call is generated by ASN1C to decode a sized bit string production.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pvalue Pointer to a variable to receive the decoded bit string. This is assumed to be a static array large enough to hold the number of bits specified in the *pnbits* input parameter.

pnbits As input parameter it is a pointer to an integer variable containing the size (in bits) of the sized ASN.1 bit string. An error will occur if the number of bits in the decoded string is larger than this value. Note that this is also used as an output variable - the actual number of decoded bits will be returned in this variable.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.3 int berDecStrmBMPStr (OSCTXT * *pctxt*, Asn116BitCharString * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a variable an ASN.1 16-bit character string type. This includes the BMPString type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a structure variable to receive the decoded string. The string is stored as an array of short integer characters. Memory is allocated for the string by the rtxMemAlloc function.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.4 int berDecStrmBool (OSCTXT * *pctxt*, OSBOOL * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a variable of the ASN.1 BOOLEAN type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive the decoded BOOLEAN value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.5 int berDecStrmCharStr (OSCTXT * *pctxt*, const char ** *ppvalue*, ASN1TagType *tagging*, ASN1TAG *tag*, int *length*)

This function decodes a variable of one of the ASN.1 8-bit character string types. These types include IA5String, VisibleString, PrintableString, and NumericString.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

ppvalue Pointer to a character string pointer variable to receive the decoded string. The string is stored as a standard null-terminated C string. Memory is allocated for the string by the `rtxMemAlloc` function.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

tag The ASN.1 tag to be decoded. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer. This parameter only has meaning if the tagging parameter specifies explicit decoding.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.6 OSBOOL berDecStrmCheckEnd (OSCTXT * *pctxt*, ASN1CCB * *pccb*)

This function tests for the end of a constructed context. It is used in loop control statements to determine when a block of repeating elements has ended.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pccb Pointer to a 'context control block' structure. This is basically a loop control mechanism to keep the variable associated with parsing a nested constructed element straight.

Returns

A result of testing:

- TRUE, if end of current context has been reached;
- FALSE, otherwise.

6.10.2.7 int berDecStrmDynBitStr (OSCTXT * *pctxt*, const OSOCTET ** *ppvalue*, OSUINT32 * *pnbits*, ASN1TagType *tagging*, int *length*)

This function decodes a variable of the ASN.1 BIT STRING type. It will allocate dynamic memory to store the decoded result.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

ppvalue Pointer to a pointer variable to receive the decoded bit string. Dynamic memory is allocated to hold the string.

pnbits Pointer to an integer value to receive the decoded number of bits.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.8 int berDecStrmDynOctStr (OSCTXT * *pctxt*, const OSOCTET ** *ppvalue*, OSUINT32 * *pnocts*, ASN1TagType *tagging*, int *length*)

This function decodes a variable of the ASN.1 OCTET STRING type. It will allocate dynamic memory to store the decoded result.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

ppvalue Pointer to a pointer variable to receive the decoded octet string. Dynamic memory is allocated to hold the string.

pnocts Pointer to an integer value to receive the decoded number of octets.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.9 int berDecStrmEnum (OSCTXT * *pctxt*, OSINT32 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a variable of the ASN.1 ENUMERATED type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive the decoded enumerated value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.10 int berDecStrmFindTag (OSCTXT * *pctxt*, ASN1TAG *tag*, int * *len_p*, OSBOOL *advance*)

This function searches the stream being decoded for the first match of the given tag from the current stream position. If the tag is found, the decode stream position will be set to either the start of the tag or to the start of the contents depending on the value of the advance flag. If not found, the stream position will be returned to the position from which the search started.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tag Tag variable to match.

len_p Pointer to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

advance The boolean value indicates the behaviour of the decode pointer. If it is set to TRUE and match is successful, then the pointer will be moved behind the tag. Otherwise, it will be left unchanged.

Returns

Completion status of operation:

- 0 (0) - match is successful;
- RTERR_IDNOTFOU - match is not successful;
- negative value - error occurred.

6.10.2.11 int berDecStrmGetTLVLength (OSCTXT * *pctxt*)

This function returns the length of the tag-length-value at the current position in the stream.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

Returns

Total length (in bytes) of TLV component or negative error code.

6.10.2.12 int berDecStrmInt (OSCTXT * *pctxt*, OSINT32 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive a decoded 32-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.13 int berDecStrmInt16 (OSCTXT * *pctxt*, OSINT16 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a 16-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive a decoded 16-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.14 int berDecStrmInt64 (OSCTXT * *pctxt*, OSINT64 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a 64-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive a decoded 64-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.15 `int berDecStrmInt8 (OSCTXT * pctxt, OSINT8 * object_p, ASN1TagType tagging, int length)`

This function decodes an 8-bit variable of the ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive a decoded 8-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.16 `int berDecStrmLength (OSCTXT * pctxt, int * len_p)`

This function decodes a BER length determinant value.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

len_p Pointer to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.17 `int berDecStrmMatchEOC (OSCTXT * pctxt)`

This function does a comparison between the end-of-contents octets (EOC) and the tag at the current decode pointer position to determine if they match. It then returns the result of the match operation. If match is not successful, the decode pointer will be unchanged; otherwise the pointer will be moved behind the EOC.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

Returns

Completion status of operation:

- 0 (0) - match is successful;
- RTERR_IDNOTFOU - match is not successful;
- negative value - error occurred.

6.10.2.18 `int berDecStrmMatchTag (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSBOOL advance)`

This function does a comparison between the given tag and the tag at the current decode pointer position to determine if they match. It then returns the result of the match operation.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tag Tag variable to match.

len_p Pointer to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

advance The boolean value indicates the behaviour of the decode pointer. If it is set to TRUE and match is successful, then the pointer will be moved behind the tag. Otherwise, it will be left unchanged.

Returns

Completion status of operation:

- 0 (0) - match is successful;
- RTERR_IDNOTFOU - match is not successful;
- negative value - error occurred.

6.10.2.19 `int berDecStrmNextElement (OSCTXT *pctxt)`

This function moves the decode pointer to the next tagged element in the decode stream. It is useful for use in an error handling callback function because it allows an unknown or bogus element to be skipped.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.20 `int berDecStrmNull (OSCTXT *pctxt, ASN1TagType tagging)`

This function decodes an ASN.1 NULL placeholder.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.21 int berDecStrmObjId (OSCTXT * *pctxt*, ASN1OBJID * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a value of the ASN.1 OBJECT IDENTIFIER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to value to receive decoded result. The ASN1OBJID structure contains an integer to hold the number of subidentifiers and an array to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.22 int berDecStrmObjId64 (OSCTXT * *pctxt*, ASN1OID64 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a value of the ASN.1 OBJECT IDENTIFIER type using 64-bit subidentifiers.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to value to receive decoded result. The ASN1OID64 structure contains an integer to hold the number of subidentifiers and an array of 64-bit unsigned integers to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.23 int berDecStrmOctStr (OSCTXT * *pctxt*, OSOCTET * *pvalue*, OSUINT32 * *pnocts*, ASN1TagType *tagging*, int *length*)

This function decodes a variable of the ASN.1 OCTET STRING type into a static memory structure. This function call is generated by ASN1C to decode a sized octet string production.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pvalue Pointer to a variable to receive the decoded octet string. This is assumed to be a static array large enough to hold the number of octets specified in the **pnocts* input parameter.

pnocts Pointer to an integer variable containing the size (in octets) of the sized ASN.1 octet string. An error will occur if the number of octets in the decoded string is larger than this value. Note that this is also used as an output variable - the actual number of decoded octets will be returned in this variable.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.24 `int berDecStrmOpenType (OSCTXT * pctxt, const OSOCTET ** object_p2, OSUINT32 * pnumocts)`

This function decodes a variable of an ASN.1 open type. This includes the now deprecated ANY and ANY DEFINED BY types from the 1990 standard as well as other types defined to be open in the new standards (for example, a variable type declaration in an X.681 Information Object Class definition).

Decoding is accomplished by returning a pointer to the encoded message component at the current decode pointer location and skipping to the next field. The caller must then call additional decode functions to further decode the component.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p2 A pointer to a pointer (**) to hold the address of a byte buffer. This buffer will contain a copy of the encoded message component located at the current decode pointer location.

pnumocts Pointer to an integer value to receive the decoded number of octets.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.25 `int berDecStrmOpenTypeAppend (OSCTXT * pctxt, OSRTDList * pElemList)`

This function is similar to the [berDecStrmOpenType](#). The difference is that after it decodes the open type data into an ASN1OpenType structure, it appends the structure to a doubly-linked list. This function is typically used for decoding extension items in extensible types. The user is provided with a list of each extension item in the message.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

pElemList The pointer to linked list structure. The decoded ASN1OpenType structure will be appended to this list.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.26 **int berDecStrmOpenTypeExt (OSCTXT * *pctxt*, ASN1CCB * *ccb_p*, ASN1TAG * *tags*, int *tagCount*, OSRTDList * *pElemList*)**

This function is similar to the [berDecStrmOpenType](#) function except that it is used in places where open type extensions are specified. An open type extension is defined as an extensibility marker on a constructed type without any extension elements defined (for example, SEQUENCE { a INTEGER, : }). The difference is that this is an implicit field that can span one or more elements whereas the standard Open Type is assumed to be a single tagged field.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

ccb_p Pointer to a 'context control block' structure. This is basically a loop control mechanism to keep the variable associated with parsing a nested constructed element straight.

tags Array of next expected tag values (null if last field). The routine will loop through elements until a matching tag is found or some other error occurs.

tagCount The number of tags in the tags array.

pElemList The pointer to linked list structure. The decoded ASN1OpenType structure will be appended to this list.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.27 **int berDecStrmPeekTagAndLen (OSCTXT * *pctxt*, ASN1TAG * *ptag*, int * *plen*)**

This function "peeks" the tag and length at the current decode pointer location and returns the results. The decode pointer location is left as it was before call to this function.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

ptag Pointer to a variable to receive the decoded ASN.1 tag value.

plen Pointer to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.28 **int berDecStrmReadDynTLV (OSCTXT * *pctxt*, OSOCTET ** *ppbuf*)**

This function reads a complete tag-length-value (TLV) from the decode stream into a dynamic memory buffer.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

ppbuf Pointer to a pointer to a buffer to receive the allocated memory pointer. The memory is allocated using the rtxMem* memory management functions. This may be freed using rtxMemFree or rtxMemFreePtr.

Returns

The total number of octets read into the buffer, or negative error code.

6.10.2.29 `int berDecStrmReadTLV (OSCTXT * pctxt, OSOCTET * buf, size_t bufsiz)`

This function reads a complete tag-length-value (TLV) from the decode stream into the given memory buffer.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

buf Pointer to a buffer to receive a data.

bufsiz Size of the buffer.

Returns

The total number of octets read into the buffer, or negative error code.

6.10.2.30 `int berDecStrmReal (OSCTXT * pctxt, OSREAL * object_p, ASN1TagType tagging, int length)`

This function decodes a variable of the binary encoded ASN.1 REAL type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive the decoded real value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.31 `int berDecStrmReal10 (OSCTXT * pctxt, const char ** object_p, ASN1TagType tagging, int length)`

This function decodes a value of the decimal encoded ASN.1 REAL type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a character pointer variable to receive the decoded result. Dynamic memory is allocated for the variable using the `rtxMemAlloc` function.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.32 int berDecStrmRelativeOID (OSCTXT * *pctxt*, ASN1OBJID * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a value of the ASN.1 RELATIVE-OID type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to value to receive decoded result. The ASN1OBJID structure contains an integer to hold the number of subidentifiers and an array to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.33 int berDecStrmTag (OSCTXT * *pctxt*, ASN1TAG * *tag_p*)

This function decodes the tag at the current decode pointer location and returns the results.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tag_p Pointer to a variable to receive the decoded ASN.1 tag value.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.34 int berDecStrmTagAndLen (OSCTXT * *pctxt*, ASN1TAG * *tag_p*, int * *len_p*)

This function decodes the tag and length at the current decode pointer location and returns the results.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tag_p Pointer to a variable to receive the decoded ASN.1 tag value.

len_p Pointer to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.35 OSBOOL berDecStrmTestEOC (OSCTXT * *pctxt*, ASN1CCB * *ccb_p*)

This function does a quick test on end-of-contents octets at the current decode pointer. In contrast to the [berDecStrmMatchEOC](#) this function never moves the decode pointer and it returns a boolean result of testing.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

ccb_p Pointer to a 'context control block' structure. This is basically a loop control mechanism to keep the variable associated with parsing a nested constructed element straight.

Returns

A result of testing:

- TRUE, if EOC at the current decode pointer;
- FALSE, otherwise.

6.10.2.36 int berDecStrmTestTag (OSCTXT * *pctxt*, ASN1TAG *tag*, int * *len_p*, OSBOOL *advance*)

This function does a comparison between the given tag and the tag at the current decode pointer position to determine if they match. It then returns the result of the match operation. In contrary to the [berDecStrmMatchTag](#) function this one does NOT log error, if tags are not matched.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

tag Tag variable to match.

len_p Pointer to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

advance The boolean value indicates the behaviour of the decode pointer. If it is set to TRUE and match is successful, then the pointer will be moved behind the tag. Otherwise, it will be left unchanged.

Returns

Completion status of operation:

- 0 (0) - match is successful;
- RTERR_IDNOTFOU - match is not successful;
- another negative value - error occurred.

6.10.2.37 int berDecStrmUInt (OSCTXT * *pctxt*, OSUINT32 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a variable of the unsigned variant of ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive a decoded unsigned 32-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.38 int berDecStrmUInt16 (OSCTXT * *pctxt*, OSUINT16 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a 16-bit variable of the unsigned variant of ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive a decoded unsigned 16-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.39 int berDecStrmUInt64 (OSCTXT * *pctxt*, OSUINT64 * *object_p*, ASN1TagType *tagging*, int *length*)

This function decodes a 64-bit variable of the unsigned variant of ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive a decoded unsigned 64-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.40 `int berDecStrmUInt8 (OSCTXT * pctxt, OSUINT8 * object_p, ASN1TagType tagging, int length)`

This function decodes an 8-bit variable of the unsigned variant of ASN.1 INTEGER type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a variable to receive a decoded unsigned 8-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.10.2.41 `int berDecStrmUnivStr (OSCTXT * pctxt, Asn132BitCharString * object_p, ASN1TagType tagging, int length)`

This function decodes a variable an ASN.1 32-bit character UniversalString type.

Parameters

pctxt Pointer to a context structure. This provides a storage area for the function to store all working variables that must be maintained between function calls.

object_p Pointer to a structure variable to receive the decoded string. The string is stored as an array of unsigned integer characters. Memory is allocated for the string by the `rtxMemAlloc` function.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation: 0 (0) = success, negative return value is error.

6.11 C++ classes for streaming BER encoding.

Classes

- class [ASN1BEREncodeStream](#)

6.11.1 Detailed Description

These classes are used to perform BER encoding directly to a stream (file, network, memory).

6.12 C++ classes for streaming BER decoding.

Classes

- class [ASN1BERDecodeStream](#)

6.12.1 Detailed Description

These classes are used to perform BER decoding directly from a stream (file, network, memory).

Chapter 7

Class Documentation

7.1 `_Asn1BufLocDescr` Struct Reference

```
#include <asn1ber.h>
```

Public Attributes

- OSUINT32 `numocts`
- OSINT32 `offset`

7.1.1 Detailed Description

Buffer location descriptor


The documentation for this struct was generated from the following file:

- [asn1ber.h](#)

7.2 ASN1BERDecodeBuffer Class Reference

```
#include <asn1BerCppTypes.h>
```

Inheritance diagram for ASN1BERDecodeBuffer:



Public Member Functions

- [ASN1BERDecodeBuffer](#) ()
- [ASN1BERDecodeBuffer](#) (const OSOCTET *pMsgBuf, size_t msgBufLen)
- [ASN1BERDecodeBuffer](#) (const OSOCTET *pMsgBuf, size_t msgBufLen, OSRTContext *pContext)
- OSOCTET * [findElement](#) (ASN1TAG tag, OSINT32 &elemLen, OSBOOL firstFlag=TRUE)
- virtual const OSOCTET * [getMsgPtr](#) ()
- int [init](#) ()
- virtual OSBOOL [isA](#) (Type bufferType)
- int [parseTagLen](#) (ASN1TAG &tag, int &msglen)
- int [readBinaryFile](#) (const char *filePath)
- int [setBuffer](#) (const OSOCTET *pMsgBuf, size_t msgBufLen)
- OSOCTET * [FindElement](#) (ASN1TAG tag, int &elemLen, int firstFlag=1)
- int [ParseTagLen](#) (ASN1TAG &tag, int &msglen)
- [ASN1BERDecodeBuffer](#) & [operator>>](#) (ASN1CType &val)

Protected Attributes

- const OSOCTET * [mpMsgBuf](#)
- size_t [mMsgBufLen](#)
- OSBOOL [mBufSetFlag](#)

7.2.1 Detailed Description

The [ASN1BERDecodeBuffer](#) class is derived from the [ASN1BERMessageBuffer](#) base class. It contains variables and methods specific to decoding ASN.1 BER/DER messages. It is used to manage the input buffer containing an ASN.1 message to be decoded.

7.2.2 Constructor & Destructor Documentation

7.2.2.1 [ASN1BERDecodeBuffer::ASN1BERDecodeBuffer](#) ()

Default constructor. Use the [getStatus\(\)](#) method to determine if an error occurred during initialization or not.

7.2.2.2 ASN1BERDecodeBuffer::ASN1BERDecodeBuffer (const OSOCTET * pMsgBuf, size_t msgBufLen)

Parameterized constructor. This constructor constructs a buffer describing an encoded ASN.1 message. Parameters describing the message to be decoded are passed as arguments.

Parameters

pMsgBuf A pointer to a buffer containing an encoded ASN.1 message.

msgBufLen Size of the message buffer. This does not have to be equal to the length of the message. The message length can be determined from the outer tag-length-value in the message. This parameter is used to determine if the length of the message is valid; therefore it must be greater than or equal to the actual length. Typically, the size of the buffer the message was read into is passed.

7.2.2.3 ASN1BERDecodeBuffer::ASN1BERDecodeBuffer (const OSOCTET * pMsgBuf, size_t msgBufLen, OSRTContext * pContext)

Parameterized constructor. This constructor constructs a buffer describing an encoded ASN.1 message. Parameters describing the message to be decoded are passed as arguments.

Parameters

pMsgBuf A pointer to a buffer containing an encoded ASN.1 message.

msgBufLen Size of the message buffer. This does not have to be equal to the length of the message. The message length can be determined from the outer tag-length-value in the message. This parameter is used to determine if the length of the message is valid; therefore it must be greater than or equal to the actual length. Typically, the size of the buffer the message was read into is passed.

pContext A pointer to an existing OSRTContext structure.

7.2.3 Member Function Documentation

7.2.3.1 OSOCTET* ASN1BERDecodeBuffer::findElement (ASN1TAG tag, OSINT32 & elemLen, OSBOOL firstFlag = TRUE)

This method finds a tagged element within a message.

Calling Sequence:

```
ptr = decodeBuffer.findElement (tag, elemLen, firstFlag);
```

where decodeBuffer is an [ASN1BERDecodeBuffer](#) object.

Returns

Pointer to tagged component in message or NULL if component not found.

Parameters

tag ASN.1 tag value to search for.

firstFlag Flag indicating if this the first time this search is being done. If true, internal pointers will be set to start the search from the beginning of the message. If false, the search will be resumed from the point at which the last matching tag was found. This makes it possible to find all instances of a particular tagged element within a message

elemLen Reference to an integer value to receive the length of the found element.

7.2.3.2 `virtual const OSOCTET* ASN1BERDecodeBuffer::getMsgPtr () [inline, virtual]`

This method returns the internal pointer to the current message that has been set to be decoded.

Returns

Pointer to message.

7.2.3.3 `int ASN1BERDecodeBuffer::init ()`

Initializes message buffer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

7.2.3.4 `virtual OSBOOL ASN1BERDecodeBuffer::isA (Type bufferType) [inline, virtual]`

This method checks the type of the message buffer.

Parameters

bufferType Enumerated identifier specifying a derived class. The only possible value for this class is BERDecode.

Returns

Boolean result of the match operation. True if this is the class corresponding to the identifier argument.

7.2.3.5 `ASN1BERDecodeBuffer& ASN1BERDecodeBuffer::operator>> (ASN1CType & val)`

This operator decodes an instance of an ASN1CType derived class. Use the getStatus() method to determine if an error occurred during the operation or not.

7.2.3.6 `int ASN1BERDecodeBuffer::parseTagLen (ASN1TAG & tag, int & msglen) [inline]`

This method will parse the initial tag-length pair from the message.

Calling Sequence:

```
stat = decodeBuffer.parseTagLen (tag, msglen);
```

where decodeBuffer is an [ASN1BERDecodeBuffer](#) object.

Returns

Status of the operation. Possible values are 0 if successful or one of the negative error status codes defined in Appendix A of the C/C++ Common Functions Reference Manual.

Parameters

tag Reference to a tag structure to receive the outer level tag value parsed from the message.

msgLen Length of the message. This is the total length of the message obtained by adding the number of bytes in initial tag-length to the parsed length value.

References `xd_setp()`.

7.2.3.7 `int ASN1BERDecodeBuffer::readBinaryFile (const char *filePath)`

This method reads a file containing a single BER/DER/CER encoded data record into the buffer for decoding.

Parameters

filePath The zero-terminated string containing the path to the file.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

7.2.3.8 `int ASN1BERDecodeBuffer::setBuffer (const OSOCTET *pMsgBuf, size_t msgBufLen)`

This method sets a buffer containing a message to be decoded.

Parameters

pMsgBuf A pointer to a memory buffer containing a message to be decoded. The buffer should be declared as an array of unsigned characters (OSOCTETs).

msgBufLen The length of the memory buffer in bytes.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

The documentation for this class was generated from the following file:

- [asn1BerCppType.h](#)

7.3 ASN1BERDecodeStream Class Reference

```
#include <ASN1BERDecodeStream.h>
```

Public Member Functions

- [ASN1BERDecodeStream](#) (OSRTInputStreamIF &is)
- **ASN1BERDecodeStream** (OSRTInputStreamIF *pis, OSBOOL bOwnStream=TRUE)
- virtual void * [getAppInfo](#) ()
- virtual OSRTCtxtPtr [getContext](#) ()
- virtual OSCTXT * [getCtxtPtr](#) ()
- virtual char * [getErrorInfo](#) ()
- virtual char * [getErrorInfo](#) (char *pBuf, size_t &bufSize)
- virtual int [getStatus](#) () const
- virtual void [printErrorInfo](#) ()
- virtual void [resetErrorInfo](#) ()
- virtual void [setAppInfo](#) (void *pAppInfo)
- virtual void [setDiag](#) (OSBOOL value=TRUE)
- virtual int [close](#) ()
- virtual int [flush](#) ()
- virtual int [getPosition](#) (size_t *ppos)
- virtual OSBOOL [isOpen](#) ()
- virtual size_t [currentPos](#) ()
- virtual OSBOOL [markSupported](#) ()
- int [mark](#) (size_t readAheadLimit)
- virtual long [read](#) (OSOCKET *pDestBuf, size_t maxToRead)
- virtual long [readBlocking](#) (OSOCKET *pDestBuf, size_t toReadBytes)
- int [reset](#) ()
- virtual int [setPosition](#) (size_t pos)
- virtual int [skip](#) (size_t n)
- [ASN1BERDecodeStream](#) & [operator>>](#) (ASN1CType &val)
- size_t [byteIndex](#) ()
- OSBOOL [chkend](#) (ASN1CCB &ccb)
- int [decodeBigInt](#) (const char *&pval, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeBitStr](#) (OSOCKET *pbits, OSUINT32 &numbits, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeBitStr](#) (ASN1DynBitStr &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeBMPStr](#) (Asn116BitCharString &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeBool](#) (OSBOOL &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeCharStr](#) (const char *&pval, ASN1TagType tagging=ASN1EXPL, ASN1TAG tag=0, int length=0)
- int [decodeEnum](#) (OSINT32 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeEoc](#) ()
- int [decodeInt](#) (OSINT32 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeInt8](#) (OSINT8 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeInt16](#) (OSINT16 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeInt64](#) (OSINT64 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeLength](#) (OSINT32 &length)
- int [decodeNull](#) (ASN1TagType tagging=ASN1EXPL)
- int [decodeObj](#) (ASN1CType &val)
- int [decodeObjId](#) (ASN1OBJID &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeObjId64](#) (ASN1OID64 &val, ASN1TagType tagging=ASN1EXPL, int length=0)

- int [decodeOctStr](#) (OSOCKET *pocets, OSUINT32 &numocets, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeOctStr](#) (ASN1DynOctStr &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeOpenType](#) (ASN1OpenType &val)
- int [decodeReal](#) (OSREAL &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeRelativeOID](#) (ASN1OBJID &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeTag](#) (ASN1TAG &tag)
- int [decodeTagAndLen](#) (ASN1TAG &tag, OSINT32 &len)
- int [decodeUInt](#) (OSUINT32 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeUInt8](#) (OSUINT8 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeUInt16](#) (OSUINT16 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeUInt64](#) (OSUINT64 &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [decodeUnivStr](#) (Asn132BitCharString &val, ASN1TagType tagging=ASN1EXPL, int length=0)
- int [getTLVLength](#) ()
- OSBOOL [isA](#) (Type bufferType)
- int [peekTagAndLen](#) (ASN1TAG &tag, int &len)
- int [readTLV](#) (OSOCKET *pDestBuf, size_t bufsiz)

Protected Attributes

- OSRTInputStreamIF * **mpStream**
- OSBOOL **mbOwnStream**

7.3.1 Detailed Description

This class is a base class for other ASN.1 BER input stream's classes. It is derived from the ASN1Stream base class. It contains variables and methods specific to streaming decoding of BER messages. It is used to manage the input stream containing the ASN.1 message to be decoded.

7.3.2 Constructor & Destructor Documentation

7.3.2.1 ASN1BERDecodeStream::ASN1BERDecodeStream (OSRTInputStreamIF & *is*)

A default constructor. Use [getStatus\(\)](#) method to determine if an error occurred during the initialization or not.

7.3.3 Member Function Documentation

7.3.3.1 size_t ASN1BERDecodeStream::byteIndex ()

This method returns the total number of octets (bytes) already decoded from the stream.

Returns

Number of octets (bytes) already decoded from the stream.

7.3.3.2 OSBOOL ASN1BERDecodeStream::chkend (ASN1CCB & *ccb*)

This method determines if the decoder has reached the end of a message context block. This method could be called when decoding a SET or SEQUENCE OF/SET OF construct.

Parameters

ccb Reference to a 'context control block' structure. This is basically a loop control mechanism to keep the variable associated with parsing a nested constructed element straight.

Returns

Boolean value indicating whether or not the end-of-context has been reached.

7.3.3.3 virtual int ASN1BERDecodeStream::close () [inline, virtual]

Closes the input or output stream and releases any system resources associated with the stream. For output streams this function also flushes all internal buffers to the stream.

Returns

Completion status of operation:

- 0 = success,
- negative return value is error.

See also

rtxStreamClose

7.3.3.4 virtual size_t ASN1BERDecodeStream::currentPos () [inline, virtual]

This method returns the current position in the stream (in octets).

Returns

The number of octets already read from the stream.

7.3.3.5 int ASN1BERDecodeStream::decodeBigInt (const char *& *pval*, ASN1TagType *tagging* = ASN1EXPL, int *length* = 0)

This method decodes a variable of the ASN.1 INTEGER type. In this case, the integer is assumed to be of a larger size than can fit in a C or C++ long type (normally 32 or 64 bits).

Parameters

pval Reference to a pointer to a variable to receive a decoded big integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmBigInt](#)

7.3.3.6 `int ASN1BERDecodeStream::decodeBitStr (ASN1DynBitStr & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 BIT STRING type. It will allocate dynamic memory to store the decoded result.

Parameters

val Reference to an ASN1DynBitStr variable to receive the decoded bit string.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmDynBitStr](#)

7.3.3.7 `int ASN1BERDecodeStream::decodeBitStr (OSOCKET * pbits, OSUINT32 & numbits, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 BIT STRING type into a static memory structure. It is used to decode a sized bit string production.

Parameters

pbits Pointer to a variable to receive the decoded bit string. This is assumed to be a static array large enough to hold the number of bits specified in the numbits input parameter.

numbits As input parameter it is a reference to an integer variable containing the size (in bits) of the sized ASN.1 bit string. An error will occur if the number of bits in the decoded string is larger than this value. Note that this is also used as an output variable - the actual number of decoded bits will be returned in this variable.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmBitStr](#)

7.3.3.8 `int ASN1BERDecodeStream::decodeBMPStr (Asn116BitCharString & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 BMPString type.

Parameters

val Reference to a variable to receive the decoded BMPString value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmBMPStr](#)

7.3.3.9 `int ASN1BERDecodeStream::decodeBool (OSBOOL & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 BOOLEAN type.

Parameters

val Reference to a variable to receive the decoded boolean value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmBool](#)

7.3.3.10 `int ASN1BERDecodeStream::decodeCharStr (const char *& pval, ASN1TagType tagging = ASN1EXPL, ASN1TAG tag = 0, int length = 0)`

This method decodes a variable of one of the ASN.1 8-bit character string types. These types include IA5String, VisibleString, PrintableString, and NumericString.

Parameters

pval Reference to a character string pointer variable to receive the decoded string. The string is stored as a standard null-terminated C string. Memory is allocated for the string by the `rtxMemAlloc` function.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

tag The ASN.1 tag to be decoded. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer. This parameter only has meaning if the tagging parameter specifies explicit decoding.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmCharStr](#)

7.3.3.11 `int ASN1BERDecodeStream::decodeEnum (OSINT32 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 ENUMERATED type.

Parameters

val Reference to a variable to receive the decoded enumerated value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmEnum](#)

7.3.3.12 int ASN1BERDecodeStream::decodeEoc ()

This method decodes the end-of-contents octets.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmMatchEOC](#)

7.3.3.13 int ASN1BERDecodeStream::decodeInt (OSINT32 & *val*, ASN1TagType *tagging* = ASN1EXPL, int *length* = 0)

This method decodes a variable of the ASN.1 INTEGER type.

Parameters

val Reference to a variable to receive a decoded 32-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmInt](#)

7.3.3.14 `int ASN1BERDecodeStream::decodeInt16 (OSINT16 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a 16-bit variable of the ASN.1 INTEGER type.

Parameters

val Reference to a variable to receive a decoded 16-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmInt16](#)

7.3.3.15 `int ASN1BERDecodeStream::decodeInt64 (OSINT64 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a 64-bit variable of the ASN.1 INTEGER type.

Parameters

val Reference to a variable to receive a decoded 64-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmInt64](#)

7.3.3.16 `int ASN1BERDecodeStream::decodeInt8 (OSINT8 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes an 8-bit variable of the ASN.1 INTEGER type.

Parameters

val Reference to a variable to receive a decoded 8-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmInt8](#)

7.3.3.17 `int ASN1BERDecodeStream::decodeLength (OSINT32 & length)`

This method decodes a BER length determinant value.

Parameters

length Reference to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmLength](#)

7.3.3.18 `int ASN1BERDecodeStream::decodeNull (ASN1TagType tagging = ASN1EXPL)`

This method decodes a variable of the ASN.1 NULL type.

Parameters

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmNull](#)

7.3.3.19 int ASN1BERDecodeStream::decodeObj (ASN1CType & val)

This method decodes an ASN.1 constructed object from the stream.

Parameters

val A reference to an object to be decoded.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

7.3.3.20 int ASN1BERDecodeStream::decodeObjId (ASN1OBJID & val, ASN1TagType tagging = ASN1EXPL, int length = 0)

This method decodes a variable of the ASN.1 OBJECT IDENTIFIER type.

Parameters

val Reference to a variable to receive the decoded OBJECT IDENTIFIER value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmObjId](#)

7.3.3.21 `int ASN1BERDecodeStream::decodeObjId64 (ASN1OID64 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 OBJECT IDENTIFIER type using 64-bit subidentifiers..

Parameters

val Reference to a variable to receive the decoded 64-bit OBJECT IDENTIFIER value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmObjId64](#)

7.3.3.22 `int ASN1BERDecodeStream::decodeOctStr (ASN1DynOctStr & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 OCTET STRING type. It will allocate dynamic memory to store the decoded result.

Parameters

val Reference to an ASN1DynOctStr variable to receive the decoded octet string.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmDynOctStr](#)

7.3.3.23 `int ASN1BERDecodeStream::decodeOctStr (OSOCKET * pocets, OSUINT32 & numocets, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 OCTET STRING type into a static memory structure. It is used to decode a sized octet string production.

Parameters

pocets Pointer to a variable to receive the decoded octet string. This is assumed to be a static array large enough to hold the number of octets specified in the *numocets* input parameter.

numocets Reference to an integer variable containing the size (in octets) of the sized ASN.1 octet string. An error will occur if the number of octets in the decoded string is larger than this value. Note that this is also used as an output variable - the actual number of decoded octets will be returned in this variable.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmOctStr](#)

7.3.3.24 `int ASN1BERDecodeStream::decodeOpenType (ASN1OpenType & val)`

This method decodes an ASN.1 open type value. This is a value of any ASN.1 data type. It may be constructed and contain multiple elements including elements encoded with indefinite lengths. This method will allocate dynamic memory to store the decoded result.

Parameters

val Reference to an ASN1OpenType variable to receive the decoded open type data.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmDynOctStr](#)

7.3.3.25 `int ASN1BERDecodeStream::decodeReal (OSREAL & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 REAL type.

Parameters

val Reference to a variable to receive the decoded REAL value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmReal](#)

7.3.3.26 `int ASN1BERDecodeStream::decodeRelativeOID (ASN1OBJID & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the ASN.1 RELATIVE-OID type.

Parameters

val Reference to a variable to receive the decoded RELATIVE-OID value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmRelativeOID](#)

7.3.3.27 `int ASN1BERDecodeStream::decodeTag (ASN1TAG & tag)`

This method decodes the tag at the current decode pointer location and returns the results.

Parameters

tag Reference to a variable to receive the decoded ASN.1 tag value.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmTag](#)

7.3.3.28 `int ASN1BERDecodeStream::decodeTagAndLen (ASN1TAG & tag, OSINT32 & len)`

This method decodes the tag and length at the current decode pointer location and returns the results.

Parameters

tag Reference to a variable to receive the decoded ASN.1 tag value.

len Reference to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmTagAndLen](#)

7.3.3.29 `int ASN1BERDecodeStream::decodeUInt (OSUINT32 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a variable of the unsigned variant of ASN.1 INTEGER type.

Parameters

val Reference to a variable to receive a decoded unsigned 32-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmUInt](#)

7.3.3.30 `int ASN1BERDecodeStream::decodeUInt16 (OSUINT16 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a 16-bit variable of the unsigned variant of ASN.1 INTEGER type.

Parameters

val Reference to a variable to receive a decoded unsigned 16-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmUInt16](#)

7.3.3.31 `int ASN1BERDecodeStream::decodeUInt64 (OSUINT64 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)`

This method decodes a 64-bit variable of the unsigned variant of ASN.1 INTEGER type.

Parameters

val Reference to a variable to receive a decoded unsigned 64-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmUInt64](#)

7.3.3.32 int ASN1BERDecodeStream::decodeUInt8 (OSUINT8 & val, ASN1TagType tagging = ASN1EXPL, int length = 0)

This method decodes an 8-bit variable of the unsigned variant of ASN.1 INTEGER type.

Parameters

val Reference to a variable to receive a decoded unsigned 8-bit integer value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmUInt8](#)

7.3.3.33 int ASN1BERDecodeStream::decodeUnivStr (Asn132BitCharString & val, ASN1TagType tagging = ASN1EXPL, int length = 0)

This method decodes a variable of the ASN.1 UniversalString type.

Parameters

val Reference to a variable to receive the decoded UniversalString value.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

length The length, in octets, of the contents field to be decoded. This parameter only has meaning if the tagging parameter specifies implicit decoding. If explicit, the length is obtained from the decoded length field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmUnivStr](#)

7.3.3.34 `virtual int ASN1BERDecodeStream::flush () [inline, virtual]`

Flushes the buffered data to the stream.

Returns

Completion status of operation:

- 0 = success,
- negative return value is error.

See also

`rtxStreamFlush`

7.3.3.35 `virtual void* ASN1BERDecodeStream::getAppInfo () [inline, virtual]`

Returns a pointer to application-specific information block

7.3.3.36 `virtual OSRTCtxPtr ASN1BERDecodeStream::getContext () [inline, virtual]`

The `getContext` method returns the underlying context smart-pointer object.

Returns

Context smart pointer object.

7.3.3.37 `virtual OSCTXT* ASN1BERDecodeStream::getCtxtPtr () [inline, virtual]`

The `getCtxtPtr` method returns the underlying C runtime context. This context can be used in calls to C runtime functions.

Returns

The pointer to C runtime context.

7.3.3.38 `virtual char* ASN1BERDecodeStream::getErrorInfo (char * pBuf, size_t & bufSize) [inline, virtual]`

Returns error text in a memory buffer. If buffer pointer is specified in parameters (not NULL) then error text will be copied in the passed buffer. Otherwise, this method allocates memory using the 'operator new []' function. The calling routine is responsible to free the memory by using 'operator delete []'.

Parameters

pBuf A pointer to a destination buffer to obtain the error text. If NULL, dynamic buffer will be allocated.

bufSize A reference to buffer size. If *pBuf* is NULL it will receive the size of allocated dynamic buffer.

Returns

A pointer to a buffer with error text. If *pBuf* is not NULL, the return pointer will be equal to it. Otherwise, returns newly allocated buffer with error text or NULL, if error.

7.3.3.39 `virtual char* ASN1BERDecodeStream::getErrorInfo () [inline, virtual]`

Returns error text in a dynamic memory buffer. The buffer will be allocated by 'operator new []'. The calling routine is responsible to free the memory by using 'operator delete []'.

Returns

A pointer to a newly allocated buffer with error text.

7.3.3.40 `virtual int ASN1BERDecodeStream::getPosition (size_t * ppos) [inline, virtual]`

Returns the current stream position. This may be used with the `setPosition` method to reset back to an arbitrary point in the input stream.

Parameters

ppos Pointer to a variable to receive position.

Returns

Completion status of operation: 0 = success, negative return value is error.

7.3.3.41 `virtual int ASN1BERDecodeStream::getStatus () const [inline, virtual]`

This method returns the completion status of previous operation. It can be used to check completion status of constructors or methods, which do not return completion status. If error occurs, use `printErrorInfo` method to print out the error's description and stack trace. Method `resetError` can be used to reset error to continue operations after recovering from the error.

Returns

Runtime status code:

- 0 (0) = success,
- negative return value is error.

7.3.3.42 `int ASN1BERDecodeStream::getTLVLength ()`

Get the total length of a tag-length-value (TLV) component. This is not the length stored in the L field. It is the total length of the component which is equal to the parsed length plus the number of bytes in the tag and length fields.

Returns

The total number of octets in the TLV or a negative error code.

See also

[berDecStrmGetTLVLength](#)

7.3.3.43 OSBOOL ASN1BERDecodeStream::isA (Type *bufferType*)

This method matches an enumerated identifier defined in the base class. One identifier is declared for each of the derived classes.

Parameters

bufferType Enumerated identifier specifying a derived class. This type is defined as a public access type in the ASN1MessageBufferIF base interface. Possible values are: BEREncode, BERDecode, PEREncode, PERDecode, XEREncode, XERDecode, XMLEncode, XMLDecode, Stream.

Returns

Boolean result of the match operation. True if this is the class corresponding to the identifier argument.

7.3.3.44 virtual OSBOOL ASN1BERDecodeStream::isOpen () [inline, virtual]

Checks, is the stream opened or not.

Returns

TRUE, if the stream is opened, FALSE otherwise.

See also

rtxStreamIsOpened

7.3.3.45 int ASN1BERDecodeStream::mark (size_t *readAheadLimit*) [inline]

This method marks the current position in this input stream. A subsequent call to the [ASN1BERDecodeStream::reset](#) method repositions this stream at the last marked position so that subsequent reads re-read the same bytes. The *readAheadLimit* argument tells this input stream to allow that many bytes to be read before the mark position gets invalidated.

Parameters

readAheadLimit the maximum limit of bytes that can be read before the mark position becomes invalid.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

rtxStreamBufMark, rtxStreamBufReset

7.3.3.46 virtual OSBOOL ASN1BERDecodeStream::markSupported () [inline, virtual]

Tests if this input stream supports the mark and reset methods. Whether or not mark and reset are supported is an invariant property of a particular input stream instance. By default, it returns FALSE.

Returns

TRUE if this stream instance supports the mark and reset methods; FALSE otherwise.

See also

`rtxStreamIsMarkSupported`

7.3.3.47 `ASN1BERDecodeStream& ASN1BERDecodeStream::operator>> (ASN1CType & val)`

Decodes an ASN.1 constructed object from the stream. Use `getStatus()` method to determine if an error occurred during the operation or not.

Parameters

val A reference to an object to be decoded.

Returns

reference to this class to perform sequential decoding.

7.3.3.48 `int ASN1BERDecodeStream::peekTagAndLen (ASN1TAG & tag, int & len)`

This method "peeks" the tag and length at the current decode pointer location and returns the results. The decode pointer location is left as it was before call to this function.

Parameters

tag Reference to a variable to receive the decoded ASN.1 tag value.

len Reference to a variable to receive the decoded length of the tagged component. The returned value will either be the actual length or the special constant 'ASN_K_INDEFLEN', which indicates indefinite length.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berDecStrmTagAndLen](#)

7.3.3.49 `virtual void ASN1BERDecodeStream::printErrorInfo () [inline, virtual]`

The `printErrorInfo` method prints information on errors contained within the context.

7.3.3.50 `virtual long ASN1BERDecodeStream::read (OSOCKET * pDestBuf, size_t maxToRead) [inline, virtual]`

Read data from the stream. This method reads up to `maxToRead` bytes from the stream. It may return a value less than this if the maximum number of bytes is not available.

Parameters

pDestBuf Pointer to a buffer to receive a data.

maxToRead Size of the buffer.

Returns

The total number of octets read into the buffer, or negative value with error code if any error is occurred.

See also

[rtxStreamRead](#)

7.3.3.51 virtual long ASN1BERDecodeStream::readBlocking (OSOCKET * pDestBuf, size_t toReadBytes) [inline, virtual]

Read data from the stream. This method reads `maxToRead` bytes from the stream. It will block until either the bytes are available or an error occurs.

Parameters

pDestBuf Pointer to a buffer to receive a data.

toReadBytes Number of bytes to be read.

Returns

The total number of octets read into the buffer, or negative error code.

See also

[rtxStreamReadBlocking](#)

7.3.3.52 int ASN1BERDecodeStream::readTLV (OSOCKET * pDestBuf, size_t bufsiz)

Read a complete tag-length-value (TLV) from the decode stream into the given memory buffer.

Parameters

pDestBuf Pointer to a buffer to receive a data.

bufsiz Size of the buffer.

Returns

The total number of octets read into the buffer, or negative error code.

See also

[berDecStrmReadTLV](#)

7.3.3.53 `int ASN1BERDecodeStream::reset () [inline]`

Repositions this stream to the position at the time the mark method was last called on this input stream.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

`rtxStreamBufMark`, `rtxStreamBufReset`

7.3.3.54 `virtual void ASN1BERDecodeStream::resetErrorInfo () [inline, virtual]`

The `resetErrorInfo` method resets information on errors contained within the context.

7.3.3.55 `virtual void ASN1BERDecodeStream::setAppInfo (void * pAppInfo) [inline, virtual]`

Sets the application-specific information block.

7.3.3.56 `virtual void ASN1BERDecodeStream::setDiag (OSBOOL value = TRUE) [inline, virtual]`

The `setDiag` method will turn diagnostic tracing on or off.

Parameters

value - Boolean value (default = TRUE = on)

7.3.3.57 `virtual int ASN1BERDecodeStream::setPosition (size_t pos) [inline, virtual]`

Sets the current stream position to the given offset.

Parameters

pos Position stream is to be reset to. This is normally obtained via a call to `getPosition`, although in most cases it is a zero-based offset.

Returns

Completion status of operation: 0 = success, negative return value is error.

7.3.3.58 `virtual int ASN1BERDecodeStream::skip (size_t n) [inline, virtual]`

Skips over and discards the specified amount of data octets from this input stream.

Parameters

n The number of octets to be skipped.

Returns

Completion status of operation:

- 0 = success,
- negative return value is error.

See also

`rtxStreamSkip`


The documentation for this class was generated from the following file:

- [ASN1BERDecodeStream.h](#)

7.4 ASN1BEREncodeBuffer Class Reference

```
#include <asn1BerCppTypes.h>
```

Inheritance diagram for ASN1BEREncodeBuffer:



Public Member Functions

- [ASN1BEREncodeBuffer](#) ()
- [ASN1BEREncodeBuffer](#) (OSOCKETET *pMsgBuf, size_t msgBufLen)
- [ASN1BEREncodeBuffer](#) (OSOCKETET *pMsgBuf, size_t msgBufLen, OSRTContext *pContext)
- void [freeBuffer](#) ()
- virtual OSOCKETET * [getMsgCopy](#) ()
- virtual const OSOCKETET * [getMsgPtr](#) ()
- int [init](#) ()
- virtual OSBOOL [isA](#) (Type bufferType)
- int [setBuffer](#) (OSOCKETET *pMsgBuf, size_t msgBufLen)
- [ASN1BEREncodeBuffer](#) & [operator<<](#) (ASN1CType &val)

7.4.1 Detailed Description

The ASN1BEREncodeBuffer class is derived from the [ASN1BERMessageBuffer](#) base class. It contains variables and methods specific to encoding ASN.1 messages using the Basic Encoding Rules (BER). It is used to manage the buffer into which an ASN.1 message is to be encoded.

7.4.2 Constructor & Destructor Documentation

7.4.2.1 ASN1BEREncodeBuffer::ASN1BEREncodeBuffer ()

Default constructor. This sets all internal variables to their initial values. Use the [getStatus\(\)](#) method to determine if an error occurred during initialization or not.

7.4.2.2 ASN1BEREncodeBuffer::ASN1BEREncodeBuffer (OSOCKETET *pMsgBuf, size_t msgBufLen)

Parameterized constructor. This version takes a message buffer and size argument (static encoding version). Use the [getStatus\(\)](#) method to determine if an error occurred during initialization or not.

Parameters

pMsgBuf A pointer to a fixed size message buffer to receive the encoded message.

msgBufLen Size of the fixed-size message buffer.

7.4.2.3 ASN1BEREncodeBuffer::ASN1BEREncodeBuffer (OSOCKET * *pMsgBuf*, size_t *msgBufLen*, OSRTContext * *pContext*)

Parameterized constructor. This version takes a message buffer, a size argument (static encoding version), and a context. Use the getStatus() method to determine if an error occurred during initialization or not.

Parameters

pMsgBuf A pointer to a fixed size message buffer to receive the encoded message.

msgBufLen Size of the fixed-size message buffer.

pContext A pointer to an existing OSRTContext structure.

7.4.3 Member Function Documentation

7.4.3.1 void ASN1BEREncodeBuffer::freeBuffer () [inline]

This method releases memory that was allocated for a dynamic encode buffer.

References `xe_free()`.

7.4.3.2 virtual OSOCKET* ASN1BEREncodeBuffer::getMsgCopy () [virtual]

This method returns a copy of the current encoded message. Memory is allocated for the message using the 'new []' operation. It is the user's responsibility to free the memory using 'delete []'.

Calling Sequence:

```
ptr = encodeBuffer.getMsgCopy ();
```

where `encodeBuffer` is an [ASN1BEREncodeBuffer](#) object.

Returns

Pointer to copy of encoded message. It is the user's responsibility to free the memory using 'delete []' (i.e., `delete [] ptr;`).

7.4.3.3 virtual const OSOCKET* ASN1BEREncodeBuffer::getMsgPtr () [virtual]

This method returns the internal pointer to the current encoded message. Calling Sequence:

```
ptr = encodeBuffer.getMsgPtr ();
```

where `encodeBuffer` is an [ASN1BEREncodeBuffer](#) object.

Returns

Pointer to encoded message.

7.4.3.4 int ASN1BEREncodeBuffer::init ()

This method reinitializes the encode buffer pointer to allow a new message to be encoded. This makes it possible to reuse one message buffer object in a loop to encode multiple messages. After this method is called, any previously encoded message in the buffer will be overwritten on the next encode call.

Calling Sequence:

```
encodeBuffer.init ();
```

where encodeBuffer is an [ASN1BEREncodeBuffer](#) object.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

7.4.3.5 virtual OSBOOL ASN1BEREncodeBuffer::isA (Type *bufferType*) [inline, virtual]

This method checks the type of the message buffer.

Parameters

bufferType Enumerated identifier specifying a derived class. The only possible value for this class is BEREncode.

Returns

Boolean result of the match operation. True if this is the class corresponding to the identifier argument.

7.4.3.6 ASN1BEREncodeBuffer& ASN1BEREncodeBuffer::operator<< (ASN1CType & *val*)

This operator encodes instance of ASN1CType derived class. Use getStatus() method to determine has error occurred during the operation or not.

7.4.3.7 int ASN1BEREncodeBuffer::setBuffer (OSOCKET * *pMsgBuf*, size_t *msgBufLen*)

This method sets a buffer to receive the encoded message.

Parameters

pMsgBuf A pointer to a memory buffer to use to encode a message. The buffer should be declared as an array of unsigned characters (OSOCKETs). This parameter can be set to NULL to specify dynamic encoding (i.e., the encode functions will dynamically allocate a buffer for the message).

msgBufLen The length of the memory buffer in bytes. If *pMsgBuf* is NULL, this parameter specifies the initial size of the dynamic buffer; if 0 - the default size will be used.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

The documentation for this class was generated from the following file:

- [asn1BerCppType.h](#)

7.5 ASN1BEREncodeStream Class Reference

```
#include <ASN1BEREncodeStream.h>
```

Public Member Functions

- [ASN1BEREncodeStream](#) (OSRTOutputStreamIF &os)
- **ASN1BEREncodeStream** (OSRTOutputStreamIF *pos, OSBOOL bOwnStream=TRUE)
- virtual void * [getAppInfo](#) ()
- virtual OSRTCtxtPtr [getContext](#) ()
- virtual OSCTXT * [getCtxtPtr](#) ()
- virtual char * [getErrorInfo](#) ()
- virtual char * [getErrorInfo](#) (char *pBuf, size_t &bufSize)
- virtual int [getStatus](#) () const
- virtual void [printErrorInfo](#) ()
- virtual void [resetErrorInfo](#) ()
- virtual void [setAppInfo](#) (void *pAppInfo)
- virtual void [setDiag](#) (OSBOOL value=TRUE)
- virtual int [close](#) ()
- virtual int [flush](#) ()
- virtual OSBOOL [isOpened](#) ()
- virtual long [write](#) (const OSOCTET *pdata, size_t size)
- [ASN1BEREncodeStream](#) & [operator<<](#) (ASN1CType &val)
- int [encodeBMPStr](#) (const Asn116BitCharString &val, ASN1TagType tagging=ASN1EXPL)
- int [encodeBigInt](#) (const char *pval, ASN1TagType tagging=ASN1EXPL)
- int [encodeBigIntNchars](#) (const char *pval, size_t nchars, ASN1TagType tagging=ASN1EXPL)
- int [encodeBitStr](#) (const OSOCTET *pbits, OSUINT32 numbits, ASN1TagType tagging=ASN1EXPL)
- int [encodeBitStr](#) (const ASN1DynBitStr &val, ASN1TagType tagging=ASN1EXPL)
- int [encodeBool](#) (OSBOOL val, ASN1TagType tagging=ASN1EXPL)
- int [encodeCharStr](#) (const char *pval, ASN1TagType tagging=ASN1EXPL, ASN1TAG tag=0)
- int [encodeEnum](#) (OSINT32 val, ASN1TagType tagging=ASN1EXPL)
- int [encodeEoc](#) ()
- int [encodeIndefLen](#) ()
- int [encodeInt](#) (OSINT32 val, ASN1TagType tagging=ASN1EXPL)
- int [encodeInt8](#) (OSINT8 val, ASN1TagType tagging=ASN1EXPL)
- int [encodeInt16](#) (OSINT16 val, ASN1TagType tagging=ASN1EXPL)
- int [encodeInt64](#) (OSINT64 val, ASN1TagType tagging=ASN1EXPL)
- int [encodeLen](#) (size_t len)
- int [encodeNull](#) (ASN1TagType tagging=ASN1EXPL)
- int [encodeObj](#) (ASN1CType &val)
- int [encodeObjId](#) (const ASN1OBJID &val, ASN1TagType tagging=ASN1EXPL)
- int [encodeObjId64](#) (const ASN1OID64 &val, ASN1TagType tagging=ASN1EXPL)
- int [encodeOctStr](#) (const OSOCTET *pocets, OSUINT32 numocets, ASN1TagType tagging=ASN1EXPL)
- int [encodeOctStr](#) (const ASN1DynOctStr &val, ASN1TagType tagging=ASN1EXPL)
- int [encodeReal](#) (OSREAL val, ASN1TagType tagging=ASN1EXPL)
- int [encodeRelativeOID](#) (const ASN1OBJID &val, ASN1TagType tagging=ASN1EXPL)
- int [encodeTag](#) (ASN1TAG tag)
- int [encodeTagAndIndefLen](#) (ASN1TAG tag)
- int [encodeTagAndLen](#) (ASN1TAG tag, OSINT32 len)
- int [encodeUInt](#) (OSUINT32 val, ASN1TagType tagging=ASN1EXPL)

- int `encodeUInt8` (OSUINT8 val, ASN1TagType tagging=ASN1EXPL)
- int `encodeUInt16` (OSUINT16 val, ASN1TagType tagging=ASN1EXPL)
- int `encodeUInt64` (OSUINT64 val, ASN1TagType tagging=ASN1EXPL)
- int `encodeUnivStr` (const Asn132BitCharString &val, ASN1TagType tagging=ASN1EXPL)
- OSBOOL `isA` (Type bufferType)

Protected Attributes

- OSRTOutputStreamIF * `mpStream`
- OSBOOL `mbOwnStream`

7.5.1 Detailed Description

This class is a base class for other ASN.1 BER output stream's classes. It is derived from the ASN1Stream base class. It contains variables and methods specific to streaming encoding of BER messages.

7.5.2 Constructor & Destructor Documentation

7.5.2.1 ASN1BEREncodeStream::ASN1BEREncodeStream (OSRTOutputStreamIF & os)

A default constructor. Use `getStatus()` method to determine has error occurred during the initialization or not.

7.5.3 Member Function Documentation

7.5.3.1 virtual int ASN1BEREncodeStream::close () [inline, virtual]

Closes the input or output stream and releases any system resources associated with the stream. For output streams this function also flushes all internal buffers to the stream.

Returns

Completion status of operation:

- 0 = success,
- negative return value is error.

See also

`rtxStreamClose`

7.5.3.2 int ASN1BEREncodeStream::encodeBigInt (const char * pval, ASN1TagType tagging = ASN1EXPL)

This method encodes a variable of the ASN.1 INTEGER type. In this case, the integer is assumed to be of a larger size than can fit in a C or C++ long type (normally 32 or 64 bits).

Parameters

**pval* A pointer to a character string containing the value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmBigInt](#)

7.5.3.3 int ASN1BEREncodeStream::encodeBigIntNchars (const char * *pval*, size_t *nchars*, ASN1TagType *tagging* = ASN1EXPL)

This method encodes a variable of the ASN.1 INTEGER type. In this case, the integer is assumed to be of a larger size than can fit in a C or C++ long type (normally 32 or 64 bits).

Parameters

**pval* A pointer to a character string containing the value to be encoded.

nchars Number of characters from *pval* to encode.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmBigInt](#)

7.5.3.4 int ASN1BEREncodeStream::encodeBitStr (const ASN1DynBitStr & *val*, ASN1TagType *tagging* = ASN1EXPL)

This method encodes a variable of the ASN.1 BIT STRING type.

Parameters

val A reference to the ASN1DynBitStr structure containing a bit data and number of bits to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmBitStr](#)

7.5.3.5 `int ASN1BEREncodeStream::encodeBitStr (const OSOCTET * pbits, OSUINT32 numbits, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 BIT STRING type.

Parameters

pbits A pointer to an OCTET string containing the bit data to be encoded. This string contains bytes having the actual bit settings as they are to be encoded in the message.

numbits The number of bits within the bit string to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmBitStr](#)

7.5.3.6 `int ASN1BEREncodeStream::encodeBMPStr (const Asn116BitCharString & val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 BMPString type that is based on a 16-bit character sets.

Parameters

val A reference to a structure representing a 16-bit character string to be encoded. This structure contains a character count element and a pointer to an array of 16-bit character elements represented as 16-bit short integers.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmBMPStr](#)

7.5.3.7 `int ASN1BEREncodeStream::encodeBool (OSBOOL val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 BOOLEAN type.

Parameters

val A BOOLEAN value to be encoded. A BOOLEAN is defined as a single OCTET whose value is 0 for FALSE and any other value for TRUE.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmBool](#)

7.5.3.8 `int ASN1BEREncodeStream::encodeCharStr (const char * pval, ASN1TagType tagging = ASN1EXPL, ASN1TAG tag = 0)`

This method encodes a variable of the ASN.1 character string type.

Parameters

pval A pointer to a null-terminated C character string to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

tag The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmCharStr](#)

7.5.3.9 `int ASN1BEREncodeStream::encodeEnum (OSINT32 val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 ENUMERATED type. The enumerated encoding is identical to that of an integer. The compiler adds additional checks to the generated code to ensure the value is within the given set.

Parameters

val An integer containing the enumerated value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmEnum](#)

7.5.3.10 int ASN1BEREncodeStream::encodeEoc ()

This method encodes end-of-contents octets (EOC) into the stream. EOC is two zero octets (it is documented in the X.690 standard). This method must be called when the encoding of the complex type with indefinite length is finishing.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmEOC](#), [berEncStrmTagAndIndefLen](#),

7.5.3.11 int ASN1BEREncodeStream::encodeIndefLen ()

This method is used to encode the indefinite length indicator. This can be used to manually create an indefinite length wrapper around long or constructed records.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmWriteOctet](#)

7.5.3.12 `int ASN1BEREncodeStream::encodeInt (OSINT32 val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 INTEGER type.

Parameters

val A 32-bit INTEGER value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmInt](#)

7.5.3.13 `int ASN1BEREncodeStream::encodeInt16 (OSINT16 val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a 16-bit variable of the ASN.1 INTEGER type.

Parameters

val A 16-bit INTEGER value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmInt16](#)

7.5.3.14 `int ASN1BEREncodeStream::encodeInt64 (OSINT64 val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a 64-bit variable of the ASN.1 INTEGER type.

Parameters

val A 64-bit INTEGER value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmInt64](#)

7.5.3.15 int ASN1BEREncodeStream::encodeInt8 (OSINT8 *val*, ASN1TagType *tagging* = ASN1EXPL)

This method encodes an 8-bit variable of the ASN.1 INTEGER type.

Parameters

val An 8-bit INTEGER value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmInt8](#)

7.5.3.16 int ASN1BEREncodeStream::encodeLen (size_t *len*)

This method is used to encode a length in BER format.

Parameters

len The length of the contents field.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmLength](#)

7.5.3.17 int ASN1BEREncodeStream::encodeNull (ASN1TagType *tagging* = ASN1EXPL)

This method encodes a variable of the ASN.1 NULL type.

Parameters

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmRelativeOID](#)

7.5.3.18 int ASN1BEREncodeStream::encodeObj (ASN1CType & *val*)

This method encodes an ASN.1 constructed object to the stream.

Parameters

val A reference to an object to be encoded.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

7.5.3.19 int ASN1BEREncodeStream::encodeObjId (const ASN1OBJID & *val*, ASN1TagType *tagging* = ASN1EXPL)

This method encodes a variable of the ASN.1 OBJECT IDENTIFIER type.

Parameters

val A reference to an object identifier structure. This structure contains an integer to hold the number of subidentifiers in the object and an array to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmObjId](#)

7.5.3.20 `int ASN1BEREncodeStream::encodeObjId64 (const ASN1OID64 & val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 OBJECT IDENTIFIER type using 64-bit subidentifiers.

Parameters

val A reference to a 64-bit object identifier structure. This structure contains an integer to hold the number of subidentifiers in the object and an array of 64-bit unsigned integers to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmObjId64](#)

7.5.3.21 `int ASN1BEREncodeStream::encodeOctStr (const ASN1DynOctStr & val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 OCTET STRING type.

Parameters

val A reference to the ASN1DynOctStr structure containing an octet data and number of octets to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmOctStr](#)

7.5.3.22 `int ASN1BEREncodeStream::encodeOctStr (const OSOCTET * pocts, OSUINT32 numocts, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 OCTET STRING type.

Parameters

pocts A pointer to an OCTET STRING containing the octet data to be encoded.

numocts The number of octets (bytes) within the OCTET STRING to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmOctStr](#)

7.5.3.23 int ASN1BEREncodeStream::encodeReal (OSREAL *val*, ASN1TagType *tagging* = ASN1EXPL)

This method encodes a variable of the REAL data type. It provides support for the plus-infinity and minus-infinity special real values. Use the rtxGetPlusInfinity or rtxGetMinusInfinity functions to get these special values.

Parameters

val An OSREAL data type. This is defined to be the C double type. Special real values plus and minus infinity are encoded by using the rtxGetPlusInfinity and rtxGetMinusInfinity functions to set the real value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmReal](#)

7.5.3.24 int ASN1BEREncodeStream::encodeRelativeOID (const ASN1OBJID & *val*, ASN1TagType *tagging* = ASN1EXPL)

This method encodes a variable of the ASN.1 RELATIVE-OID type.

Parameters

val A reference to an object identifier structure. This structure contains an integer to hold the number of subidentifiers in the object and an array to hold the subidentifier values.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmRelativeOID](#)

7.5.3.25 int ASN1BEREncodeStream::encodeTag (ASN1TAG *tag*)

This method is used to encode the ASN.1 tag field that preface each block of message data. The ASN1C compiler generates calls to this function to handle the encoding of user-defined tags within an ASN.1 specification.

Parameters

tag The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmTag](#)

7.5.3.26 int ASN1BEREncodeStream::encodeTagAndIndefLen (ASN1TAG *tag*)

This method is used to encode a tag value and an indefinite length. This can be used to manually create an indefinite length wrapper around long or constructed records.

Parameters

tag The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmTagAndIndefLen](#)

7.5.3.27 `int ASN1BEREncodeStream::encodeTagAndLen (ASN1TAG tag, OSINT32 len)`

This method is used to encode the ASN.1 tag and length fields that preface each block of message data.

Parameters

- tag* The ASN.1 tag to be encoded in the message. This parameter is passed using the ASN1C internal tag representation. It is passed as an unsigned 32-bit integer.
- len* The length of the contents field. This parameter can be used to specify the actual length, or the special constant 'ASN_K_INDEFLEN' can be used to specify that an indefinite length specification should be encoded.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmTagAndLen](#)

7.5.3.28 `int ASN1BEREncodeStream::encodeUInt (OSUINT32 val, ASN1TagType tagging = ASN1EXPL)`

This method encodes an unsigned variable of the ASN.1 INTEGER type.

Parameters

- val* An unsigned INTEGER value to be encoded.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmUInt](#)

7.5.3.29 `int ASN1BEREncodeStream::encodeUInt16 (OSUINT16 val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a 16-bit unsigned variable of the ASN.1 INTEGER type.

Parameters

- val* A 16-bit unsigned INTEGER value to be encoded.
- tagging* An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmUInt16](#)

7.5.3.30 `int ASN1BEREncodeStream::encodeUInt64 (OSUINT64 val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a 64-bit unsigned variable of the ASN.1 INTEGER type.

Parameters

val A 64-bit unsigned INTEGER value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmUInt64](#)

7.5.3.31 `int ASN1BEREncodeStream::encodeUInt8 (OSUINT8 val, ASN1TagType tagging = ASN1EXPL)`

This method encodes an 8-bit unsigned variable of the ASN.1 INTEGER type.

Parameters

val An 8-bit unsigned INTEGER value to be encoded.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmUInt8](#)

7.5.3.32 `int ASN1BEREncodeStream::encodeUnivStr (const Asn132BitCharString & val, ASN1TagType tagging = ASN1EXPL)`

This method encodes a variable of the ASN.1 UniversalString type that is based on a 32-bit character sets.

Parameters

val A reference to a structure representing a 32-bit character string to be encoded. This structure contains a character count element and a pointer to an array of 32-bit character elements represented as 32-bit unsigned integers.

tagging An enumerated type whose value is set to either 'ASN1EXPL' (for explicit tagging) or 'ASN1IMPL' (for implicit). Controls whether the universal tag value for this type is added or not. Users will generally always set this value to 'ASN1EXPL'.

Returns

Completion status of operation:

- 0 (0) = success,
- negative return value is error.

See also

[berEncStrmUnivStr](#)

7.5.3.33 `virtual int ASN1BEREncodeStream::flush () [inline, virtual]`

Flushes the buffered data to the stream.

Returns

Completion status of operation:

- 0 = success,
- negative return value is error.

See also

[rtxStreamFlush](#)

7.5.3.34 `virtual void* ASN1BEREncodeStream::getAppInfo () [inline, virtual]`

Returns a pointer to application-specific information block

7.5.3.35 `virtual OSRTCtxtPtr ASN1BEREncodeStream::getContext () [inline, virtual]`

The getContext method returns the underlying context smart-pointer object.

Returns

Context smart pointer object.

7.5.3.36 **virtual OSCTXT* ASN1BEREncodeStream::getCtxtPtr () [inline, virtual]**

The `getCtxtPtr` method returns the underlying C runtime context. This context can be used in calls to C runtime functions.

Returns

The pointer to C runtime context.

7.5.3.37 **virtual char* ASN1BEREncodeStream::getErrorInfo (char * pBuf, size_t & bufSize) [inline, virtual]**

Returns error text in a memory buffer. If buffer pointer is specified in parameters (not NULL) then error text will be copied in the passed buffer. Otherwise, this method allocates memory using the 'operator new []' function. The calling routine is responsible to free the memory by using 'operator delete []'.

Parameters

pBuf A pointer to a destination buffer to obtain the error text. If NULL, dynamic buffer will be allocated.

bufSize A reference to buffer size. If *pBuf* is NULL it will receive the size of allocated dynamic buffer.

Returns

A pointer to a buffer with error text. If *pBuf* is not NULL, the return pointer will be equal to it. Otherwise, returns newly allocated buffer with error text. NULL, if error occurred.

7.5.3.38 **virtual char* ASN1BEREncodeStream::getErrorInfo () [inline, virtual]**

Returns error text in a dynamic memory buffer. Buffer will be allocated by 'operator new []'. The calling routine is responsible to free the memory by using 'operator delete []'.

Returns

A pointer to a newly allocated buffer with error text.

7.5.3.39 **virtual int ASN1BEREncodeStream::getStatus () const [inline, virtual]**

This method returns the completion status of previous operation. It can be used to check completion status of constructors or methods, which do not return completion status. If error occurs, use `printErrorInfo` method to print out the error's description and stack trace. Method `resetError` can be used to reset error to continue operations after recovering from the error.

Returns

Runtime status code:

- 0 (0) = success,
- negative return value is error.

7.5.3.40 OSBOOL ASN1BEREncodeStream::isA (Type *bufferType*)

This method matches an enumerated identifier defined in the base class. One identifier is declared for each of the derived classes.

Parameters

bufferType Enumerated identifier specifying a derived class. This type is defined as a public access type in the ASN1MessageBufferIF base interface. Possible values are: BEREncode, BERDecode, PEREncode, PERDecode, XEREncode, XERDecode, XMLEncode, XMLDecode, Stream.

Returns

Boolean result of the match operation. True if this is the class corresponding to the identifier argument.

7.5.3.41 virtual OSBOOL ASN1BEREncodeStream::isOpened () [inline, virtual]

Checks, is the stream opened or not.

Returns

TRUE, if the stream is opened, FALSE otherwise.

See also

rtxStreamIsOpened

7.5.3.42 ASN1BEREncodeStream& ASN1BEREncodeStream::operator<< (ASN1CType & *val*)

Encodes an ASN.1 constructed object to the stream. Use [getStatus\(\)](#) method to determine has error occurred during the operation or not.

Parameters

val A reference to an object to be encoded.

Returns

reference to this class to perform sequential encoding.

7.5.3.43 virtual void ASN1BEREncodeStream::printErrorInfo () [inline, virtual]

The printErrorInfo method prints information on errors contained within the context.

7.5.3.44 virtual void ASN1BEREncodeStream::resetErrorInfo () [inline, virtual]

The resetErrorInfo method resets information on errors contained within the context.

7.5.3.45 virtual void ASN1BEREncodeStream::setAppInfo (void * *pAppInfo*) [inline, virtual]

Sets the application-specific information block.

7.5.3.46 virtual void ASN1BEREncodeStream::setDiag (OSBOOL *value* = TRUE) [inline, virtual]

The setDiag method will turn diagnostic tracing on or off.

Parameters

value - Boolean value (default = TRUE = on)

7.5.3.47 virtual long ASN1BEREncodeStream::write (const OSOCTET **pdata*, size_t *size*) [inline, virtual]

Write data to the stream. This method writes the given number of octets from the given array to the output stream.

Parameters

pdata Pointer to the data to be written.

size The number of octets to write.

Returns

The total number of octets written into the stream, or negative value with error code if any error is occurred.

See also

rtxStreamWrite


The documentation for this class was generated from the following file:

- [ASN1BEREncodeStream.h](#)

7.6 ASN1BERMessageBuffer Class Reference

```
#include <asn1BerCppTypes.h>
```

Inheritance diagram for ASN1BERMessageBuffer:

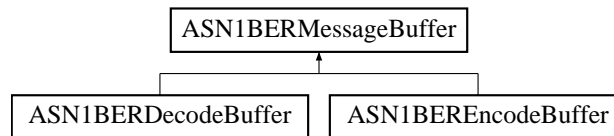

Public Member Functions

- int `calcIndefLen` (OSOCKET *buf_p, int bufSize=INT_MAX)
- void `binDump` ()
- void `hexDump` (int numocts)
- int `CalcIndefLen` (OSOCKET *buf_p)
- void `BinDump` ()
- void `HexDump` (int numocts)

Protected Member Functions

- `ASN1BERMessageBuffer` (Type bufferType)
- `ASN1BERMessageBuffer` (Type bufferType, OSRTContext *pContext)

7.6.1 Detailed Description

The `ASN1BERMessageBuffer` class is derived from the `ASN1MessageBuffer` base class. It is the base class for the `ASN1BEREncodeBuffer` and `ASN1BERDecodeBuffer` derived classes. It contains variables and methods specific to encoding or decoding ASN.1 messages using the Basic Encoding Rules (BER) and Distinguished Encoding Rules (DER). It is used to manage the buffer into which an ASN.1 message is to be encoded or decoded.

7.6.2 Constructor & Destructor Documentation

7.6.2.1 `ASN1BERMessageBuffer::ASN1BERMessageBuffer (Type bufferType) [inline, protected]`

The protected constructor creates a new context and sets the buffer class type. Use `getStatus()` method to determine has error occurred during the initialization or not.

Parameters

bufferType Type of message buffer that is being created (for example, BEREncode or BERDecode).

7.6.2.2 `ASN1BERMessageBuffer::ASN1BERMessageBuffer (Type bufferType, OSRTContext * pContext) [inline, protected]`

The protected constructor uses an existing context and sets the buffer class type. Use `getStatus()` method to determine has error occurred during the initialization or not.

Parameters

bufferType Type of message buffer that is being created (for example, BEREncode or BERDecode).

pContext A pointer to the context structure with which this buffer is associated.

7.6.3 Member Function Documentation

7.6.3.1 void ASN1BERMessageBuffer::binDump () [inline]

This method outputs a formatted binary dump of the current buffer contents to stdout.

Calling Sequence:

```
messageBuffer.binDump ();
```

where messageBuffer is an [ASN1BERMessageBuffer](#) derived class object.

References xu_dump().

7.6.3.2 int ASN1BERMessageBuffer::calcIndefLen (OSOCKET * buf_p, int bufSize = INT_MAX) [inline]

This method calculates the actual length of an indefinite length message component.

Calling Sequence:

```
len=messageBuffer.calcIndefLen (buf_p);
```

where messageBuffer is an [ASN1BERMessageBuffer](#) derived class object.

Parameters

buf_p A pointer to a message component encoded using indefinite length encoding.

bufSize Size of the buffer buf_p (in octets).

Returns

Length, in octets, of message component, as int.

References xd_indeflen_ex().

7.6.3.3 void ASN1BERMessageBuffer::hexDump (int numocts) [inline]

This method outputs a hexadecimal dump of the current buffer contents to stdout.

Calling sequence:

```
messageBuffer.hexDump ();
```

where messageBuffer is an [ASN1BERMessageBuffer](#) derived class object.

The documentation for this class was generated from the following file:

- [asn1BerCppTypes.h](#)

Chapter 8

File Documentation

8.1 asn1ber.h File Reference

```
#include "rtsrc/asn1type.h"
#include "rtbersrc/berMacros.h"
```

Classes

- struct [_Asn1BufLocDescr](#)

Defines

- #define [xd_utf8str](#)(pctxt, object_p, tagging, length) [xd_charstr](#) (pctxt, (const char**)object_p, tagging, ASN_ID_UTF8String, length)
- #define [xd_indeflen](#)(m) [xd_indeflen_ex](#)(m, INT_MAX)
- #define [xe_utf8str](#)(pctxt, object_p, tagging) [xe_charstr](#) (pctxt, (const char*)object_p, tagging, ASN_ID_UTF8String)
- #define [xu_addTagErrParm](#) berErrAddTagParm
- #define [xu_hex_dump](#)(msg, numoct, hdr) [rtxHexDump](#)(msg,numoct)

Typedefs

- typedef struct [_Asn1BufLocDescr](#) [Asn1BufLocDescr](#)

Functions

- int [xd_tag](#) (OSCTXT *pctxt, ASN1TAG *tag_p)
- int [xd_tag_len](#) (OSCTXT *pctxt, ASN1TAG *tag_p, int *len_p, OSOCTET flags)
- int [xd_match](#) (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSOCTET flags)
- int [xd_boolean](#) (OSCTXT *pctxt, OSBOOL *object_p, ASN1TagType tagging, int length)
- int [xd_integer](#) (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging, int length)
- int [xd_int8](#) (OSCTXT *pctxt, OSINT8 *object_p, ASN1TagType tagging, int length)
- int [xd_int16](#) (OSCTXT *pctxt, OSINT16 *object_p, ASN1TagType tagging, int length)
- int [xd_unsigned](#) (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging, int length)

- int `xd_uint8` (OSCTXT *pctx, OSUINT8 *object_p, ASN1TagType tagging, int length)
- int `xd_uint16` (OSCTXT *pctx, OSUINT16 *object_p, ASN1TagType tagging, int length)
- int `xd_int64` (OSCTXT *pctx, OSINT64 *object_p, ASN1TagType tagging, int length)
- int `xd_uint64` (OSCTXT *pctx, OSUINT64 *object_p, ASN1TagType tagging, int length)
- int `xd_bigint` (OSCTXT *pctx, const char **object_p, ASN1TagType tagging, int length)
- int `xd_bitstr_s` (OSCTXT *pctx, OSOCTET *object_p, OSUINT32 *numbits_p, ASN1TagType tagging, int length)
- int `xd_bitstr` (OSCTXT *pctx, const OSOCTET **object_p2, OSUINT32 *numbits_p, ASN1TagType tagging, int length)
- int `xd_octstr_s` (OSCTXT *pctx, OSOCTET *object_p, OSUINT32 *pnumocts, ASN1TagType tagging, int length)
- int `xd_octstr` (OSCTXT *pctx, const OSOCTET **object_p2, OSUINT32 *pnumocts, ASN1TagType tagging, int length)
- int `xd_charstr` (OSCTXT *pctx, const char **object_p, ASN1TagType tagging, ASN1TAG tag, int length)
- int `berDecCharArray` (OSCTXT *pctx, char *charArray, OSSIZE arraySize, ASN1TagType tagging, ASN1TAG tag, int length)
- int `xd_16BitCharStr` (OSCTXT *pctx, Asn16BitCharString *object_p, ASN1TagType tagging, ASN1TAG tag, int length)
- int `xd_32BitCharStr` (OSCTXT *pctx, Asn132BitCharString *object_p, ASN1TagType tagging, ASN1TAG tag, int length)
- int `xd_null` (OSCTXT *pctx, ASN1TagType tagging)
- int `xd_objid` (OSCTXT *pctx, ASN1OBJID *object_p, ASN1TagType tagging, int length)
- int `xd_oid64` (OSCTXT *pctx, ASN1OID64 *object_p, ASN1TagType tagging, int length)
- int `xd_reloid` (OSCTXT *pctx, ASN1OBJID *object_p, ASN1TagType tagging, int length)
- int `xd_real` (OSCTXT *pctx, OSREAL *object_p, ASN1TagType tagging, int length)
- int `xd_enum` (OSCTXT *pctx, OSINT32 *object_p, ASN1TagType tagging, int length)
- int `xd_enumUnsigned` (OSCTXT *pctx, OSUINT32 *object_p, ASN1TagType tagging, int length)
- int `xd_OpenType` (OSCTXT *pctx, const OSOCTET **object_p2, OSUINT32 *pnumocts)
- int `xd_OpenTypeExt` (OSCTXT *pctx, ASN1CCB *ccb_p, ASN1TAG *tags, int tagCount, OSRTDList *pElemList)
- int `xd_OpenTypeAppend` (OSCTXT *pctx, OSRTDList *pElemList)
- int `xd_real10` (OSCTXT *pctx, const char **object_p, ASN1TagType tagging, int length)
- int `xd_setp` (OSCTXT *pctx, const OSOCTET *msg_p, int msglen, ASN1TAG *tag_p, int *len_p)
- int `xd_indeflen_ex` (const OSOCTET *msg_p, int bufSize)
- int `xd_len` (OSCTXT *pctx, int *len_p)
- int `xd_chkend` (OSCTXT *pctx, ASN1CCB *ccb_p)
- int `xd_count` (OSCTXT *pctx, int length, int *count_p)
- int `xd_NextElement` (OSCTXT *pctx)
- int `xd_Tag1AndLen` (OSCTXT *pctx, OSINT32 *len_p)
- int `xd_memcpy` (OSCTXT *pctx, OSOCTET *object_p, int length)
- int `xd_match1` (OSCTXT *pctx, OSOCTET tag, int *len_p)
- int `xdf_tag` (FILE *fp, ASN1TAG *ptag, OSOCTET *buffer, int *pbufidx)
- int `xdf_len` (FILE *fp, OSINT32 *plen, OSOCTET *buffer, int *pbufidx)
- int `xdf_TagAndLen` (FILE *fp, ASN1TAG *ptag, OSINT32 *plen, OSOCTET *buffer, int *pbufidx)
- int `xdf_ReadPastEOC` (FILE *fp, OSOCTET *buffer, int bufsiz, int *pbufidx)
- int `xdf_ReadContents` (FILE *fp, int len, OSOCTET *buffer, int bufsiz, int *pbufidx)
- int `xe_identifier` (OSCTXT *pctx, OSUINT32 ident)
- int `xe_tag` (OSCTXT *pctx, ASN1TAG tag)
- int `xe_tag_len` (OSCTXT *pctx, ASN1TAG tag, int length)
- int `xe_boolean` (OSCTXT *pctx, OSBOOL *object_p, ASN1TagType tagging)
- int `xe_integer` (OSCTXT *pctx, int *object_p, ASN1TagType tagging)

- int [xe_unsigned](#) (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging)
- int [xe_int8](#) (OSCTXT *pctxt, OSINT8 *object_p, ASN1TagType tagging)
- int [xe_int16](#) (OSCTXT *pctxt, OSINT16 *object_p, ASN1TagType tagging)
- int [xe_int64](#) (OSCTXT *pctxt, OSINT64 *object_p, ASN1TagType tagging)
- int [xe_uint64](#) (OSCTXT *pctxt, OSUINT64 *object_p, ASN1TagType tagging)
- int [xe_uint8](#) (OSCTXT *pctxt, OSUINT8 *object_p, ASN1TagType tagging)
- int [xe_uint16](#) (OSCTXT *pctxt, OSUINT16 *object_p, ASN1TagType tagging)
- int [xe_bigint](#) (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)
- int [xe_bitstr](#) (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numbits, ASN1TagType tagging)
- int [xe_octstr](#) (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numocts, ASN1TagType tagging)
- int [xe_charstr](#) (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging, ASN1TAG tag)
- int [xe_16BitCharStr](#) (OSCTXT *pctxt, Asn116BitCharString *object_p, ASN1TagType tagging, ASN1TAG tag)
- int [xe_32BitCharStr](#) (OSCTXT *pctxt, Asn132BitCharString *object_p, ASN1TagType tagging, ASN1TAG tag)
- int [xe_null](#) (OSCTXT *pctxt, ASN1TagType tagging)
- int [xe_objid](#) (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging)
- int [xe_oid64](#) (OSCTXT *pctxt, ASN1OID64 *object_p, ASN1TagType tagging)
- int [xe_reloid](#) (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging)
- int [xe_enum](#) (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging)
- int [xe_enumUnsigned](#) (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging)
- int [xe_real](#) (OSCTXT *pctxt, OSREAL *object_p, ASN1TagType tagging)
- int [xe_OpenType](#) (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numocts)
- int [xe_OpenTypeExt](#) (OSCTXT *pctxt, OSRTDList *pElemList)
- int [xe_real10](#) (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)
- int [xe_derReal10](#) (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)
- int [xe_setp](#) (OSCTXT *pctxt, OSOCTET *buf_p, int bufsiz)
- OSOCTET * [xe_getp](#) (OSCTXT *pctxt)
- void [xe_free](#) (OSCTXT *pctxt)
- int [xe_expandBuffer](#) (OSCTXT *pctxt, size_t length)
- int [xe_memcpy](#) (OSCTXT *pctxt, const OSOCTET *object_p, size_t length)
- int [xe_len](#) (OSCTXT *pctxt, int length)
- int [xe_derCanonicalSort](#) (OSCTXT *pctxt, OSRTSList *pList)
- int [xe_TagAndIndefLen](#) (OSCTXT *pctxt, ASN1TAG tag, int length)
- void [xe_getBufLocDescr](#) (OSCTXT *pctxt, OSUINT32 length, [Asn1BufLocDescr](#) *pDescr)
- int [derEncBitString](#) (OSCTXT *pctxt, const OSOCTET *pvalue, OSUINT32 numbits, ASN1TagType tagging)
- int [berDefToIndefLen](#) (OSCTXT *pSrcCtxt, OSCTXT *pDstCtxt)
- int [berIndefToDefLen](#) (OSCTXT *pSrcCtxt, OSCTXT *pDstCtxt)
- OSBOOL [berErrAddTagParm](#) (OSCTXT *pctxt, ASN1TAG tag)
- int [berErrUnexpTag](#) (OSCTXT *pctxt, ASN1TAG exptag)
- int [berGetLibVersion](#) (OSVOIDARG)
- const char * [berGetLibInfo](#) (OSVOIDARG)
- int [berParseTagLen](#) (const OSOCTET *buffer, size_t bufidx, size_t bufsiz, ASN1TAG *ptag, size_t *plen)
- const char * [berTagToString](#) (ASN1TAG tag, char *buffer, size_t bufsiz)
- const char * [berTagToDynStr](#) (OSCTXT *pctxt, ASN1TAG tag)
- int [xu_verify_len](#) (OSOCTET *msg_p)
- void * [xu_parse_mmbuf](#) (OSOCTET **buf_p2, int *buflen_p, OSOCTET *start_p, int bufsiz)
- void [xu_alloc_array](#) (OSCTXT *pctxt, ASN1SeqOf *seqOf_p, int recSize, int recCount)
- void [xu_octscopy_s](#) (OSUINT32 *nocts_p, OSOCTET *data_p, char *cstr, char zterm)
- void [xu_octscopy_ss](#) (ASN1OctStr *octStr_p, char *cstring, char zterm)

- void **xu_octscopy_d** (OSCTXT *pctxt, OSUINT32 *nocts_p, const OSOCTET **data_p2, char *cstring, char zterm)
- void **xu_octscopy_ds** (OSCTXT *pctxt, ASN1DynOctStr *octStr_p, char *cstring, char zterm)
- void **xu_octmcpy_s** (ASN1OctStr *octStr_p, void *data_p, int datalen)
- void **xu_octmcpy_d** (OSCTXT *pctxt, ASN1DynOctStr *octStr_p, void *data_p, int datalen)
- char * **xu_fetchstr** (int numocts, char *data)
- int **xu_hexstcpy** (char *data, char *hstring)
- int **xu_binstcpy** (char *data, char *bstring)
- int **xu_dump** (const OSOCTET *msgptr, ASN1DumpCbFunc cb, void *cbArg_p)
- int **xu_fdump** (FILE *file_p, const OSOCTET *msgptr)
- int **xu_dump2** (OSCTXT *pctxt, const OSOCTET *msgptr)
- void **xu_fmt_tag** (ASN1TAG *tag_p, char *class_p, char *form_p, char *id_code)
- char * **xu_fmt_tag2** (ASN1TAG *tag_p, char *bufp)
- char * **xu_fmt_contents** (OSCTXT *pctxt, int len, int *count)
- int **xu_fread** (FILE *fp, OSOCTET *bufp, int bufsiz)
- void **xu_SaveBufferState** (OSCTXT *pCtxt, OSRTBufSave *pSavedInfo)
- void **xu_RestoreBufferState** (OSCTXT *pCtxt, OSRTBufSave *pSavedInfo)

8.1.1 Detailed Description

ASN.1 runtime constants, data structure definitions, and functions to support the Basic Encoding Rules (BER) and Distinguished Encoding Rules (DER) as defined in the ITU-T X.690 standard.

8.2 `asn1BerCppType.h` File Reference

```
#include "rtsrc/asn1CppType.h"  
#include "rtbersrc/asn1ber.h"  
#include "rtxsrc/rtxPrint.h"
```

Classes

- class [ASN1BERMessageBuffer](#)
- class [ASN1BEREncodeBuffer](#)
- class [ASN1BERDecodeBuffer](#)

8.2.1 Detailed Description

BER/DER/CER C++ type and class definitions.

8.3 ASN1BERDecodeStream.h File Reference

```
#include "rtsrc/asn1CppTypes.h"  
#include "rtxsrc/OSRTInputStreamIF.h"  
#include "rtbersrc/asn1berStream.h"
```

Classes

- class [ASN1BERDecodeStream](#)

8.3.1 Detailed Description

The C++ definitions for ASN.1 BER input streams.

8.4 ASN1BEREncodeStream.h File Reference

```
#include "rtsrc/asn1CppTypes.h"  
#include "rtxsrc/OSRTOutputStreamIF.h"  
#include "rtbersrc/asn1berStream.h"
```

Classes

- class [ASN1BEREncodeStream](#)

8.4.1 Detailed Description

The C++ definitions for ASN.1 BER output streams.

8.5 asn1berSocket.h File Reference

```
#include "rtbersrc/asn1ber.h"
```

```
#include "rtxsrc/rtxSocket.h"
```

Functions

- int [berReadMsgFromSocket](#) (OSCTXT *pctx, OSRTSOCKET socket, OSOCTET *buffer, int bufsiz, OSOCTET **ppDestBuffer, int *pMessageSize)

8.5.1 Detailed Description

8.6 asn1berStream.h File Reference

```
#include "rtbersrc/asn1ber.h"  
#include "rtxsrc/rtxStream.h"
```

Defines

- #define **BS_CHKEOB**(pctxt)
- #define **BS_CHKEND**(pctxt, ccb_p)

Functions

- int **berStrmInitContext** (OSCTXT *pctxt)
- int **berStrmInitContextUsingKey** (OSCTXT *pctxt, const OSOCTET *key, size_t keylen)
- int **berStrmFreeContext** (OSCTXT *pctxt)
- int **berEncStrmBigInt** (OSCTXT *pctxt, const char *pvalue, ASN1TagType tagging)
- int **berEncStrmBigIntNchars** (OSCTXT *pctxt, const char *pvalue, size_t nchars, ASN1TagType tagging)
- int **berEncStrmBitStr** (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numbits, ASN1TagType tagging)
- int **berEncStrmBMPStr** (OSCTXT *pctxt, const Asn116BitCharString *object_p, ASN1TagType tagging)
- int **berEncStrmBool** (OSCTXT *pctxt, OSBOOL value, ASN1TagType tagging)
- int **berEncStrmCharStr** (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging, ASN1TAG tag)
- int **berEncStrmDefLength** (OSCTXT *pctxt, size_t length)
- int **berEncStrmEOC** (OSCTXT *pctxt)
- int **berEncStrmEnum** (OSCTXT *pctxt, OSINT32 value, ASN1TagType tagging)
- int **berEncStrmInt** (OSCTXT *pctxt, OSINT32 value, ASN1TagType tagging)
- int **berEncStrmInt8** (OSCTXT *pctxt, OSINT8 value, ASN1TagType tagging)
- int **berEncStrmInt16** (OSCTXT *pctxt, OSINT16 value, ASN1TagType tagging)
- int **berEncStrmInt64** (OSCTXT *pctxt, OSINT64 value, ASN1TagType tagging)
- int **berEncStrmLength** (OSCTXT *pctxt, int length)
- int **berEncStrmNull** (OSCTXT *pctxt, ASN1TagType tagging)
- int **berEncStrmObjId** (OSCTXT *pctxt, const ASN1OBJID *object_p, ASN1TagType tagging)
- int **berEncStrmObjId64** (OSCTXT *pctxt, const ASN1OID64 *object_p, ASN1TagType tagging)
- int **berEncStrmOctStr** (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numocts, ASN1TagType tagging)
- int **berEncStrmOpenTypeExt** (OSCTXT *pctxt, OSRTDList *pElemList)
- int **berEncStrmReal** (OSCTXT *pctxt, OSREAL value, ASN1TagType tagging)
- int **berEncStrmReal10** (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)
- int **cerEncStrmReal10** (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging)
- int **berEncStrmRelativeOID** (OSCTXT *pctxt, const ASN1OBJID *object_p, ASN1TagType tagging)
- int **berEncStrmTag** (OSCTXT *pctxt, ASN1TAG tag)
- int **berEncStrmTagAndLen** (OSCTXT *pctxt, ASN1TAG tag, int length)
- int **berEncStrmTagAndIndefLen** (OSCTXT *pctxt, ASN1TAG tag)
- int **berEncStrmUInt** (OSCTXT *pctxt, OSUINT32 value, ASN1TagType tagging)
- int **berEncStrmUInt8** (OSCTXT *pctxt, OSUINT8 value, ASN1TagType tagging)
- int **berEncStrmUInt16** (OSCTXT *pctxt, OSUINT16 value, ASN1TagType tagging)
- int **berEncStrmUInt64** (OSCTXT *pctxt, OSUINT64 value, ASN1TagType tagging)
- int **berEncStrmUnivStr** (OSCTXT *pctxt, const Asn132BitCharString *object_p, ASN1TagType tagging)
- int **berEncStrmXSDDAny** (OSCTXT *pctxt, OSXSDDAny *pvalue, ASN1TagType tagging)

- int `berEncStrmWriteOctet` (OSCTXT *pctxt, OSOCTET octet)
- int `berEncStrmWriteOctets` (OSCTXT *pctxt, const OSOCTET *pocets, size_t numocts)
- int `cerEncStrmBMPStr` (OSCTXT *pctxt, const Asn116BitCharString *object_p, ASN1TagType tagging)
- int `cerEncStrmBitStr` (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numbits, ASN1TagType tagging)
- int `cerEncStrmCharStr` (OSCTXT *pctxt, const char *object_p, ASN1TagType tagging, ASN1TAG tag)
- int `cerEncStrmOctStr` (OSCTXT *pctxt, const OSOCTET *object_p, OSUINT32 numocts, ASN1TagType tagging)
- int `cerEncStrmUnivStr` (OSCTXT *pctxt, const Asn132BitCharString *object_p, ASN1TagType tagging)
- int `berDecStrmBMPStr` (OSCTXT *pctxt, Asn116BitCharString *object_p, ASN1TagType tagging, int length)
- int `berDecStrmBigInt` (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, int length)
- int `berDecStrmBigEnum` (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, int length)
- int `berDecStrmBitStr` (OSCTXT *pctxt, OSOCTET *pvalue, OSUINT32 *pnbits, ASN1TagType tagging, int length)
- int `berDecStrmBool` (OSCTXT *pctxt, OSBOOL *object_p, ASN1TagType tagging, int length)
- int `berDecStrmCharStr` (OSCTXT *pctxt, const char **ppvalue, ASN1TagType tagging, ASN1TAG tag, int length)
- OSBOOL `berDecStrmCheckEnd` (OSCTXT *pctxt, ASN1CCB *pccb)
- int `berDecStrmDynBitStr` (OSCTXT *pctxt, const OSOCTET **ppvalue, OSUINT32 *pnbits, ASN1TagType tagging, int length)
- int `berDecStrmDynOctStr` (OSCTXT *pctxt, const OSOCTET **ppvalue, OSUINT32 *pnocets, ASN1TagType tagging, int length)
- int `berDecStrmEnum` (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging, int length)
- int `berDecStrmFindTag` (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSBOOL advance)
- int `berDecStrmGetTLVLength` (OSCTXT *pctxt)
- int `berDecStrmInt` (OSCTXT *pctxt, OSINT32 *object_p, ASN1TagType tagging, int length)
- int `berDecStrmInt8` (OSCTXT *pctxt, OSINT8 *object_p, ASN1TagType tagging, int length)
- int `berDecStrmInt16` (OSCTXT *pctxt, OSINT16 *object_p, ASN1TagType tagging, int length)
- int `berDecStrmInt64` (OSCTXT *pctxt, OSINT64 *object_p, ASN1TagType tagging, int length)
- int `berDecStrmLength` (OSCTXT *pctxt, int *len_p)
- int `berDecStrmMatchEOC` (OSCTXT *pctxt)
- int `berDecStrmMatchTag` (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSBOOL advance)
- int `berDecStrmNextElement` (OSCTXT *pctxt)
- int `berDecStrmNull` (OSCTXT *pctxt, ASN1TagType tagging)
- int `berDecStrmObjId` (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging, int length)
- int `berDecStrmObjId64` (OSCTXT *pctxt, ASN1OID64 *object_p, ASN1TagType tagging, int length)
- int `berDecStrmOctStr` (OSCTXT *pctxt, OSOCTET *pvalue, OSUINT32 *pnocets, ASN1TagType tagging, int length)
- int `berDecStrmOpenType` (OSCTXT *pctxt, const OSOCTET **object_p2, OSUINT32 *pnocets)
- int `berDecStrmOpenTypeAppend` (OSCTXT *pctxt, OSRTDList *pElemList)
- int `berDecStrmOpenTypeExt` (OSCTXT *pctxt, ASN1CCB *ccb_p, ASN1TAG *tags, int tagCount, OSRTDList *pElemList)
- int `berDecStrmPeekTagAndLen` (OSCTXT *pctxt, ASN1TAG *ptag, int *plen)
- int `berDecStrmReadDynTLV` (OSCTXT *pctxt, OSOCTET **ppbuf)
- int `berDecStrmReadTLV` (OSCTXT *pctxt, OSOCTET *buf, size_t bufsiz)
- int `berDecStrmReal` (OSCTXT *pctxt, OSREAL *object_p, ASN1TagType tagging, int length)
- int `berDecStrmReal10` (OSCTXT *pctxt, const char **object_p, ASN1TagType tagging, int length)
- int `berDecStrmRelativeOID` (OSCTXT *pctxt, ASN1OBJID *object_p, ASN1TagType tagging, int length)
- int `berDecStrmTag` (OSCTXT *pctxt, ASN1TAG *tag_p)
- int `berDecStrmTagAndLen` (OSCTXT *pctxt, ASN1TAG *tag_p, int *len_p)
- OSBOOL `berDecStrmTestEOC` (OSCTXT *pctxt, ASN1CCB *ccb_p)

- int [berDecStrmTestTag](#) (OSCTXT *pctxt, ASN1TAG tag, int *len_p, OSBOOL advance)
- int [berDecStrmUInt](#) (OSCTXT *pctxt, OSUINT32 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmUInt8](#) (OSCTXT *pctxt, OSUINT8 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmUInt16](#) (OSCTXT *pctxt, OSUINT16 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmUInt64](#) (OSCTXT *pctxt, OSUINT64 *object_p, ASN1TagType tagging, int length)
- int [berDecStrmUnivStr](#) (OSCTXT *pctxt, Asn132BitCharString *object_p, ASN1TagType tagging, int length)
- int [cerEncCanonicalSort](#) (OSCTXT *pctxt, OSCTXT *pMemCtxt, OSRTSList *pList)
- void [cerGetBufLocDescr](#) (OSCTXT *pctxt, [Asn1BufLocDescr](#) *pDescr)
- void [cerAddBufLocDescr](#) (OSCTXT *pctxt, OSRTSList *pElemList, [Asn1BufLocDescr](#) *pDescr)

8.6.1 Detailed Description

ASN.1 runtime constants, data structure definitions, and functions to support the streaming encoding/decoding of Basic Encoding Rules (BER) as defined in the ITU-T X.690 standard.

Index

- [_Asn1BufLocDescr](#), 89
- [asn1ber.h](#), 140
- [asn1BerCppType.h](#), 144
- [ASN1BERDecodeBuffer](#), 90
 - [ASN1BERDecodeBuffer](#), 90, 91
 - [findElement](#), 91
 - [getMsgPtr](#), 91
 - [init](#), 92
 - [isA](#), 92
 - [operator>>](#), 92
 - [parseTagLen](#), 92
 - [readBinaryFile](#), 93
 - [setBuffer](#), 93
- [ASN1BERDecodeStream](#), 94
 - [ASN1BERDecodeStream](#), 95
 - [byteIndex](#), 95
 - [chkend](#), 95
 - [close](#), 96
 - [currentPos](#), 96
 - [decodeBigInt](#), 96
 - [decodeBitStr](#), 97
 - [decodeBMPStr](#), 98
 - [decodeBool](#), 98
 - [decodeCharStr](#), 99
 - [decodeEnum](#), 99
 - [decodeEoc](#), 100
 - [decodeInt](#), 100
 - [decodeInt16](#), 100
 - [decodeInt64](#), 101
 - [decodeInt8](#), 101
 - [decodeLength](#), 102
 - [decodeNull](#), 102
 - [decodeObj](#), 103
 - [decodeObjId](#), 103
 - [decodeObjId64](#), 103
 - [decodeOctStr](#), 104
 - [decodeOpenType](#), 105
 - [decodeReal](#), 105
 - [decodeRelativeOID](#), 106
 - [decodeTag](#), 106
 - [decodeTagAndLen](#), 107
 - [decodeUInt](#), 107
 - [decodeUInt16](#), 108
 - [decodeUInt64](#), 108
 - [decodeUInt8](#), 109
 - [decodeUnivStr](#), 109
 - [flush](#), 109
 - [getAppInfo](#), 110
 - [getContext](#), 110
 - [getCtxtPtr](#), 110
 - [getErrorInfo](#), 110
 - [getPosition](#), 111
 - [getStatus](#), 111
 - [getTLVLength](#), 111
 - [isA](#), 111
 - [isOpened](#), 112
 - [mark](#), 112
 - [markSupported](#), 112
 - [operator>>](#), 113
 - [peekTagAndLen](#), 113
 - [printErrorInfo](#), 113
 - [read](#), 113
 - [readBlocking](#), 114
 - [readTLV](#), 114
 - [reset](#), 114
 - [resetErrorInfo](#), 115
 - [setAppInfo](#), 115
 - [setDiag](#), 115
 - [setPosition](#), 115
 - [skip](#), 115
- [ASN1BERDecodeStream.h](#), 145
- [ASN1BEREncodeBuffer](#), 117
 - [ASN1BEREncodeBuffer](#), 117
 - [freeBuffer](#), 118
 - [getMsgCopy](#), 118
 - [getMsgPtr](#), 118
 - [init](#), 118
 - [isA](#), 119
 - [operator<<](#), 119
 - [setBuffer](#), 119
- [ASN1BEREncodeStream](#), 120
 - [ASN1BEREncodeStream](#), 121
 - [close](#), 121
 - [encodeBigInt](#), 121
 - [encodeBigIntNchars](#), 122
 - [encodeBitStr](#), 122
 - [encodeBMPStr](#), 123
 - [encodeBool](#), 123
 - [encodeCharStr](#), 124

- encodeEnum, 124
- encodeEoc, 125
- encodeIndefLen, 125
- encodeInt, 125
- encodeInt16, 126
- encodeInt64, 126
- encodeInt8, 127
- encodeLen, 127
- encodeNull, 127
- encodeObj, 128
- encodeObjId, 128
- encodeObjId64, 128
- encodeOctStr, 129
- encodeReal, 130
- encodeRelativeOID, 130
- encodeTag, 131
- encodeTagAndIndefLen, 131
- encodeTagAndLen, 131
- encodeUInt, 132
- encodeUInt16, 132
- encodeUInt64, 133
- encodeUInt8, 133
- encodeUnivStr, 133
- flush, 134
- getAppInfo, 134
- getContext, 134
- getCtxtPtr, 134
- getErrorInfo, 135
- getStatus, 135
- isA, 135
- isOpened, 136
- operator<<, 136
- printErrorInfo, 136
- resetErrorInfo, 136
- setAppInfo, 136
- setDiag, 136
- write, 137
- ASN1BEREncodeStream.h, 146
- ASN1BERMessageBuffer, 138
 - ASN1BERMessageBuffer, 138
 - binDump, 139
 - calcIndefLen, 139
 - hexDump, 139
- asn1berSocket.h, 147
- asn1berStream.h, 148
- Asn1BufLocDescr
 - berruntime, 8
- BER Message Buffer Classes, 7
- BER Runtime Library Functions., 8
- BER/DER C Decode Functions., 9
- BER/DER C Encode Functions., 31
- BER/DER C File Functions., 28
- BER/DER/CER C++ Run-Time Classes., 6
- BER/PER C Utility Functions, 47
- berDecCharArray
 - berdecruntime, 11
- berdecruntime
 - berDecCharArray, 11
 - xd_16BitCharStr, 11
 - xd_32BitCharStr, 11
 - xd_bigint, 12
 - xd_bitstr, 12
 - xd_bitstr_s, 13
 - xd_boolean, 13
 - xd_charstr, 14
 - xd_chkend, 14
 - xd_count, 15
 - xd_enum, 15
 - xd_enumUnsigned, 15
 - xd_indeflen_ex, 16
 - xd_int16, 16
 - xd_int64, 16
 - xd_int8, 17
 - xd_integer, 17
 - xd_len, 18
 - xd_match, 18
 - xd_match1, 18
 - xd_memcpy, 19
 - xd_NextElement, 19
 - xd_null, 19
 - xd_objid, 20
 - xd_octstr, 20
 - xd_octstr_s, 21
 - xd_oid64, 21
 - xd_OpenType, 21
 - xd_OpenTypeAppend, 22
 - xd_OpenTypeExt, 22
 - xd_real, 23
 - xd_real10, 23
 - xd_reloid, 23
 - xd_setp, 24
 - xd_tag, 24
 - xd_Tag1AndLen, 25
 - xd_tag_len, 25
 - xd_uint16, 25
 - xd_uint64, 26
 - xd_uint8, 26
 - xd_unsigned, 27
 - xd_utf8str, 10
- berDecStrmBigInt
 - berstreamdec, 71
- berDecStrmBitStr
 - berstreamdec, 71
- berDecStrmBMPStr
 - berstreamdec, 72
- berDecStrmBool
 - berstreamdec, 72

- berDecStrmCharStr
 - berstreamdec, 72
- berDecStrmCheckEnd
 - berstreamdec, 73
- berDecStrmDynBitStr
 - berstreamdec, 73
- berDecStrmDynOctStr
 - berstreamdec, 74
- berDecStrmEnum
 - berstreamdec, 74
- berDecStrmFindTag
 - berstreamdec, 75
- berDecStrmGetTLVLength
 - berstreamdec, 75
- berDecStrmInt
 - berstreamdec, 75
- berDecStrmInt16
 - berstreamdec, 76
- berDecStrmInt64
 - berstreamdec, 76
- berDecStrmInt8
 - berstreamdec, 76
- berDecStrmLength
 - berstreamdec, 77
- berDecStrmMatchEOC
 - berstreamdec, 77
- berDecStrmMatchTag
 - berstreamdec, 77
- berDecStrmNextElement
 - berstreamdec, 78
- berDecStrmNull
 - berstreamdec, 78
- berDecStrmObjId
 - berstreamdec, 78
- berDecStrmObjId64
 - berstreamdec, 79
- berDecStrmOctStr
 - berstreamdec, 79
- berDecStrmOpenType
 - berstreamdec, 80
- berDecStrmOpenTypeAppend
 - berstreamdec, 80
- berDecStrmOpenTypeExt
 - berstreamdec, 80
- berDecStrmPeekTagAndLen
 - berstreamdec, 81
- berDecStrmReadDynTLV
 - berstreamdec, 81
- berDecStrmReadTLV
 - berstreamdec, 81
- berDecStrmReal
 - berstreamdec, 82
- berDecStrmReal10
 - berstreamdec, 82
- berDecStrmRelativeOID
 - berstreamdec, 82
- berDecStrmTag
 - berstreamdec, 83
- berDecStrmTagAndLen
 - berstreamdec, 83
- berDecStrmTestEOC
 - berstreamdec, 83
- berDecStrmTestTag
 - berstreamdec, 84
- berDecStrmUInt
 - berstreamdec, 84
- berDecStrmUInt16
 - berstreamdec, 85
- berDecStrmUInt64
 - berstreamdec, 85
- berDecStrmUInt8
 - berstreamdec, 85
- berDecStrmUnivStr
 - berstreamdec, 86
- berDefToIndefLen
 - berperUtil, 48
- berderfilefun
 - xdf_len, 28
 - xdf_ReadContents, 28
 - xdf_ReadPastEOC, 29
 - xdf_tag, 29
 - xdf_TagAndLen, 30
- berencruntime
 - derEncBitString, 32
 - xe_16BitCharStr, 32
 - xe_32BitCharStr, 33
 - xe_bigint, 33
 - xe_bitstr, 34
 - xe_boolean, 34
 - xe_charstr, 35
 - xe_derCanonicalSort, 35
 - xe_derReal10, 35
 - xe_enum, 36
 - xe_enumUnsigned, 36
 - xe_expandBuffer, 36
 - xe_free, 37
 - xe_getBufLocDescr, 37
 - xe_getp, 37
 - xe_identifier, 38
 - xe_int16, 38
 - xe_int64, 38
 - xe_int8, 39
 - xe_integer, 39
 - xe_len, 39
 - xe_memcpy, 40
 - xe_null, 40
 - xe_objid, 40
 - xe_octstr, 41

- xe_oid64, 41
- xe_OpenType, 41
- xe_OpenTypeExt, 42
- xe_real, 42
- xe_real10, 42
- xe_reloid, 43
- xe_setp, 43
- xe_tag, 43
- xe_tag_len, 44
- xe_TagAndIndefLen, 44
- xe_uint16, 44
- xe_uint64, 45
- xe_uint8, 45
- xe_unsigned, 46
- xe_utf8str, 32
- berEncStrmBigInt
 - berstreamenc, 56
- berEncStrmBigIntNchars
 - berstreamenc, 56
- berEncStrmBitStr
 - berstreamenc, 56
- berEncStrmBMPStr
 - berstreamenc, 57
- berEncStrmBool
 - berstreamenc, 57
- berEncStrmCharStr
 - berstreamenc, 58
- berEncStrmDefLength
 - berstreamenc, 58
- berEncStrmEnum
 - berstreamenc, 58
- berEncStrmEOC
 - berstreamenc, 59
- berEncStrmInt
 - berstreamenc, 59
- berEncStrmInt16
 - berstreamenc, 59
- berEncStrmInt64
 - berstreamenc, 60
- berEncStrmInt8
 - berstreamenc, 60
- berEncStrmLength
 - berstreamenc, 60
- berEncStrmNull
 - berstreamenc, 61
- berEncStrmObjId
 - berstreamenc, 61
- berEncStrmObjId64
 - berstreamenc, 61
- berEncStrmOctStr
 - berstreamenc, 62
- berEncStrmOpenTypeExt
 - berstreamenc, 62
- berEncStrmReal
 - berstreamenc, 62
- berEncStrmReal10
 - berstreamenc, 63
- berEncStrmRelativeOID
 - berstreamenc, 63
- berEncStrmTag
 - berstreamenc, 63
- berEncStrmTagAndIndefLen
 - berstreamenc, 64
- berEncStrmTagAndLen
 - berstreamenc, 64
- berEncStrmUInt
 - berstreamenc, 64
- berEncStrmUInt16
 - berstreamenc, 65
- berEncStrmUInt64
 - berstreamenc, 65
- berEncStrmUInt8
 - berstreamenc, 65
- berEncStrmUnivStr
 - berstreamenc, 66
- berEncStrmWriteOctet
 - berstreamenc, 66
- berEncStrmWriteOctets
 - berstreamenc, 66
- berEncStrmXSDAny
 - berstreamenc, 67
- berErrAddTagParm
 - berperUtil, 48
- berErrUnexpTag
 - berperUtil, 48
- berGetLibInfo
 - berperUtil, 49
- berGetLibVersion
 - berperUtil, 49
- berIndefToDefLen
 - berperUtil, 49
- berParseTagLen
 - berperUtil, 49
- berperUtil
 - berDefToIndefLen, 48
 - berErrAddTagParm, 48
 - berErrUnexpTag, 48
 - berGetLibInfo, 49
 - berGetLibVersion, 49
 - berIndefToDefLen, 49
 - berParseTagLen, 49
 - berReadMsgFromSocket, 49
 - berTagToDynStr, 50
 - berTagToString, 50
 - xu_alloc_array, 50
 - xu_dump, 51
 - xu_dump2, 51
 - xu_fdump, 52

- xu_hex_dump, 48
- xu_RestoreBufferState, 52
- xu_SaveBufferState, 52
- berReadMsgFromSocket
 - berperUtil, 49
- berruntime
 - Asn1BufLocDescr, 8
- berstream
 - berStrmFreeContext, 54
 - berStrmInitContext, 54
 - BS_CHKEND, 53
 - BS_CHKEOB, 53
- berstreamdec
 - berDecStrmBigInt, 71
 - berDecStrmBitStr, 71
 - berDecStrmBMPStr, 72
 - berDecStrmBool, 72
 - berDecStrmCharStr, 72
 - berDecStrmCheckEnd, 73
 - berDecStrmDynBitStr, 73
 - berDecStrmDynOctStr, 74
 - berDecStrmEnum, 74
 - berDecStrmFindTag, 75
 - berDecStrmGetTLVLength, 75
 - berDecStrmInt, 75
 - berDecStrmInt16, 76
 - berDecStrmInt64, 76
 - berDecStrmInt8, 76
 - berDecStrmLength, 77
 - berDecStrmMatchEOC, 77
 - berDecStrmMatchTag, 77
 - berDecStrmNextElement, 78
 - berDecStrmNull, 78
 - berDecStrmObjId, 78
 - berDecStrmObjId64, 79
 - berDecStrmOctStr, 79
 - berDecStrmOpenType, 80
 - berDecStrmOpenTypeAppend, 80
 - berDecStrmOpenTypeExt, 80
 - berDecStrmPeekTagAndLen, 81
 - berDecStrmReadDynTLV, 81
 - berDecStrmReadTLV, 81
 - berDecStrmReal, 82
 - berDecStrmReal10, 82
 - berDecStrmRelativeOID, 82
 - berDecStrmTag, 83
 - berDecStrmTagAndLen, 83
 - berDecStrmTestEOC, 83
 - berDecStrmTestTag, 84
 - berDecStrmUInt, 84
 - berDecStrmUInt16, 85
 - berDecStrmUInt64, 85
 - berDecStrmUInt8, 85
 - berDecStrmUnivStr, 86
- berstreamenc
 - berEncStrmBigInt, 56
 - berEncStrmBigIntNchars, 56
 - berEncStrmBitStr, 56
 - berEncStrmBMPStr, 57
 - berEncStrmBool, 57
 - berEncStrmCharStr, 58
 - berEncStrmDefLength, 58
 - berEncStrmEnum, 58
 - berEncStrmEOC, 59
 - berEncStrmInt, 59
 - berEncStrmInt16, 59
 - berEncStrmInt64, 60
 - berEncStrmInt8, 60
 - berEncStrmLength, 60
 - berEncStrmNull, 61
 - berEncStrmObjId, 61
 - berEncStrmObjId64, 61
 - berEncStrmOctStr, 62
 - berEncStrmOpenTypeExt, 62
 - berEncStrmReal, 62
 - berEncStrmReal10, 63
 - berEncStrmRelativeOID, 63
 - berEncStrmTag, 63
 - berEncStrmTagAndIndefLen, 64
 - berEncStrmTagAndLen, 64
 - berEncStrmUInt, 64
 - berEncStrmUInt16, 65
 - berEncStrmUInt64, 65
 - berEncStrmUInt8, 65
 - berEncStrmUnivStr, 66
 - berEncStrmWriteOctet, 66
 - berEncStrmWriteOctets, 66
 - berEncStrmXSDAny, 67
 - cerEncStrmBitStr, 67
 - cerEncStrmBMPStr, 67
 - cerEncStrmCharStr, 68
 - cerEncStrmOctStr, 68
 - cerEncStrmReal10, 69
 - cerEncStrmUnivStr, 69
- berStrmFreeContext
 - berstream, 54
- berStrmInitContext
 - berstream, 54
- berTagToDynStr
 - berperUtil, 50
- berTagToString
 - berperUtil, 50
- binDump
 - ASN1BERMessageBuffer, 139
- BS_CHKEND
 - berstream, 53
- BS_CHKEOB
 - berstream, 53

- byteIndex
 - ASN1BERDecodeStream, 95
- C Streaming BER Decode Functions., 70
- C Streaming BER Encode Functions., 55
- C++ classes for streaming BER decoding., 88
- C++ classes for streaming BER encoding., 87
- calcIndefLen
 - ASN1BERMessageBuffer, 139
- cerEncStrmBitStr
 - berstreamenc, 67
- cerEncStrmBMPStr
 - berstreamenc, 67
- cerEncStrmCharStr
 - berstreamenc, 68
- cerEncStrmOctStr
 - berstreamenc, 68
- cerEncStrmReal10
 - berstreamenc, 69
- cerEncStrmUnivStr
 - berstreamenc, 69
- chkend
 - ASN1BERDecodeStream, 95
- close
 - ASN1BERDecodeStream, 96
 - ASN1BEREncodeStream, 121
- currentPos
 - ASN1BERDecodeStream, 96
- decodeBigInt
 - ASN1BERDecodeStream, 96
- decodeBitStr
 - ASN1BERDecodeStream, 97
- decodeBMPStr
 - ASN1BERDecodeStream, 98
- decodeBool
 - ASN1BERDecodeStream, 98
- decodeCharStr
 - ASN1BERDecodeStream, 99
- decodeEnum
 - ASN1BERDecodeStream, 99
- decodeEoc
 - ASN1BERDecodeStream, 100
- decodeInt
 - ASN1BERDecodeStream, 100
- decodeInt16
 - ASN1BERDecodeStream, 100
- decodeInt64
 - ASN1BERDecodeStream, 101
- decodeInt8
 - ASN1BERDecodeStream, 101
- decodeLength
 - ASN1BERDecodeStream, 102
- decodeNull
 - ASN1BERDecodeStream, 102
- decodeObj
 - ASN1BERDecodeStream, 103
- decodeObjId
 - ASN1BERDecodeStream, 103
- decodeObjId64
 - ASN1BERDecodeStream, 103
- decodeOctStr
 - ASN1BERDecodeStream, 104
- decodeOpenType
 - ASN1BERDecodeStream, 105
- decodeReal
 - ASN1BERDecodeStream, 105
- decodeRelativeOID
 - ASN1BERDecodeStream, 106
- decodeTag
 - ASN1BERDecodeStream, 106
- decodeTagAndLen
 - ASN1BERDecodeStream, 107
- decodeUInt
 - ASN1BERDecodeStream, 107
- decodeUInt16
 - ASN1BERDecodeStream, 108
- decodeUInt64
 - ASN1BERDecodeStream, 108
- decodeUInt8
 - ASN1BERDecodeStream, 109
- decodeUnivStr
 - ASN1BERDecodeStream, 109
- derEncBitString
 - berencruntime, 32
- encodeBigInt
 - ASN1BEREncodeStream, 121
- encodeBigIntNchars
 - ASN1BEREncodeStream, 122
- encodeBitStr
 - ASN1BEREncodeStream, 122
- encodeBMPStr
 - ASN1BEREncodeStream, 123
- encodeBool
 - ASN1BEREncodeStream, 123
- encodeCharStr
 - ASN1BEREncodeStream, 124
- encodeEnum
 - ASN1BEREncodeStream, 124
- encodeEoc
 - ASN1BEREncodeStream, 125
- encodeIndefLen
 - ASN1BEREncodeStream, 125
- encodeInt
 - ASN1BEREncodeStream, 125
- encodeInt16
 - ASN1BEREncodeStream, 126

- encodeInt64
 - ASN1BEREncodeStream, [126](#)
- encodeInt8
 - ASN1BEREncodeStream, [127](#)
- encodeLen
 - ASN1BEREncodeStream, [127](#)
- encodeNull
 - ASN1BEREncodeStream, [127](#)
- encodeObj
 - ASN1BEREncodeStream, [128](#)
- encodeObjId
 - ASN1BEREncodeStream, [128](#)
- encodeObjId64
 - ASN1BEREncodeStream, [128](#)
- encodeOctStr
 - ASN1BEREncodeStream, [129](#)
- encodeReal
 - ASN1BEREncodeStream, [130](#)
- encodeRelativeOID
 - ASN1BEREncodeStream, [130](#)
- encodeTag
 - ASN1BEREncodeStream, [131](#)
- encodeTagAndIndefLen
 - ASN1BEREncodeStream, [131](#)
- encodeTagAndLen
 - ASN1BEREncodeStream, [131](#)
- encodeUInt
 - ASN1BEREncodeStream, [132](#)
- encodeUInt16
 - ASN1BEREncodeStream, [132](#)
- encodeUInt64
 - ASN1BEREncodeStream, [133](#)
- encodeUInt8
 - ASN1BEREncodeStream, [133](#)
- encodeUnivStr
 - ASN1BEREncodeStream, [133](#)
- findElement
 - ASN1BERDecodeBuffer, [91](#)
- flush
 - ASN1BERDecodeStream, [109](#)
 - ASN1BEREncodeStream, [134](#)
- freeBuffer
 - ASN1BEREncodeBuffer, [118](#)
- getAppInfo
 - ASN1BERDecodeStream, [110](#)
 - ASN1BEREncodeStream, [134](#)
- getContext
 - ASN1BERDecodeStream, [110](#)
 - ASN1BEREncodeStream, [134](#)
- getCtxtPtr
 - ASN1BERDecodeStream, [110](#)
 - ASN1BEREncodeStream, [134](#)
- getErrorInfo
 - ASN1BERDecodeStream, [110](#)
 - ASN1BEREncodeStream, [135](#)
- getMsgCopy
 - ASN1BEREncodeBuffer, [118](#)
- getMsgPtr
 - ASN1BERDecodeBuffer, [91](#)
 - ASN1BEREncodeBuffer, [118](#)
- getPosition
 - ASN1BERDecodeStream, [111](#)
- getStatus
 - ASN1BERDecodeStream, [111](#)
 - ASN1BEREncodeStream, [135](#)
- getTLVLength
 - ASN1BERDecodeStream, [111](#)
- hexDump
 - ASN1BERMessageBuffer, [139](#)
- init
 - ASN1BERDecodeBuffer, [92](#)
 - ASN1BEREncodeBuffer, [118](#)
- isA
 - ASN1BERDecodeBuffer, [92](#)
 - ASN1BERDecodeStream, [111](#)
 - ASN1BEREncodeBuffer, [119](#)
 - ASN1BEREncodeStream, [135](#)
- isOpened
 - ASN1BERDecodeStream, [112](#)
 - ASN1BEREncodeStream, [136](#)
- mark
 - ASN1BERDecodeStream, [112](#)
- markSupported
 - ASN1BERDecodeStream, [112](#)
- operator<<
 - ASN1BEREncodeBuffer, [119](#)
 - ASN1BEREncodeStream, [136](#)
- operator>>
 - ASN1BERDecodeBuffer, [92](#)
 - ASN1BERDecodeStream, [113](#)
- parseTagLen
 - ASN1BERDecodeBuffer, [92](#)
- peekTagAndLen
 - ASN1BERDecodeStream, [113](#)
- printErrorInfo
 - ASN1BERDecodeStream, [113](#)
 - ASN1BEREncodeStream, [136](#)
- read
 - ASN1BERDecodeStream, [113](#)
- readBinaryFile
 - ASN1BERDecodeBuffer, [93](#)

- readBlocking
 - ASN1BERDecodeStream, [114](#)
- readTLV
 - ASN1BERDecodeStream, [114](#)
- reset
 - ASN1BERDecodeStream, [114](#)
- resetErrorInfo
 - ASN1BERDecodeStream, [115](#)
 - ASN1BEREncodeStream, [136](#)
- setAppInfo
 - ASN1BERDecodeStream, [115](#)
 - ASN1BEREncodeStream, [136](#)
- setBuffer
 - ASN1BERDecodeBuffer, [93](#)
 - ASN1BEREncodeBuffer, [119](#)
- setDiag
 - ASN1BERDecodeStream, [115](#)
 - ASN1BEREncodeStream, [136](#)
- setPosition
 - ASN1BERDecodeStream, [115](#)
- skip
 - ASN1BERDecodeStream, [115](#)
- Streaming BER Runtime Library Functions., [53](#)
- write
 - ASN1BEREncodeStream, [137](#)
- xd_16BitCharStr
 - berdecruntime, [11](#)
- xd_32BitCharStr
 - berdecruntime, [11](#)
- xd_bigint
 - berdecruntime, [12](#)
- xd_bitstr
 - berdecruntime, [12](#)
- xd_bitstr_s
 - berdecruntime, [13](#)
- xd_boolean
 - berdecruntime, [13](#)
- xd_charstr
 - berdecruntime, [14](#)
- xd_chkend
 - berdecruntime, [14](#)
- xd_count
 - berdecruntime, [15](#)
- xd_enum
 - berdecruntime, [15](#)
- xd_enumUnsigned
 - berdecruntime, [15](#)
- xd_indeflen_ex
 - berdecruntime, [16](#)
- xd_int16
 - berdecruntime, [16](#)
- xd_int64
 - berdecruntime, [16](#)
- xd_int8
 - berdecruntime, [17](#)
- xd_integer
 - berdecruntime, [17](#)
- xd_len
 - berdecruntime, [18](#)
- xd_match
 - berdecruntime, [18](#)
- xd_match1
 - berdecruntime, [18](#)
- xd_memcpy
 - berdecruntime, [19](#)
- xd_NextElement
 - berdecruntime, [19](#)
- xd_null
 - berdecruntime, [19](#)
- xd_objid
 - berdecruntime, [20](#)
- xd_octstr
 - berdecruntime, [20](#)
- xd_octstr_s
 - berdecruntime, [21](#)
- xd_oid64
 - berdecruntime, [21](#)
- xd_OpenType
 - berdecruntime, [21](#)
- xd_OpenTypeAppend
 - berdecruntime, [22](#)
- xd_OpenTypeExt
 - berdecruntime, [22](#)
- xd_real
 - berdecruntime, [23](#)
- xd_real10
 - berdecruntime, [23](#)
- xd_reloid
 - berdecruntime, [23](#)
- xd_setp
 - berdecruntime, [24](#)
- xd_tag
 - berdecruntime, [24](#)
- xd_Tag1AndLen
 - berdecruntime, [25](#)
- xd_tag_len
 - berdecruntime, [25](#)
- xd_uint16
 - berdecruntime, [25](#)
- xd_uint64
 - berdecruntime, [26](#)
- xd_uint8
 - berdecruntime, [26](#)
- xd_unsigned
 - berdecruntime, [27](#)
- xd_utf8str

- berdecruntime, 10
- xdf_len
 - berderfilefun, 28
- xdf_ReadContents
 - berderfilefun, 28
- xdf_ReadPastEOC
 - berderfilefun, 29
- xdf_tag
 - berderfilefun, 29
- xdf_TagAndLen
 - berderfilefun, 30
- xe_16BitCharStr
 - berencruntime, 32
- xe_32BitCharStr
 - berencruntime, 33
- xe_bigint
 - berencruntime, 33
- xe_bitstr
 - berencruntime, 34
- xe_boolean
 - berencruntime, 34
- xe_charstr
 - berencruntime, 35
- xe_derCanonicalSort
 - berencruntime, 35
- xe_derReal10
 - berencruntime, 35
- xe_enum
 - berencruntime, 36
- xe_enumUnsigned
 - berencruntime, 36
- xe_expandBuffer
 - berencruntime, 36
- xe_free
 - berencruntime, 37
- xe_getBufLocDescr
 - berencruntime, 37
- xe_getp
 - berencruntime, 37
- xe_identifier
 - berencruntime, 38
- xe_int16
 - berencruntime, 38
- xe_int64
 - berencruntime, 38
- xe_int8
 - berencruntime, 39
- xe_integer
 - berencruntime, 39
- xe_len
 - berencruntime, 39
- xe_memcpy
 - berencruntime, 40
- xe_null
 - berencruntime, 40
- xe_objid
 - berencruntime, 40
- xe_octstr
 - berencruntime, 41
- xe_oid64
 - berencruntime, 41
- xe_OpenType
 - berencruntime, 41
- xe_OpenTypeExt
 - berencruntime, 42
- xe_real
 - berencruntime, 42
- xe_real10
 - berencruntime, 42
- xe_reloid
 - berencruntime, 43
- xe_setp
 - berencruntime, 43
- xe_tag
 - berencruntime, 43
- xe_tag_len
 - berencruntime, 44
- xe_TagAndIndefLen
 - berencruntime, 44
- xe_uint16
 - berencruntime, 44
- xe_uint64
 - berencruntime, 45
- xe_uint8
 - berencruntime, 45
- xe_unsigned
 - berencruntime, 46
- xe_utf8str
 - berencruntime, 32
- xu_alloc_array
 - berperUtil, 50
- xu_dump
 - berperUtil, 51
- xu_dump2
 - berperUtil, 51
- xu_fdump
 - berperUtil, 52
- xu_hex_dump
 - berperUtil, 48
- xu_RestoreBufferState
 - berperUtil, 52
- xu_SaveBufferState
 - berperUtil, 52